

Technical data:
Insulator body:

Glass filled thermoplastic Polyester.
self-extinguishing, rated

Current Rating:
Contact



3 AMP.


plating

Phosphor bronze
Gold or tin over nickel

Operating Temperature:

-40°C to +105°C.

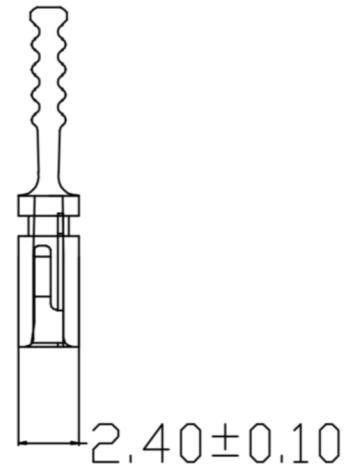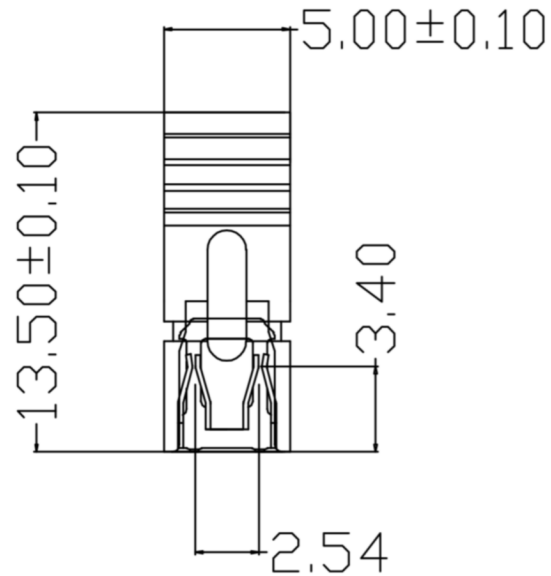

产品名称 TITLE		MJ-6B2.54*13.5		材料 MATERIAL		版本 VER		单位 UNITS	MM	日期 DATE	2010/3/18	
零件名称 ACCESSORY			数量 QNTY		比例 SCALE			制图 DRAWN				角法 DROJ
深圳市金航标电子有限公司 www.kinghelm.com.cn KH-2.54TXM-CB-13.5H-R 0755-28190160						一般公差		审核 CHK'D 核准 APPROVED		 第三角法		
						x	±0.10					
						.x	±0.01					
						.xx	±0.002					
						x.xx	±5°					

变更次数	变更内容 Content of Change	担当 ACT
------	---------------------------	-----------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [Kinghelm](#) *manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [M90C108951C](#)
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [80.063.4001.1](#)
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-024-10-](#)
[001000](#) [803-93-012-10-001000](#)