

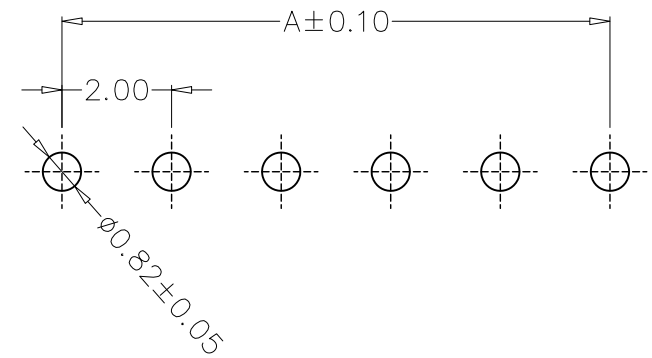


SPECIFICATIONS


- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{M}\Omega$ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer PBT, UL94V-0
PIN Brass Tin-plated

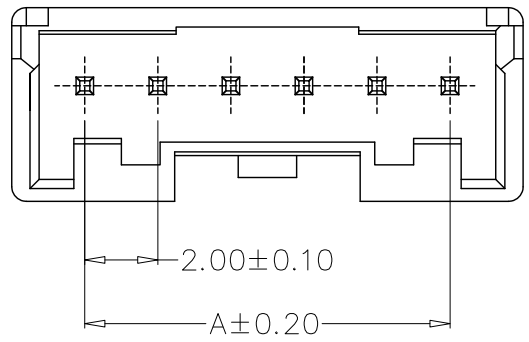

PCB LAYOUT

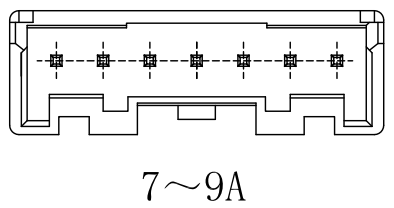

7~9A

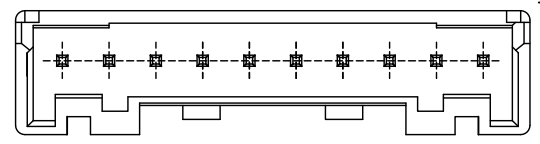

10~16A

编 号	尺寸 (mm)	
	A	B
A2026-02A	2.00	6.00
A2026-03A	4.00	8.00
A2026-04A	6.00	10.00
A2026-05A	8.00	12.00
A2026-06A	10.00	14.00
A2026-07A	12.00	16.00
A2026-08A	14.00	18.00
A2026-09A	16.00	20.00
A2026-10A	18.00	22.00
A2026-11A	20.00	24.00
A2026-12A	22.00	26.00
A2026-16A	30.00	34.00

GENERAL TOLERANCE		制图	钱岳生		料号	A2026-NA		版本	A
X.±0.25	X.*±2'	DRAWING	2021、05、03		PART NO.			REV.	
.X±0.20	.X'±1'	审核	张名		品名	PA直针		页次	1/1
.XX±0.15	.XX'±0.5'	CHECK	2021、05、04		TITLE	WAFER DIP TYPE		SHEET	
.XXX±0.10	.XXX'±0.5'	核准	张名		客户料号				
		APPROVAL	2021、05、05		CUTM. NO.				
		单位	MM	比例	深圳市金航标电子有限公司		www.kinghel.m.com.cn		
		UNITS		SCALE	KH-A2026-09A		0755-28190160		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Kinghelm](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)