

Ordering Information:

A2541WR-XP - $\frac{***}{2}$ - $\frac{***}{3}$ - $\frac{*}{4}$

1.Part No.

2.Size(H):

(blank): 2.54mm

H15: 1.50mm

H17: 1.70mm

H20: 2.00mm

H30: 3.00mm

3.Material:

(blank): PBT,UL94V-0


6T: Nylon 6T,UL94V-0

GWT: Nylon 6T,UL94V-0,GWT 750°C

4.Finish:

(blank): Gold over Nickel

T: Tin over Nickel

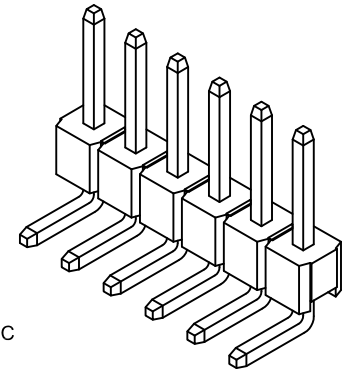

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max



Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute



Pin Material: Brass/Gold over Nickel

Material: PBT, UL94V-0(Black)

Ordering Information & Dimensions

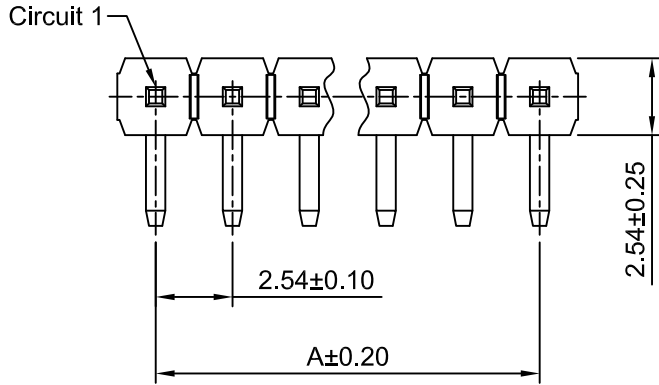

P.C.B LAYOUT

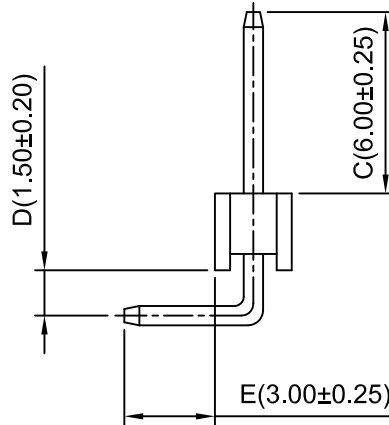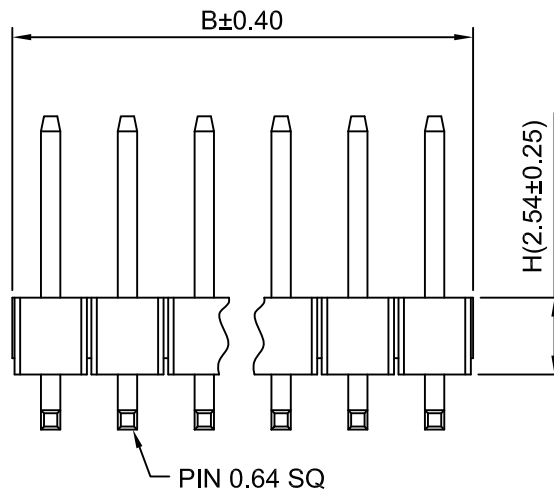

| Circuits | Dim(mm) | | Circuits | Dim(mm) | | Circuits | Dim(mm) | |
|----------|---------|-------|----------|---------|-------|----------|---------|--------|
| | A | B | | A | B | | A | B |
| 2P | 2.54 | 5.08 | 15P | 35.56 | 38.10 | 28P | 68.58 | 71.12 |
| 3P | 5.08 | 7.62 | 16P | 38.10 | 40.64 | 29P | 71.12 | 73.66 |
| 4P | 7.62 | 10.16 | 17P | 40.64 | 43.18 | 30P | 73.66 | 76.20 |
| 5P | 10.16 | 12.70 | 18P | 43.18 | 45.72 | 31P | 76.20 | 78.74 |
| 6P | 12.70 | 15.24 | 19P | 45.72 | 48.26 | 32P | 78.74 | 81.28 |
| 7P | 15.24 | 17.78 | 20P | 48.26 | 50.80 | 33P | 81.28 | 83.82 |
| 8P | 17.78 | 20.32 | 21P | 50.80 | 53.34 | 34P | 83.82 | 86.36 |
| 9P | 20.32 | 22.86 | 22P | 53.34 | 55.88 | 35P | 86.36 | 88.90 |
| 10P | 22.86 | 25.40 | 23P | 55.88 | 58.42 | 36P | 88.90 | 91.44 |
| 11P | 25.40 | 27.94 | 24P | 58.42 | 60.96 | 37P | 91.44 | 93.98 |
| 12P | 27.94 | 30.48 | 25P | 60.96 | 63.50 | 38P | 93.98 | 96.52 |
| 13P | 30.48 | 33.02 | 26P | 63.50 | 66.04 | 39P | 96.52 | 99.06 |
| 14P | 33.02 | 35.56 | 27P | 66.04 | 68.58 | 40P | 99.06 | 101.60 |

深圳市金航标电子有限公司

WWW. BDS666. COM

KH-A2541WR-4P

0755-83044319

| | | | | |
|------------------------------------|--------------|------------------------|--------------------------------|----------------------------------|
| Unit mm | Scale 4:1 | Sheet 1 of 1 | Title : 2.54mm Pitch | |
| Draw By: Diankui Wan | | Approved : Jack Yin | | 90° Single Row Pin Header |
| General Tolerance | | | | |
| A2 CHANGE THE TOLERANCE 2019.09.06 | | PROJECT | | DRAW NO : A2541WR-XP |
| A1 updated version 2018.03.30 | | REV | | |
| A0 NEW RELEASE 2005.07.01 | | DESCRIPTION | | REV A2 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Kinghelm](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)