


SECTION A-A

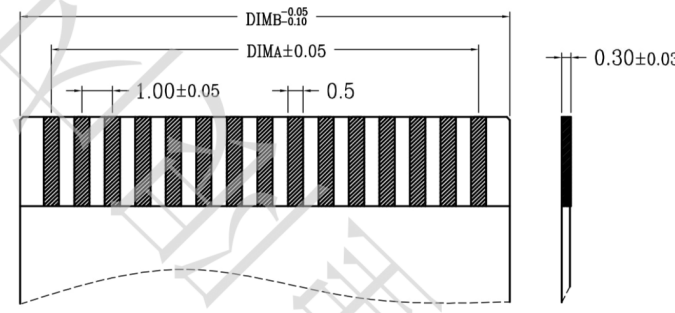

适用扁平线

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C~85° C.
3. 额定电压: 50V, AC/DC(等效).
4. 接触电阻: ≤0.03Ω.
5. 绝缘电阻: ≥500MΩ

一般公差 (TOLERANCE)  
 X ±0.60 XX ±1.0  
 X ±0.20 XXX ±0.5  
 ANGLES ±1°

| 序号 | 品名               | 材质             |
|----|------------------|----------------|
| ①  | 1.0K型胶芯 (H2.5)   | LCP UL94V-0 本色 |
| ②  | 1.0K型上接端子 (H2.5) | 磷青铜/表面镀锡       |
| ③  | 1.0K型后盖 (H2.5)   | LCP UL94V-0 黑色 |
| ④  | 1.0K型卧式焊片 (H2.5) | 黄铜/表面镀锡        |

| CKT | DIM A | DIM B | DIM C |
|-----|-------|-------|-------|
| 4   | 3.00  | 5.03  | 11.00 |
| 5   | 4.00  | 6.03  | 12.00 |
| 6   | 5.00  | 7.03  | 13.00 |
| 7   | 6.00  | 8.03  | 14.00 |
| 8   | 7.00  | 9.03  | 15.00 |
| 9   | 8.00  | 10.03 | 16.00 |
| 10  | 9.00  | 11.03 | 17.00 |
| 11  | 10.00 | 12.03 | 18.00 |
| 12  | 11.00 | 13.03 | 19.00 |
| 13  | 12.00 | 14.03 | 20.00 |
| 14  | 13.00 | 15.03 | 21.00 |
| 15  | 14.00 | 16.03 | 22.00 |
| 16  | 15.00 | 17.03 | 23.00 |
| 17  | 16.00 | 18.03 | 24.00 |
| 18  | 17.00 | 19.03 | 25.00 |
| 19  | 18.00 | 20.03 | 26.00 |
| 20  | 19.00 | 21.03 | 27.00 |
| 21  | 20.00 | 22.03 | 28.00 |
| 22  | 21.00 | 23.03 | 29.00 |
| 23  | 22.00 | 24.03 | 30.00 |
| 24  | 23.00 | 25.03 | 31.00 |
| 25  | 24.00 | 26.03 | 32.00 |
| 26  | 25.00 | 27.03 | 33.00 |
| 27  | 26.00 | 28.03 | 34.00 |
| 28  | 27.00 | 29.03 | 35.00 |
| 29  | 28.00 | 30.03 | 36.00 |
| 30  | 29.00 | 31.03 | 37.00 |
| 31  | 30.00 | 32.03 | 38.00 |
| 32  | 31.00 | 33.03 | 39.00 |
| 33  | 32.00 | 34.03 | 40.00 |
| 34  | 33.00 | 35.03 | 41.00 |
| 35  | 34.00 | 36.03 | 42.00 |
| 36  | 35.00 | 37.03 | 43.00 |
| 37  | 36.00 | 38.03 | 44.00 |
| 38  | 37.00 | 39.03 | 45.00 |
| 39  | 38.00 | 40.03 | 46.00 |
| 40  | 39.00 | 41.03 | 47.00 |

深圳市金航标电子有限公司 WWW.BDS666.COM  
 KH-CL1.0-H2.5-29PS 0755-83044319

|  |                      |
|--|----------------------|
| 品名 (TITLE)<br>1.0 Pitch K型卧式上接 (H=2.5) | 制图 (DR)<br>贺骏驹       |
| 料号 (DWG.NO)<br>2051-XXXX               | 校对 (CHKD)<br>赖积任     |
| 比例 (SCALE)<br>1:1                      | 审核 (APPD)<br>杜承凯     |
| 单位 (UNITS)<br>mm                       | 张数 (SHEET)<br>1 OF 1 |
|  | 尺寸 (SIZE)<br>A4      |
|  | 版数 (REV)<br>1        |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [FFC & FPC Connectors](#) category:*

*Click to view products by [Kinghelm](#) manufacturer:*

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [52746-1671-TR250](#) [10051922-1610EHLF](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [20FLH-RSM1-TB](#) [207356-1](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#) [046283021002868+](#) [FFC05011-10SBB114W5M](#) [502250-8027](#) [67000-008LF](#) [200528-0260](#) [FH28K-10S-0.5SH](#) [FH52K-6S-0.5SH](#) [0.5K-DX-30PWB](#) [DS1020-08-10VBT12](#) [THD0515-34CL-GF](#) [X05A10L28G](#) [ECC2841061EU](#) [1.0K-DHQX-16PWB](#) [1.0K-DHQX-30PWB](#) [1775333-6](#) [10054365-202110ELF](#) [10054365-242110ELF](#) [10054365-282110ELF](#) [10064555-392220HLF](#) [59453-041110EBHLF](#) [59453-091110EDHLF](#) [62674-241141ALF](#) [62684-432100ALF](#) [62684-451100AHLF](#) [62684-5721N0ALF](#) [HFW11R-1STE1MTLF](#) [HFW12R-1STE9LF](#) [HFW14R-1STE9MTLF](#) [HFW18S-2STE9LF](#)