


|      |         |     |          |
|------|---------|-----|----------|
| REV  | CONTENT | CHK | DATE     |
| V0.1 | 修改公差    | CXL | 15.04.20 |

- NOTES:
1. Rating:300V 15A ;
  2. Insulation Withstands Voltage: AC2000V/MIN
  3. Insulation Resistance: 500MΩ or more at DC500V
  4. Using Temperature Range: -40°C~+105°C
  5. "★" is the important dimension

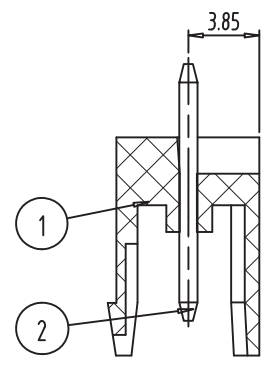

SECTION:A-A

| Total Pitch Tolerances in mm |         |         |         |         |          |          |          |          |          | Nominal dimension range in mm |         |         |         |         |          |          |          |          |          | ⊥    | ≡     | -     | //    |      |        |        |      |        |        |     |
|------------------------------|---------|---------|---------|---------|----------|----------|----------|----------|----------|-------------------------------|---------|---------|---------|---------|----------|----------|----------|----------|----------|------|-------|-------|-------|------|--------|--------|------|--------|--------|-----|
| over 0                       | over 30 | over 53 | over 70 | over 90 | over 115 | over 150 | over 250 | over 350 | over 500 | over 0                        | over 30 | over 53 | over 70 | over 90 | over 115 | over 150 | over 200 | over 250 | over 320 | to 0 | to 10 | to 10 | to 10 | to 0 | to 100 | to 150 | to 0 | to 100 | to 150 |     |
| ±0.18                        | ±0.20   | ±0.25   | ±0.3    | ±0.35   | ±0.44    | ±0.60    | ±0.70    | ±0.85    | ±0.20    | ±0.25                         | ±0.30   | ±0.35   | ±0.44   | ±0.55   | ±0.70    | ±0.80    | ±0.90    | 0.2      | 0.3      | 0.3  | 0.3   | 0.2   | 0.3   | 0.5  | 0.2    | 0.3    | 0.5  | 0.2    | 0.3    | 0.5 |

|                   |              |             |            |                     |             |
|-------------------|--------------|-------------|------------|---------------------|-------------|
| 2                 | SOLDER.PIN   | ZF300B0001  | P          | BRASS               | Tin Plated  |
| 1                 | HOUSING      | ZF600A0XXXX | 1          | PA66                | UL94V-0     |
| ITEM              | NAME OF PART | NO. OF PART | Q'TY       | MATERIAL            | NOTE        |
| DWG.              | SK           | DATE        | 2014/08/20 | SIZE A4             | UNITS mm    |
| CHK.              |              | DATE        |            | SCALE 2.5:1         | 2EDG-7.62   |
| APP.              |              | DATE        |            | NAME                | F600V-XXP-X |
| 深圳市金航标电子有限公司      |              |             |            | www.kinghelm.com.cn |             |
| KH-F600V-9P-7.62G |              |             |            | 0755-28190160       |             |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [Kinghelm](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)