
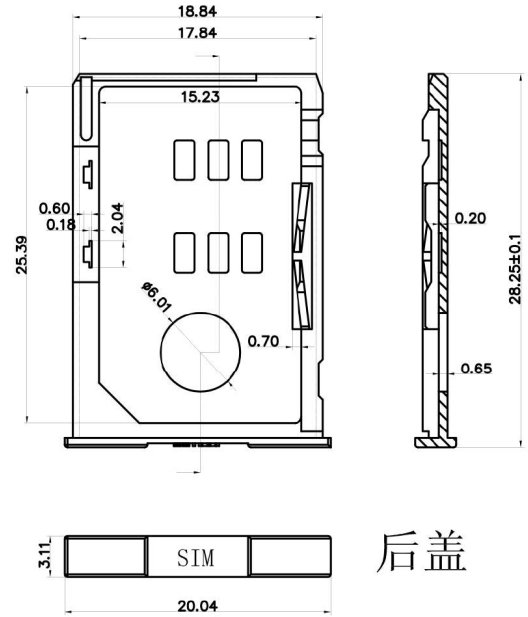


**SPECIFICATIONS**

Current Rating: 3Amps  
 Insulator body: L C P  
 Insulator Resistance: 5000Mw Min  
 Dielectric Withstanding: DC 500V  
 Contact Resistance: 20MW Max  
 Durability: 100gf Cycls Min  
 Contact Material: Copper alloy  
 Finish : Tin Gold or Duplex plated  
 Standard: Gold flash all over Nickel  
 Operating Temperature: -55°C+105°C  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)


注明:带号码球的为检验尺寸,带▲为重要检验尺寸

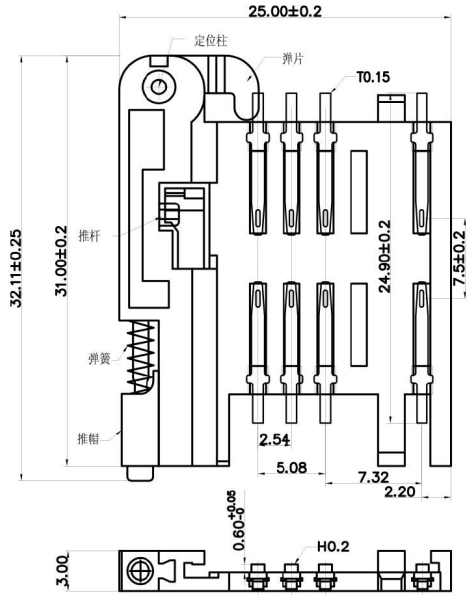

**Ordering Information**

7420 08 M S3 B T 04


No.of Pins Per Row 08=8P  
 Connector Type S=Straight R=Right Angle M=SMT  
 Contact Plating G0:Gold Flash G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold S0:Gold Flash/Tin S3:5U"Gold Flash/Tin SN:Tin  
 Insulator Color B=Black G=Grey

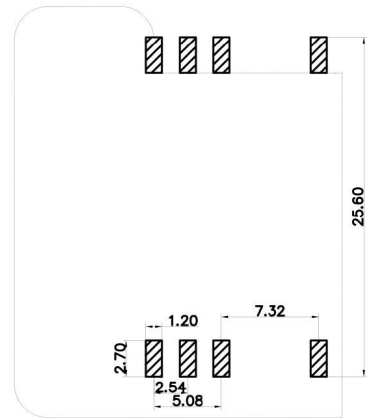

RECOMMEND P. C. BOARD LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

技术详询



型号: KH-SIM2-2.54-8F		OPERATION		DRAW	WZG	14.04.11	SCALE	FIT	深圳市金航标电子有限公司	
		X.X	±0.30	CHECK			UNIT	mm		
		X.XX	±0.20				SIZE	A4		
		X.XXX	±0.10				SHEET	1/1	PART NO.	742008MS3BT04
AO	2012.09.11	NEW DRAWING		Angle	±3°	APPROVE			TITLE:	A卡座 8P
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL		PROJ.	◆	客户料号:	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Card Edge Connectors](#) category:*

*Click to view products by [Kinghelm](#) manufacturer:*

Other Similar products are found below :

[6565204-6](#) [PKC-156](#) [1437274-4](#) [147889-1](#) [1489165-4](#) [EBT156-12B1X](#) [EBT15622B2X](#) [EBT156-22R2W](#) [1-582587-1](#) [1-582589-1](#) [2-6437275-9](#) [284-0102-12100](#) [306022901000000](#) [307-012-502-202](#) [307-024-526-201](#) [307-056-520-300](#) [307-080-526-208](#) [1926088-2](#) [245-062-520-350](#) [287-0032-12101](#) [306-010-500-112](#) [306-028-525-102](#) [306-240-318](#) [307-036-502-202](#) [307-036-521-301](#) [307-072-526-202](#) [345-060-559-303](#) [368-004-520-201](#) [392-008-559-201](#) [534671-1](#) [5-530501-5](#) [341-240-317](#) [345-029-520-300](#) [345-030-500-301](#) [345-044-500-300](#) [345-220-058](#) [346-240-318](#) [357-030-526-201](#) [387-012-523-300](#) [395-044-520-300](#) [395-100-524-300](#) [50-12B-10](#) [50-6SN-5](#) [09-07-2032](#) [10035388-106LF](#) [10035388-802LF](#) [10115859-011LF](#) [10122859-009LF](#) [101269333204245CLF](#) [10127905-B04B24BLF](#)