## Memory Module Specifications



### **KVR13LE9S8/4**

4GB 1Rx8 512M x 72-Bit PC3L-10600 CL9 240-Pin ECC DIMM

#### DESCRIPTION

This document describes ValueRAM's 512M x 72-bit (4GB) DDR3L-1333 CL9 SDRAM (Synchronous DRAM), 1Rx8, ECC, low voltage, memory module, based on nine 512M x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR3-1333 timing of 9-9-9 at 1.35V or 1.5V. This 240-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

#### **FEATURES**

- JEDEC standard 1.35V (1.28V ~ 1.45V) and 1.5V (1.425V ~ 1.575V) Power Supply
- VDDQ = 1.35V (1.28V ~ 1.45V) and 1.5V (1.425V ~ 1.575V)
- 667MHz fCK for 1333Mb/sec/pin
- 8 independent internal bank
- Programmable CAS Latency: 9, 8, 7, 6
- Programmable Additive Latency: 0, CL 2, or CL 1 clock
- 8-bit pre-fetch
- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- Bi-directional Differential Data Strobe
- Thermal Sensor Grade B
- Internal(self) calibration: Internal self calibration through ZQ pin (RZQ: 240 ohm ± 1%)
- On Die Termination using ODT pin
- Average Refresh Period 7.8us at lower than TCASE 85°C, 3.9us at 85°C < TCASE ≤ 95°C</li>
- · Asynchronous Reset
- PCB: Height 1.18" (30mm), single sided component


## **SPECIFICATIONS**


CL(IDD)	9 cycles
Row Cycle Time (tRCmin)	49.5ns (min.)
Refresh to Active/Refresh Command Time (tRFCmin)	260ns (min.)
Row Active Time (tRASmin)	36ns (min.)
Maximum Operating Power	(1.35V) = 1.761 W*
	$(1.50V) = 1.957 W^*$
UL Rating	94 V - 0
Operating Temperature	0° C to 85° C
Storage Temperature	-55° C to +100° C


<sup>\*</sup>Power will vary depending on the SDRAM.

Continued >>

## **MODULE DIMENSIONS:**

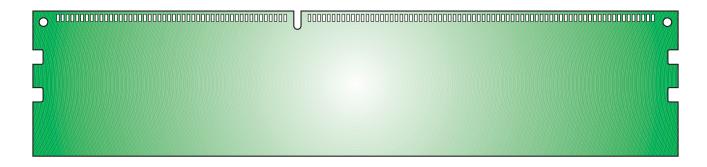

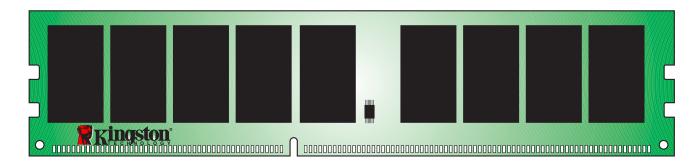

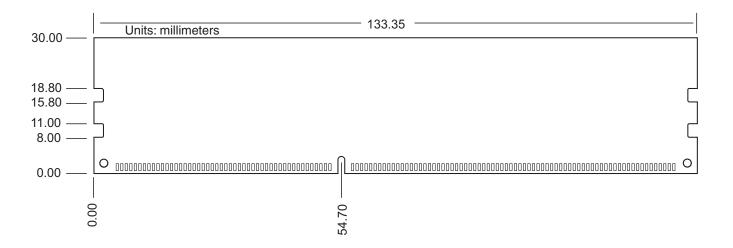

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for kingston manufacturer:

Other Similar products are found below:

SDCA3/32GB SM2280S3G2/120G 04EPOP08-NL3DM627-B02U SD4/32GB SEDC400S37/960G EMMC16G-W525-X01U 08EPOP04-NL3DT227-A01U SEDC1000H/1600G 04EMCP04-NL2DM627-Z02U 08EMCP04-NL3DT227-A01U B1621PM1WDGTKR-U B5116ECMDXGGB-U EMMC04G-W100-E08U SDA10/128GB KVR13N9S8H/4 D5128EETBPGGBU-U SDA3/32GB D5128EC4BPGGBUI-U SKC400S37/1T KVR21R15D4/16 CF/256 SUV400S37/240G SKC400S37/512G