Memory Module Specifications



KVR16LE11S8/4

4GB 1Rx8 512M x 72-Bit PC3L-12800 CL11 240-Pin ECC DIMM

DESCRIPTION

This document describes ValueRAM's 512M x 72-bit (4GB) DDR3L-1600 CL11 SDRAM (Synchronous DRAM), 1Rx8, ECC, low voltage, memory module, based on nine 512M x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR3-1600 timing of 11-11-11 at 1.35V or 1.5V. This 240-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES


- JEDEC standard 1.35V (1.28V ~ 1.45V) and 1.5V (1.425V ~ 1.575V) Power Supply
- VDDQ = 1.35V (1.28V ~ 1.45V) and 1.5V (1.425V ~ 1.575V)
- 800MHz fCK for 1600Mb/sec/pin
- 8 independent internal bank
- Programmable CAS Latency: 11, 10, 9, 8, 7, 6
- Programmable Additive Latency: 0, CL 2, or CL 1 clock
- 8-bit pre-fetch
- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- Bi-directional Differential Data Strobe
- Thermal Sensor Grade B
- Internal(self) calibration : Internal self calibration through ZQ pin (RZQ : 240 ohm ± 1%)
- On Die Termination using ODT pin
- Average Refresh Period 7.8us at lower than TCASE 85°C, 3.9us at 85°C < TCASE ≤ 95°C
- Asynchronous Reset
- PCB: Height 1.18" (30mm), single sided component


SPECIFICATIONS


CL(IDD)	11 cycles
Row Cycle Time (tRCmin)	48.125ns (min.)
Refresh to Active/Refresh Command Time (tRFCmin)	260ns (min.)
Row Active Time (tRASmin)	35ns (min.)
Maximum Operating Power	(1.35V) = 1.822 W*
	(1.50V) = 2.025 W*
UL Rating	94 V - 0
Operating Temperature	0° C to 85° C
Storage Temperature	-55° C to +100° C

*Power will vary depending on the SDRAM.

MODULE DIMENSIONS:

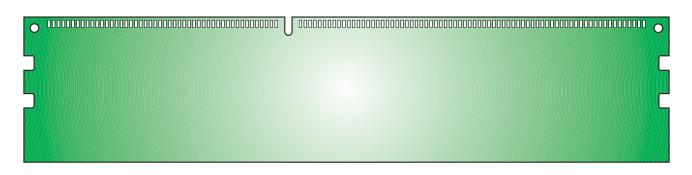

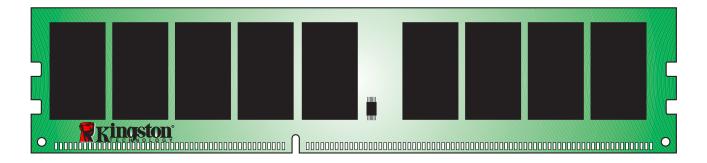

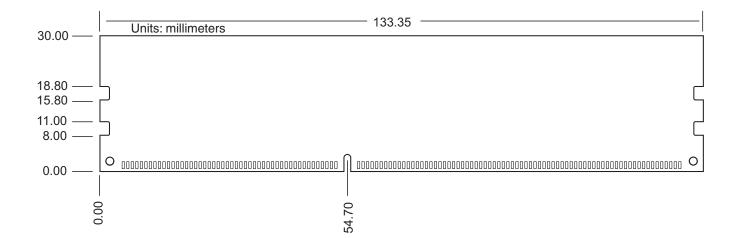

Page 2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for kingston manufacturer:

Other Similar products are found below :

 SDCA3/32GB
 SM2280S3G2/120G
 04EPOP08-NL3DM627-B02U
 SD4/32GB
 SEDC400S37/960G
 EMMC16G-W525-X01U
 08EPOP04

 NL3DT227-A01U
 SEDC1000H/1600G
 04EMCP04-NL2DM627-Z02U
 08EMCP04-NL3DT227-A01U
 B1621PM1WDGTKR-U

 B5116ECMDXGGB-U
 EMMC04G-W100-E08U
 SDA10/128GB
 KVR13N9S8H/4
 D5128EETBPGGBU-U
 SDA3/32GB

 D5128EC4BPGGBUI-U
 SKC400S37/1T
 KVR21R15D4/16
 CF/256
 SUV400S37/240G
 SKC400S37/512G
 EMMC04G-M627-A01

 BOXSIZE 4
 BOXSIZE 3
 BOXSIZE 3
 SA
 SA
 SA
 SA
 SA