Memory Module Specifications



KVR16LR11S4K4/32I

32GB (8GB 1G x 72-Bit x 4 pcs.) PC3L-12800 CL11 Registered w/Parity 240-Pin DIMM Kit

DESCRIPTION

ValueRAM's KVR16LR11S4K4/32I is a kit of four 1G x 72-bit (8GB) DDR3L-1600 CL11 SDRAM (Synchronous DRAM), low voltage, registered w/parity, 1Rx4 ECC, Intel® Compatibility Tested, memory modules, based on eighteen 1G x 4-bit FBGA components per module. Total kit capacity is 32GB. The SPDs are programmed to JEDEC standard latency DDR3-1600 timing of 11-11-11 at 1.35V or 1.5V. Each 240-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- JEDEC standard 1.35V (1.28V ~ 1.45V) and 1.5V (1.425V ~ 1.575V) Power Supply
- VDDQ = 1.35V (1.28V ~ 1.45V) and 1.5V (1.425V ~ 1.575V)
- 800MHz fCK for 1600Mb/sec/pin
- 8 independent internal bank
- Programmable CAS Latency: 11, 10, 9, 8, 7, 6
- Programmable Additive Latency: 0, CL 2, or CL 1 clock
- 8-bit pre-fetch
- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- · Bi-directional Differential Data Strobe
- Internal(self) calibration: Internal self calibration through ZQ pin (RZQ: 240 ohm ± 1%)
- On Die Termination using ODT pin
- On-DIMM thermal sensor (Grade B)
- Average Refresh Period 7.8us at lower than TCASE 85°C, 3.9us at 85°C < TCASE ≤ 95°C
- Asynchronous Reset
- PCB: Height 1.180" (30.00mm), double sided component


SPECIFICATIONS

| CL(IDD) | 11 cycles |
|---|----------------------------------|
| Row Cycle Time (tRCmin) | 48.125ns (min.) |
| Refresh to Active/Refresh Command Time (tRFCmin) | 260ns (min.) |
| Row Active Time (tRASmin) | 35ns (min.) |
| Maximum Operating Power | (1.35V) = 4.311 W* Per module |
| UL Rating | 94 V - 0 |
| Operating Temperature | 0° C to 85° C |
| Storage Temperature | -55° C to +100° C |
| | |


^{*}Power will vary depending on the SDRAM and Register/PLL used.

Continued >>

MODULE DIMENSIONS:

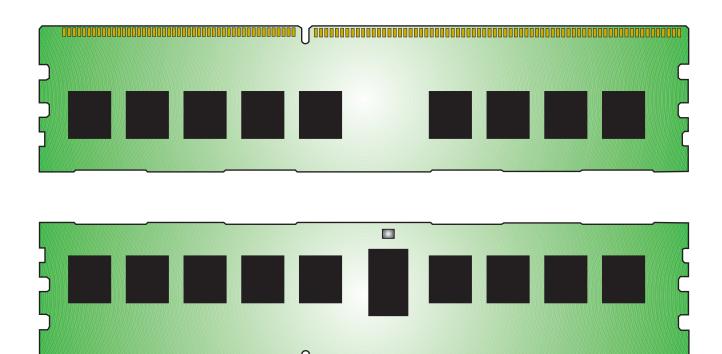

(units = millimeters)

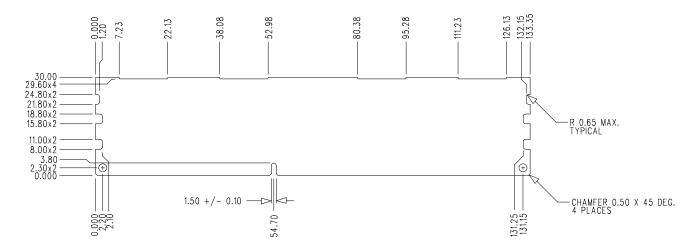

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for kingston manufacturer:

Other Similar products are found below:

SDCA3/32GB SM2280S3G2/120G 04EPOP08-NL3DM627-B02U SD4/32GB SEDC400S37/960G EMMC16G-W525-X01U 08EPOP04-NL3DT227-A01U SEDC1000H/1600G 04EMCP04-NL2DM627-Z02U 08EMCP04-NL3DT227-A01U B1621PM1WDGTKR-U B5116ECMDXGGB-U EMMC04G-W100-E08U SDA10/128GB KVR13N9S8H/4 D5128EETBPGGBU-U SDA3/32GB D5128EC4BPGGBUI-U SKC400S37/1T KVR21R15D4/16 CF/256 SUV400S37/240G SKC400S37/512G EMMC04G-M627-A01 BOXSIZE 4 BOXSIZE 3