

## KVR16R11D4K4/64

64GB (16GB 2G x 72-Bit x 4 pcs.) PC3-12800  
CL11 Registered w/Parity 240-Pin DIMM Kit

### DESCRIPTION

ValueRAM's KVR16R11D4K4/64 is a kit of four 2G x 72-bit (16GB) DDR3-1600 CL11 SDRAM (Synchronous DRAM), registered w/parity, 2Rx4 ECC memory modules, based on thirty-six 1G x 4-bit FBGA components per module. Total kit capacity is 64GB. The SPDs are programmed to JEDEC standard latency DDR3-1600 timing of 11-11-11 at 1.5V. Each 240-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

### FEATURES

- JEDEC standard 1.5V (1.425V ~1.575V) Power Supply
- VDDQ = 1.5V (1.425V ~ 1.575V)
- 800MHz fCK for 1600Mb/sec/pin
- 8 independent internal bank
- Programmable CAS Latency: 11, 10, 9, 8, 7, 6
- Programmable Additive Latency: 0, CL - 2, or CL - 1 clock
- 8-bit pre-fetch
- Burst Length: 8 (Interleave without any limit, sequential with starting address "000" only), 4 with tCCD = 4 which does not allow seamless read or write [either on the fly using A12 or MRS]
- Bi-directional Differential Data Strobe
- Internal(self) calibration : Internal self calibration through ZQ pin (RZQ : 240 ohm  $\pm$  1%)
- On Die Termination using ODT pin
- On-DIMM thermal sensor (Grade B)
- Average Refresh Period 7.8us at lower than TCASE 85°C, 3.9us at 85°C < TCASE  $\leq$  95°C
- Asynchronous Reset
- PCB : Height 1.180" (30.00mm), double sided component



### SPECIFICATIONS

CL(IDD)	11 cycles
Row Cycle Time (tRCmin)	48.125ns (min.)
Refresh to Active/Refresh Command Time (tRFCmin)	260ns (min.)
Row Active Time (tRASmin)	35ns (min.)
Maximum Operating Power	6.681 W* (per module)
UL Rating	94 V - 0
Operating Temperature	0° C to 85° C
Storage Temperature	-55° C to +100° C


\*Power will vary depending on the SDRAM and Register/PLL used.

Continued >>


**MODULE DIMENSIONS:**

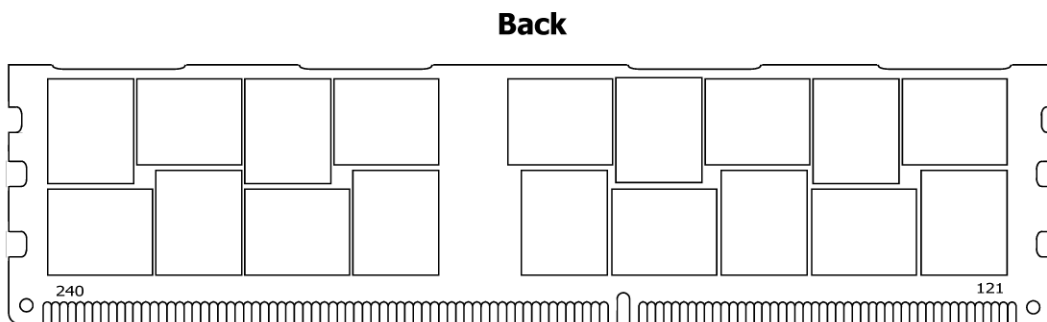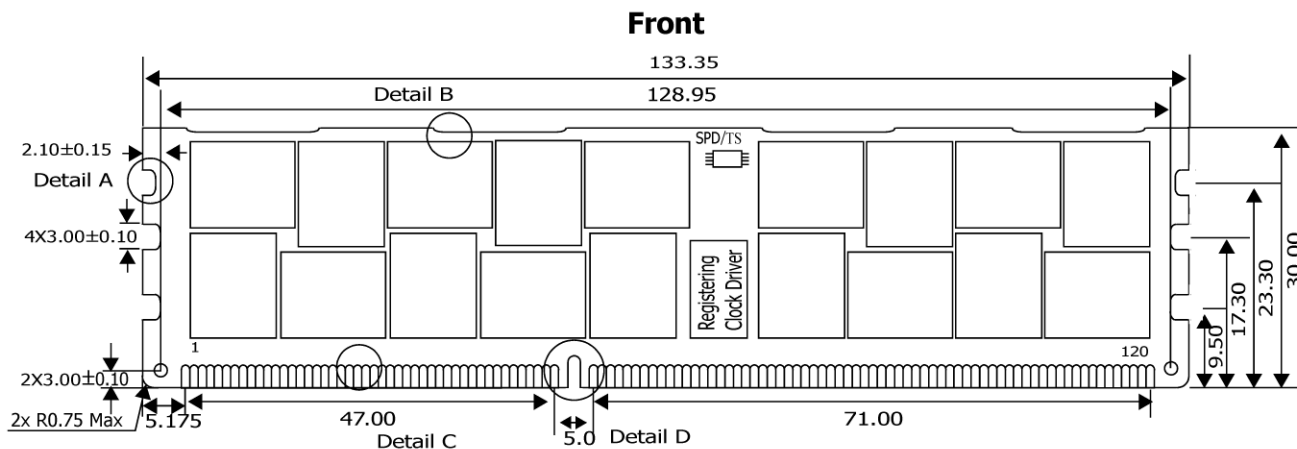


Detail of Contacts A




Detail of Contacts B




Detail of Contacts C



Detail of Contacts D



**Side**

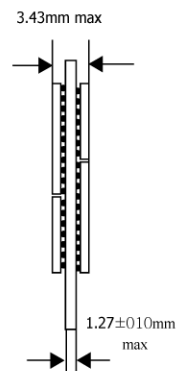


**Note:**

1. ±0.13 tolerance on all dimensions unless otherwise stated.

**Units: millimeters**

### HEAT SPREADER DIMENSIONS:

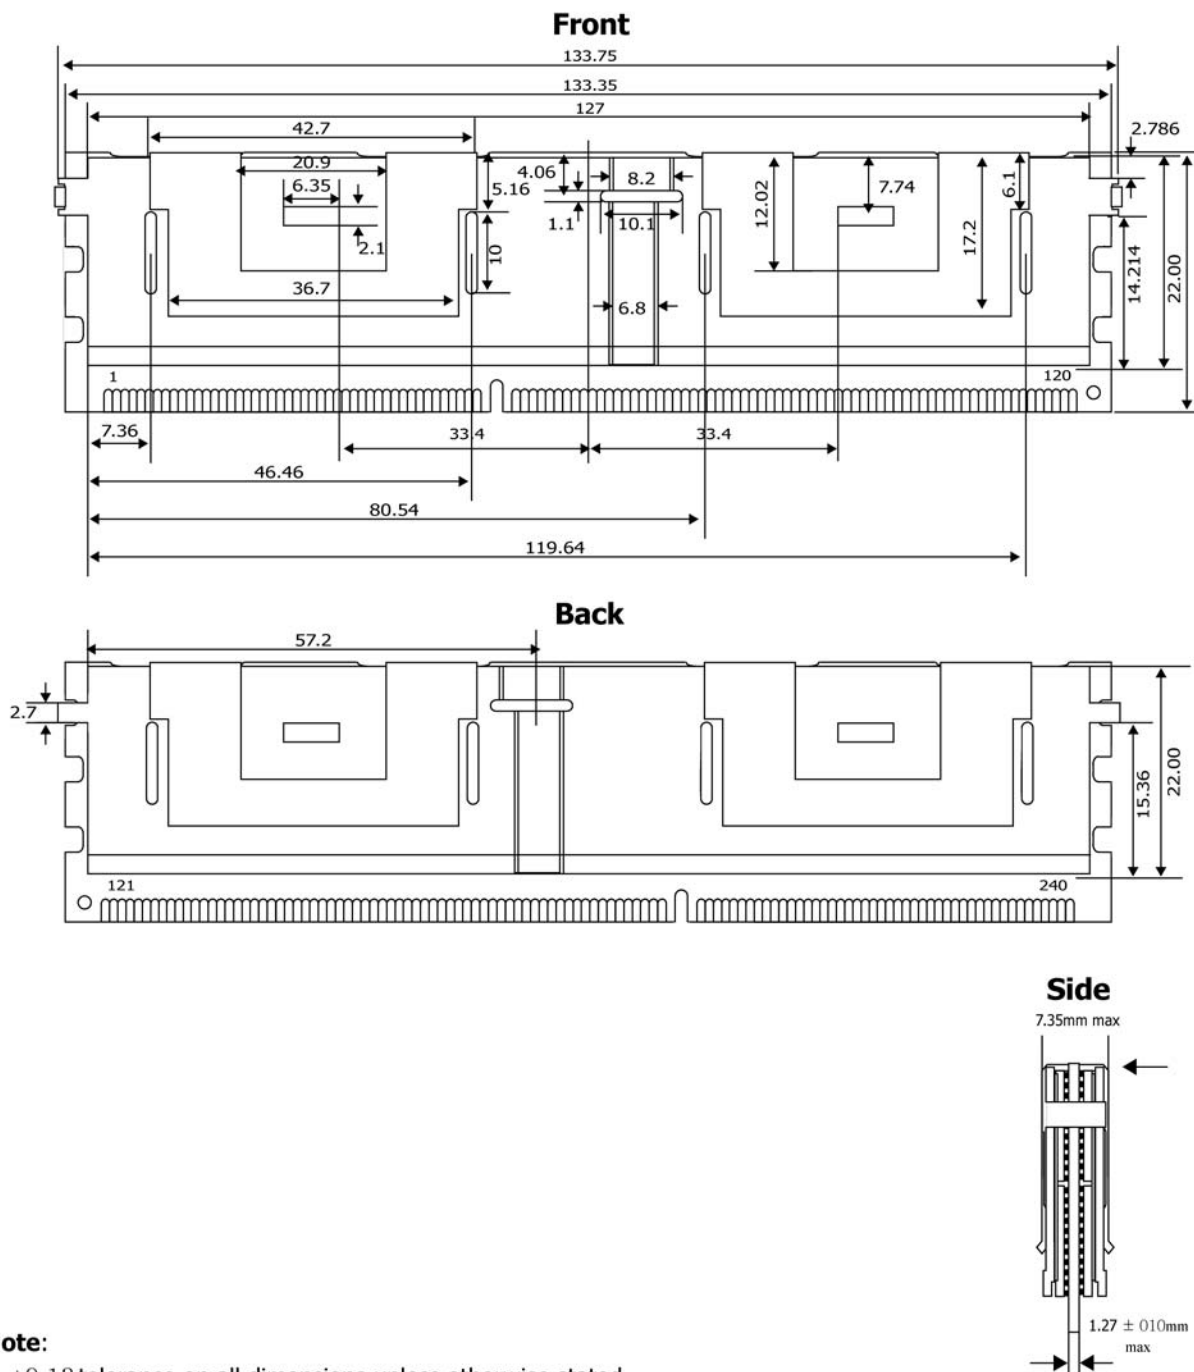

**Note:**

- 1. ±0.13 tolerance on all dimensions unless otherwise stated.
- 2. In order to uninstall FDHS, please contact sales administrator.

**Units: millimeters**

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [kingston manufacturer](#):*

Other Similar products are found below :

[SDCA3/32GB](#) [SM2280S3G2/120G](#) [04EPOP08-NL3DM627-B02U](#) [SD4/32GB](#) [SEDC400S37/960G](#) [EMMC16G-W525-X01U](#) [08EPOP04-NL3DT227-A01U](#) [SEDC1000H/1600G](#) [04EMCP04-NL2DM627-Z02U](#) [08EMCP04-NL3DT227-A01U](#) [B1621PM1WDGTKR-U](#)  
[B5116ECMDXGGB-U](#) [EMMC04G-W100-E08U](#) [SDA10/128GB](#) [D5128EETBPGGBU-U](#) [SDA3/32GB](#) [FCR-HS4](#) [D5128EC4BPGGBUI-U](#)  
[SKC400S37/1T](#) [KVR21R15D4/16](#) [SUV400S37/240G](#) [SKC400S37/512G](#)