Memory Module Specifications



KVR21SE15D8/8

8GB 2Rx8 1G x 72-Bit PC4-2133 CL15 260-Pin ECC SODIMM

DESCRIPTION

This document describes ValueRAM's 1G x 72-bit (8GB) DDR4-2133 CL15 SDRAM (Synchronous DRAM), 2Rx8, ECC, memory module, based on eighteen 512M x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-2133 timing of 15-15-15 at 1.2V. This 260-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- Power Supply: VDD=1.2V Typical
- VDDQ = 1.2V Typical
- VPP 2.5V Typical
- VDDSPD=2.2V to 3.6V
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- · Low-power auto self refresh (LPASR)
- · Data bus inversion (DBI) for data bus
- · On-die VREFDQ generation and calibration
- Dual-rank
- · On-board I2 serial presence-detect (SPD) EEPROM
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8
 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- · Fly-by topology
- · Terminated control command and address bus
- PCB: Height 1.18" (30.00mm)


SPECIFICATIONS


CL(IDD)	15 cycles
Row Cycle Time (tRCmin)	46.5ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	260ns(min.)
Row Active Time (tRASmin)	33ns(min.)
Maximum Operating Power	TBD W*
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C


^{*}Power will vary depending on the SDRAM used.


Continued >>

MODULE DIMENSIONS

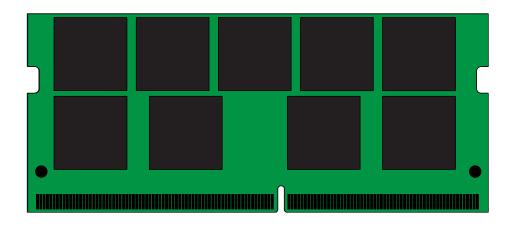

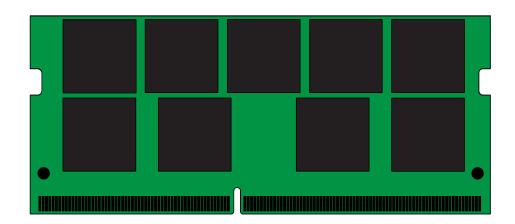

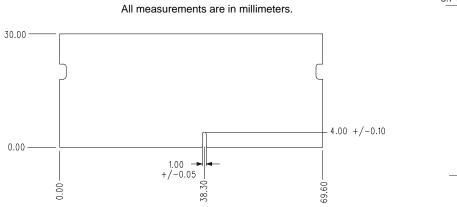



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for kingston manufacturer:

Other Similar products are found below:

SDCA3/32GB SM2280S3G2/120G 04EPOP08-NL3DM627-B02U SD4/32GB SEDC400S37/960G EMMC16G-W525-X01U 08EPOP04-NL3DT227-A01U SEDC1000H/1600G 04EMCP04-NL2DM627-Z02U 08EMCP04-NL3DT227-A01U B1621PM1WDGTKR-U B5116ECMDXGGB-U EMMC04G-W100-E08U SDA10/128GB KVR13N9S8H/4 D5128EETBPGGBU-U SDA3/32GB D5128EC4BPGGBUI-U SKC400S37/1T KVR21R15D4/16 CF/256 SUV400S37/240G SKC400S37/512G