

Memory Module Specifications

KVR800D2N6/2G

2GB 2Rx8 256M x 64-Bit DDR2-800
CL6 240-Pin DIMM

DESCRIPTION

This document describes ValueRAM's 256M x 64-bit (2GB) DDR2-800 CL6 SDRAM (Synchronous DRAM) 2Rx8 memory module, based on sixteen 128M x 8-bit FBGA components. This 240-pin DIMM uses gold contact fingers and requires +1.8V. The electrical and mechanical specifications are as follows:


SPECIFICATIONS

Clock Cycle Time (tCK)	2.5ns (min.) / 8ns (max.)
Row Cycle Time (tRCmin)	60ns (min.)
Refresh to Active/Refresh Command Time (tRFCmin)	127.5ns (min.)
Row Active Time (tRASmin)	45ns (min.) / 70,000 (max.)
Single Power Supply of	+1.8V (+/- .1V)
Power Operating	2.016 W (Approx.*)
UL Rating	94 V - 0

*Power will vary depending on the SDRAM used.

Note: The module described in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here.

Figure 1: KVR800D2N6/2G 240-Pin DIMM

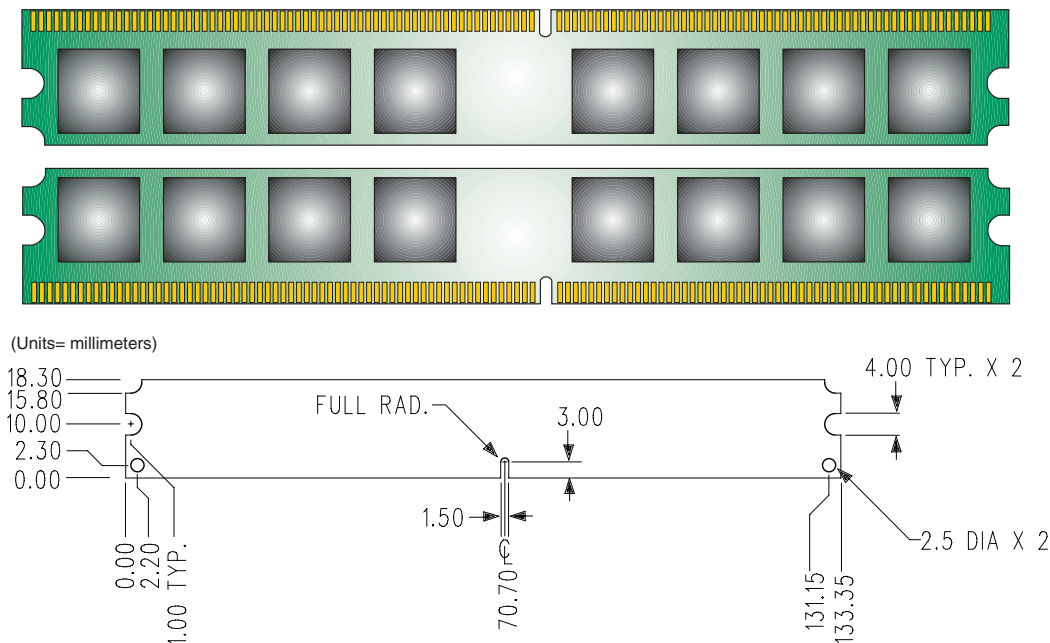

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [kingston manufacturer](#):

Other Similar products are found below :

[SDCA3/32GB](#) [SM2280S3G2/120G](#) [04EPOP08-NL3DM627-B02U](#) [SD4/32GB](#) [SEDC400S37/960G](#) [EMMC16G-W525-X01U](#) [08EPOP04-NL3DT227-A01U](#) [SEDC1000H/1600G](#) [04EMCP04-NL2DM627-Z02U](#) [08EMCP04-NL3DT227-A01U](#) [B1621PM1WDGTKR-U](#)
[B5116ECMDXGGB-U](#) [EMMC04G-W100-E08U](#) [SDA10/128GB](#) [D5128EETBPGGBU-U](#) [SDA3/32GB](#) [FCR-HS4](#) [D5128EC4BPGGBUI-U](#)
[SKC400S37/1T](#) [KVR21R15D4/16](#) [SUV400S37/240G](#) [SKC400S37/512G](#)