

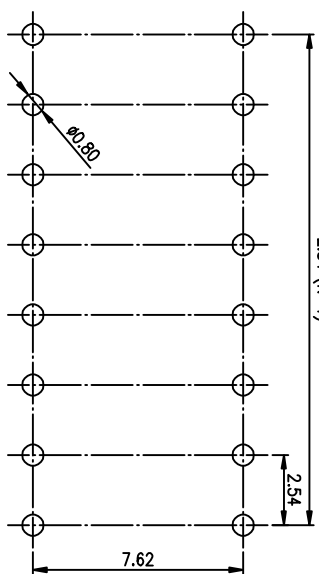

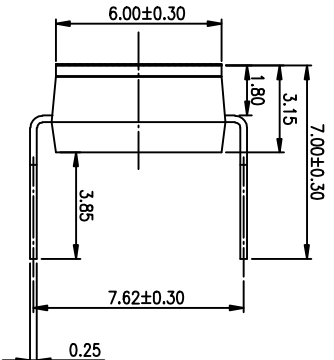
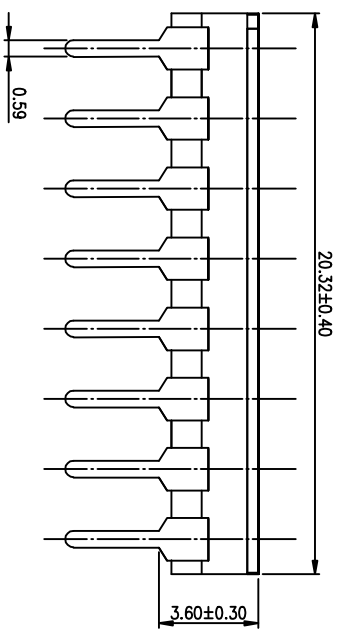
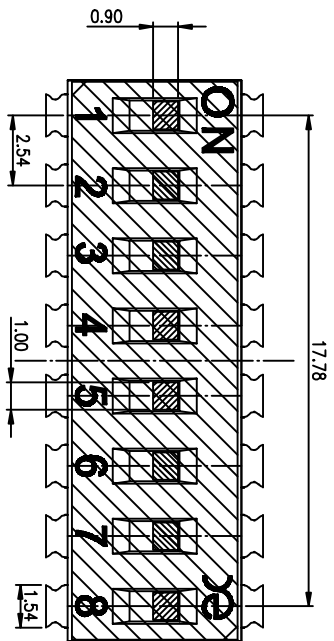


|                                   |                 |                       |
|-----------------------------------|-----------------|-----------------------|
| <b>PRODUCT NO.</b><br>DISC08THGET | <b>NO.</b><br>1 | <b>RoHS compliant</b> |
|-----------------------------------|-----------------|-----------------------|

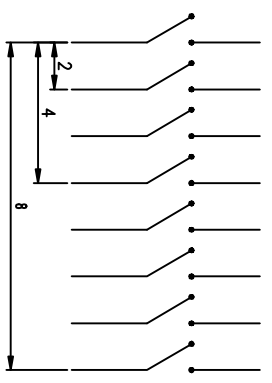


**RECOMMENDED P.C.B. LAYOUT (TOP VIEW)**

- NOTES :**
- 1.> Specification:
    - 1> Operating force: 1000gf Max
    - 2> Operating Temperature: -40° to +85°
    - 3> Storage Temperature: -40° to +85°
    - 4> Mechanical Life: 3000cycles minimum
    - 5> Electrical Life: 2000cycles 25mA 24VDC
  2. PLATING:
    - GOLD FLASH 1u"(min.) SOLDER TAIL,
    - 3u" GOLD PLATING ON THE CONTACT AREA,
    - WITH 50u" NICKEL UNDERPLATING OVERALL.
  3. PART NUMBER DESCRIPTION

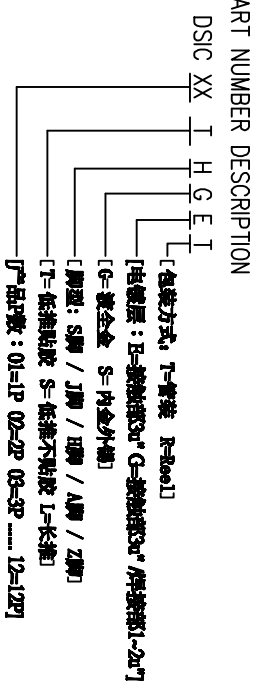

[Schematic]



(Construction)

| Number | Part Name        | Material     | Finished |
|--------|------------------|--------------|----------|
| ①      | Actuator         | UL94 VO      | White    |
| ②      | Cover            | UL94 VO      | Black    |
| ③      | Movable          | Copper Alloy | 3u"Gold  |
| ④      | Terminal         | Brass        | 1u"Gold  |
| ⑤      | Base             | UL94 VO      | Black    |
| ⑥      | Terminal Contact | Brass        | 3u"Gold  |
| ⑦      | Mylar            | UL94 VO      | 0.05mm   |

| TOLERANCE UNLESS OTHERWISE SPECIFIED |            | INSPECTION COPY |      |
|--------------------------------------|------------|-----------------|------|
| LINER                                | ANGLES     | PROJECTION      | COPY |
| 0 ± 0.25                             | 0. ± 2°    |                 |      |
| .00 ± 0.15                           | .0 ± 1°    |                 |      |
| .000 ± 0.10                          | .00 ± 0.5° |                 |      |
| DESIGN                               | kathy      | 2012/04/12      |      |
| DRAWING                              |            |                 |      |
| CHECK                                |            |                 |      |
| APPRO.                               |            |                 |      |



BY DISC SERIES PITCH 2.54mm  
PRODUCT FAMILY DISC SERIES  
PRAT NO. DISC08THGET

|          |                       |
|----------|-----------------------|
| FILE NO. | DISC08THGET-A         |
| SIZE     | UNIT SCALE SHEET REV. |
| A4       | mm 2 : 1 1 OF 1 A     |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [Kingtek Industrial](#) manufacturer:*

Other Similar products are found below :

[79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [H7CZL8AC100240](#) [DRR60016](#) [DRS4016](#) [1825008-1](#) [1825444-1](#) [200183](#) [206002](#) [219-6LPSTRF](#) [25.350.0653.0](#) [SBS 5004 TG](#) [SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [192960010](#) [206005RAS](#) [206007](#) [2-1825058-8](#) [25.330.0653.1](#) [25.352.0353.0](#) [CXDRIVEV2X](#) [IKN0600000](#) [IKN0800000](#) [LA2-002-DC24](#) [DRD10CRAE04](#) [DSR02T](#) [DSS 208 N](#) [E2FMX2D1M1TGJ03M](#) [NDI10H](#) [219-9MSTP](#) [EPM02FV](#) [206010RAST](#) [NDS08V](#) [76SB05](#) [TD06H0SK1](#) [Z7.255.9027.0](#) [1-1825058-3](#) [1825428-4](#) [219-10LPSTF](#) [E3ZG6111D03M](#) [G4D212PUSTV2DC5](#) [EPG301BT06](#) [219-7LPSTRF](#) [1-1825058-6](#) [E3TSL23M5J03M](#)