


LED strip K-HE-1920-HD-24V

Ref. K-HE-1920-HD-24V



Dimensions: Width [W]: 10 mm | Max run length [L]: 6.1 m | Cut every [C]: 50 mm | LED spacing [D]: 5.5 mm | Height [H]: 1.6 mm

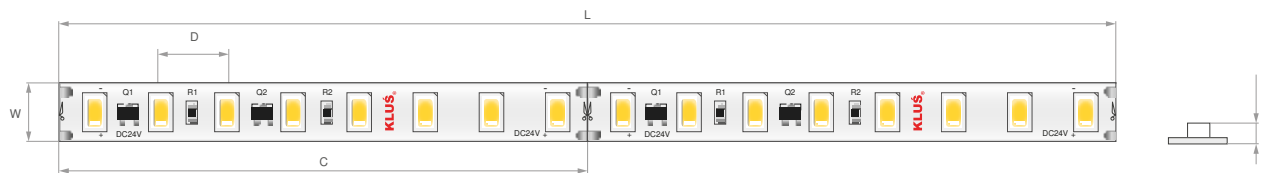

- CRI 95+ / R9 values up to 98
- Efficiency up to 134 lm|W
- Lumen output up to 2573 lm|m
- 2-Step MacAdam's ellipse, single binning
- Superior color consistency and dimming performance
- Clean line of light when paired with most KLUS extrusions and LIGER cover

TECHNICAL SPECIFICATIONS

IP protection rating	20	Color temperature	Lumen output	Efficiency	Ref
Sealing type	silicone coating	2700 K	2216 lm/m	115 lm/W	K-HE-27-1920-HD-24V
CRI	95	3000 K	2216 lm/m	115 lm/W	K-HE-30-1920-HD-24V
Only valid for white	yes	3500 K	2321 lm/m	120 lm/W	K-HE-35-1920-HD-24V
Working temperature from	-20°C	4000 K	2415 lm/m	125 lm/W	K-HE-40-1920-HD-24V
Working temperature up to	60°C	5000 K	2573 lm/m	134 lm/W	K-HE-50-1920-HD-24V
Input voltage	24 V DC				
Power consumption	19.2 W/m				
Beam angle	120°				
MacAdam's ellipse	2 SDMC				
Number of LEDs per 1 m	160				
Number of LEDs per cut section	8 pcs				
Energy consumption	20 kWh/1000h				
Does not contain mercury and lead	yes				
Dimmable	yes				
No UV IR radiation	yes				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Bars and Strips](#) category:

Click to view products by [KLUS](#) manufacturer:

Other Similar products are found below :

[LFBLL-SW823-24V-8S125-20](#) [LFBHL-SW927-24V-8S63-20](#) [RF-G30HI3510-241202081-A0 IP20](#) [RF-GW2H39W19-2406020I1-A1 IP20](#)
[HH-SX144F008W24 -2835 WW WHITE PCB IP20](#) [N004120BB1LZ \(6000K\)](#) [N004120BC1LZ \(3000K\)](#) [N008120BB1LZ \(BLUE\)](#)
[N008120BC1LZ \(4000K\)](#) [S008144CA4SA1/C1 \(RGB+4000K IP20\)](#) [S0121134ZC3PZ](#) [COB-480-CW-24-10W](#) [HQS-14.4W-60LED-RGB-](#)
[WP-12V-5M](#) [N013060CA3SA1](#) [HQS-12W-60LED-W-WP-24V-5M](#) [UQS-COB-12W-NW-24V-5M](#) [HH-SNW480F208W24-COB-R](#) [HQS-](#)
[12W-60LED-NW-WP-12V-5M](#) [S012120BC1HZ \(WARM WHITE\)](#) [HQS-6W-60LED-WW-WP-24V-5M](#) [S020240BC1DC0/C3](#)
[S012060CB4SA1/C2](#) [HQS-12W-60LED-WW-WP-24V-5M](#) [HH-SW480F008W24-COB-R](#) [UQS-COB-8W-WW-12V-5M](#) [COB-480-WW-24-](#)
[10W](#) [HQS-6W-60LED-NW-WP-12V-5M](#) [S012060CC4DC0/C3](#) [S012048CB4PZ \(RGB+W:3000K\)](#) [HQS-9.6W-120LED-NW-WP-12V-5M](#)
[S012480ZB1SF \(WARM WHITE IP20\)](#) [HQS-6W-60LED-WW-12V-5M](#) [S012120BC1HZ \(COLD WHITE\)](#) [HQS-6W-60LED-W-WP-12V-5M](#)
[HQS-6W-60LED-W-12V-5M](#) [HQS-9.6W-120LED-NW-24V-5M](#) [HQS-9.6W-120LED-NW-12V-5M](#) [HQS-12W-60LED-WW-12V-5M](#)
[S012480ZB1SF \(COLD WHITE IP20\)](#) [HH-SRGB60F310W12-5050 WHITE PCB IP65A](#) [S010120BC3SM/C1](#) [UQS-COB-12W-W-24V-5M](#)
[HH-SRGB60F010W12-5050 WHITE PCB IP20](#) [HQS-6W-60LED-NW-12V-5M](#) [HH-SW60F008W12-3528 CW WHITE PCB IP20](#) [HQS-6W-](#)
[60LED-NW-24V-5M](#) [S004060BB3PZ/C2](#) [TAMA LED K2-30-1920-24V 19,2W/M](#) [TAMA LED K-30-2400-24V 24W/M](#) [TAMA LED K-](#)
[CR40-1440-24 14,4W/M](#)