


# LED strip K2-1920-24

Ref. K2-1920-24



Dimensions: Width [W]: 14 mm | Max run length [L]: 5 m | Cut every [C]: 14.29 mm | LED spacing [D]: 7.14 mm | Height [H]: 1.8 mm

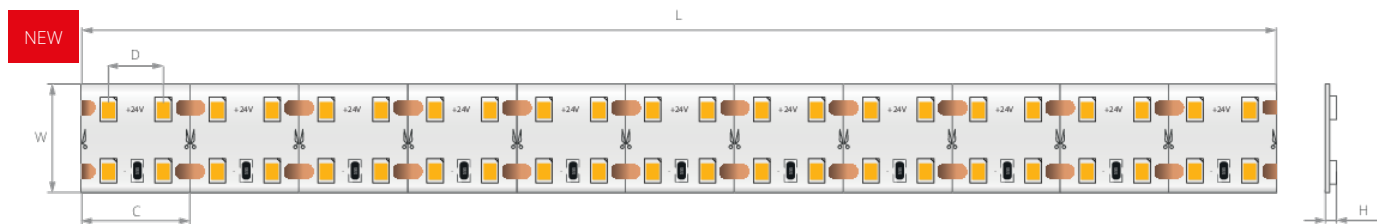

- Quick installation of the light source in the lighting fixture
- Cutting points at very short intervals and a large number of diodes
- High luminous flux 3070 lm/m with low power consumption
- High lighting efficacy
- Excellent color rendering CRI 90+ and full dimming control

## TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
LxBy	L80B50
Lifetime	60000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	19.2 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Length [L]	5000 mm
Number of LEDs per 1 m	280
Number of LEDs per cut section	4 pcs
Energy consumption	19.2 kWh/1000h
Warranty [months]	84

Color temperature	Lumen output	Efficiency	Ref
2700 K	2688 lm/m	140 lm/W	K2-27-1920-24
3000 K	2780 lm/m	144 lm/W	K2-30-1920-24
3500 K	2880 lm/m	150 lm/W	K2-35-1920-24
4000 K	3070 lm/m	159 lm/W	K2-40-1920-24
5000 K	3070 lm/m	159 lm/W	K2-50-1920-24

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Bars and Strips](#) category:*

*Click to view products by [KLUS](#) manufacturer:*

Other Similar products are found below :

[LFBLL-SW823-24V-8S125-20](#) [LFBHL-SW927-24V-8S63-20](#) [RF-G30HI3510-241202081-A0 IP20](#) [RF-GW2H39W19-2406020I1-A1 IP20](#)  
[HH-SX144F008W24 -2835 WW WHITE PCB IP20](#) [N004120BB1LZ \(6000K\)](#) [N004120BC1LZ \(3000K\)](#) [N008120BB1LZ \(BLUE\)](#)  
[N008120BC1LZ \(4000K\)](#) [S008144CA4SA1/C1 \(RGB+4000K IP20\)](#) [S0121134ZC3PZ](#) [COB-480-CW-24-10W](#) [HQS-14.4W-60LED-RGB-](#)  
[WP-12V-5M](#) [N013060CA3SA1](#) [HQS-12W-60LED-W-WP-24V-5M](#) [UQS-COB-12W-NW-24V-5M](#) [HH-SNW480F208W24-COB-R](#) [HQS-](#)  
[12W-60LED-NW-WP-12V-5M](#) [S012120BC1HZ \(WARM WHITE\)](#) [HQS-6W-60LED-WW-WP-24V-5M](#) [S020240BC1DC0/C3](#)  
[S012060CB4SA1/C2](#) [HQS-12W-60LED-WW-WP-24V-5M](#) [HH-SW480F008W24-COB-R](#) [UQS-COB-8W-WW-12V-5M](#) [COB-480-WW-24-](#)  
[10W](#) [HQS-6W-60LED-NW-WP-12V-5M](#) [S012060CC4DC0/C3](#) [S012048CB4PZ \(RGB+W:3000K\)](#) [HQS-9.6W-120LED-NW-WP-12V-5M](#)  
[S012480ZB1SF \(WARM WHITE IP20\)](#) [HQS-6W-60LED-WW-12V-5M](#) [S012120BC1HZ \(COLD WHITE\)](#) [HQS-6W-60LED-W-WP-12V-5M](#)  
[HQS-6W-60LED-W-12V-5M](#) [HQS-9.6W-120LED-NW-24V-5M](#) [HQS-9.6W-120LED-NW-12V-5M](#) [HQS-12W-60LED-WW-12V-5M](#)  
[S012480ZB1SF \(COLD WHITE IP20\)](#) [HH-SRGB60F310W12-5050 WHITE PCB IP65A](#) [S010120BC3SM/C1](#) [UQS-COB-12W-W-24V-5M](#)  
[HH-SRGB60F010W12-5050 WHITE PCB IP20](#) [HQS-6W-60LED-NW-12V-5M](#) [HH-SW60F008W12-3528 CW WHITE PCB IP20](#) [HQS-6W-](#)  
[60LED-NW-24V-5M](#) [S004060BB3PZ/C2](#) [TAMA LED K2-30-1920-24V 19,2W/M](#) [TAMA LED K-30-2400-24V 24W/M](#) [TAMA LED K-](#)  
[CR40-1440-24 14,4W/M](#)