

## Product information

# 85 51 250 AF

## Spring Hose Clamp Pliers With retainer



- Rotating, universal grip inserts for reliably gripping the clamps in all positions
- Jaw inserts can also be rotated under load
- Extremely good leverage which allows clamps to be opened easily without great effort
- Slim head design; narrow head width, rotating grip inserts make this an ideal tool, especially in confined areas
- Additional function: detach hoses gently using the serrated jaw
- The locking device enables simple and secure work on clamps under tension without effort
- One-hand release
- Can be used for standard, space-saving, spring wire hose clamps and for spring band clamps up to 70 mm nominal size
- Allows more than 40 mm clamping range
- Chrome vanadium electric steel, forged, oil-hardened



General	
Article No.	85 51 250 AF
EAN	4003773078623
Pliers	grey atramentized
Handles	with non-slip plastic coating
weight	371 g
Dimensions	250 x 50 x 19 mm


Technische Attribute	
Capacity	Ø max. 70 mm
Adjustment positions	19

Classification	
eCl@ss 5.1.4	21040301
ETIM 5.0	EC000164
ETIM 6.0	EC000164
proficl@ss 6.0	AAA936c004
UNSPSC 13.1	27112112

technical change and errors excepted



85 51 250 AF

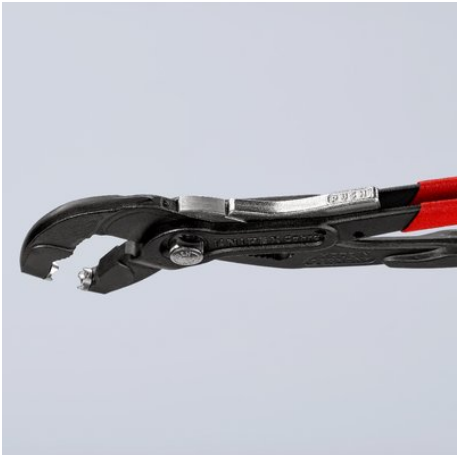

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pliers & Tweezers](#) category:*

*Click to view products by [Knipex](#) manufacturer:*

Other Similar products are found below :

[0026](#) [T0058765801](#) [80](#) [76C](#) [378MN](#) [L4VN](#) [LN54VN](#) [NN7776VN](#) [54CGVN](#) [SN55VN](#) [DRP10N](#) [0036](#) [PN 5050/21D](#) [TR 20 VM](#) [TR 25 A](#)  
[505BGC](#) [622TX](#) [43450](#) [8140 CO](#) [8150 CO](#) [8165 CO](#) [32BSA25](#) [53CSA](#) [5BSAF](#) [5FSA](#) [5MBS](#) [M4AS](#) [017610101](#) [PN 5025](#) [65516300](#) [1-](#)  
[84-199](#) [YT-2469](#) [011640100](#) [010480315](#) [503 618 3](#) [PGT435](#) [5000522](#) [011770113](#) [011770101](#) [CPE.A4](#) [T3781](#) [189A.17VE](#) [PPR 5003 D](#)  
[131 010 2](#) [40603GP](#) [011780102](#) [45705](#) [CPES](#) [6151](#) [181A.18CPE](#)