


GENERAL CATALOGUE



Pliers

MADE IN GERMANY SINCE 1882

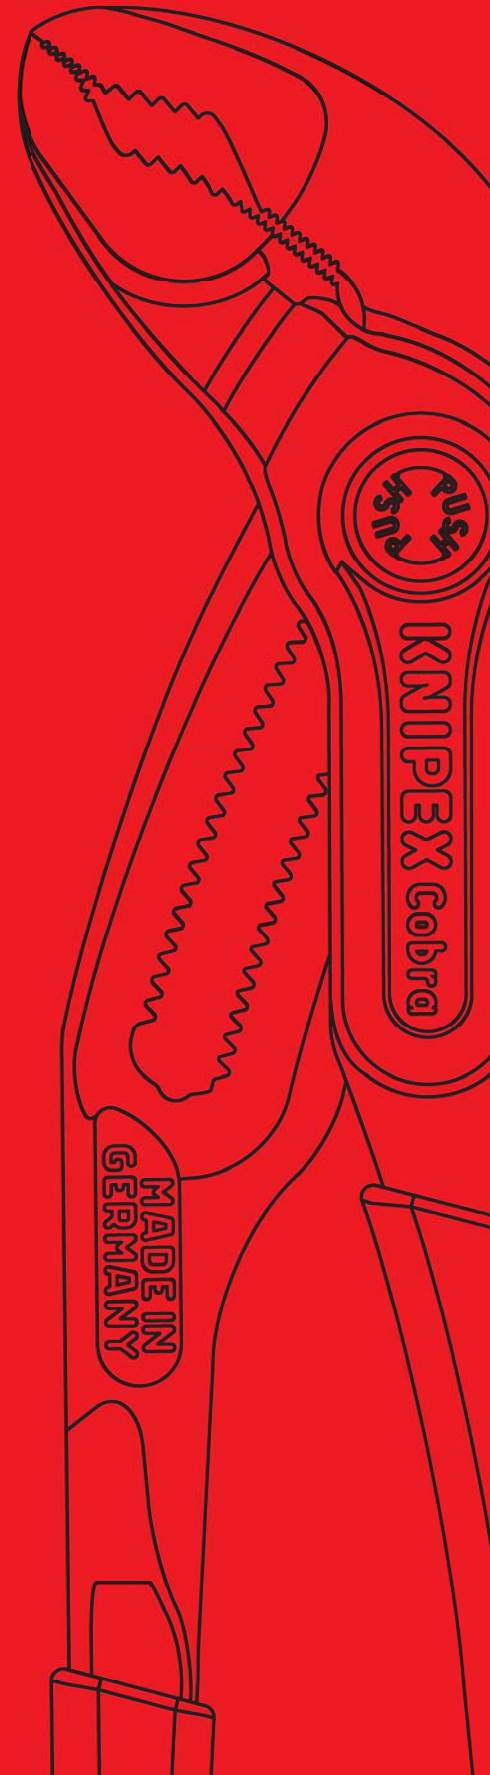

The pliers company


KNIPEX Quality – Made in Germany






KNIPEX für den Mann vom Fach

1965

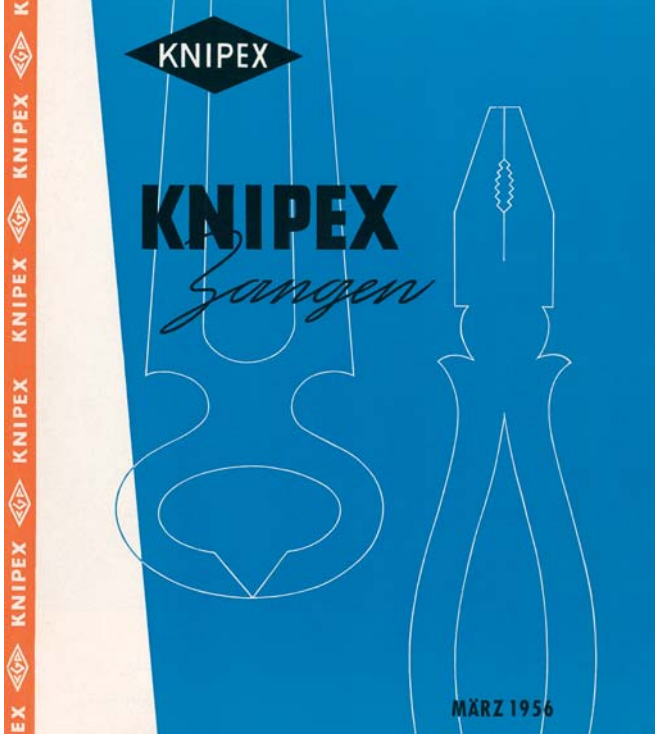


MÄRZ 1956

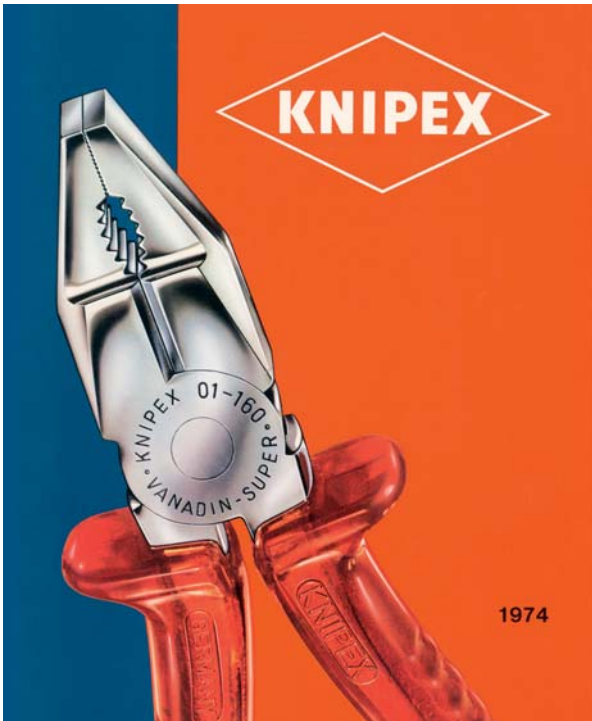

KNIPEX

1974

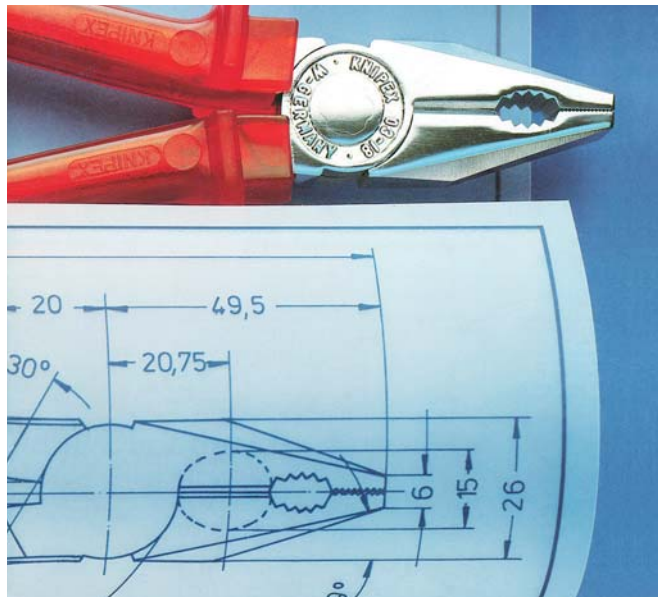


KNIPEX Pliers.
German craftsmanship
from design to production.

Catalogue 1985
2nd edition



Tarif des pinces et Tenailles
Septembre 1952

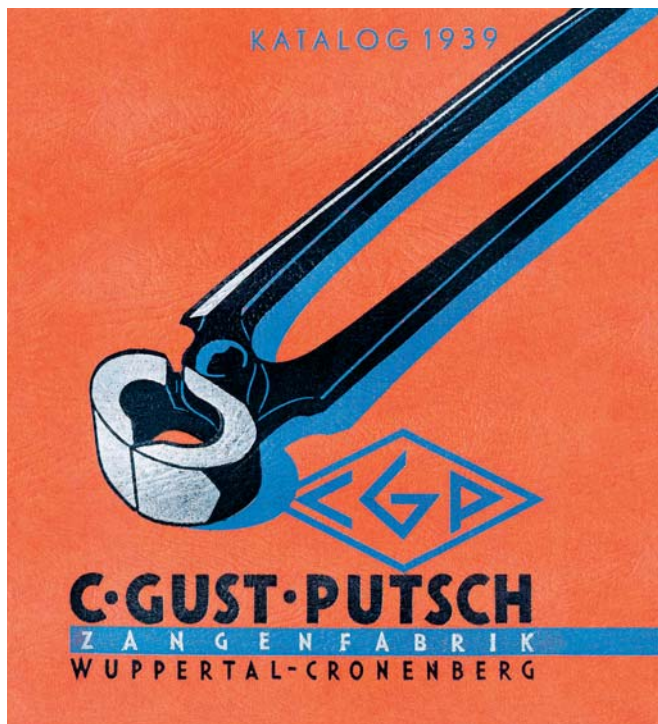

KATALOG 1939

C-GUST-PUTSCH
ZANGENFABRIK
WUPPERTAL-CRONENBERG

KNIPEX – the company behind the pliers.

For over 130 years and four generations, we have been working passionately on being the best manufacturer of pliers for our customers and users – with a clear focus, high demands and a constant flow of new ideas. Throughout the world, our brand enjoys a great deal of trust, and we aim to consistently meet and rebuild this.

Success is important to us, but is not something we look for at any price. We are guided by values, orientate our actions towards sustainability, and face up to our responsibility towards society and the natural environment in which and with which we live. We invest heavily in the efficiency of our location and the qualification of our employees, working today on the success of tomorrow and the day after that – so that we can also continue to be a strong and reliable partner in the future.

Yours, *Ralf Putsch*



Ralf Putsch, Managing Partner.

1



CoBolt® XL

2



Cobra®

3




Pliers for Electrical Installation

4



X-Cut®

5

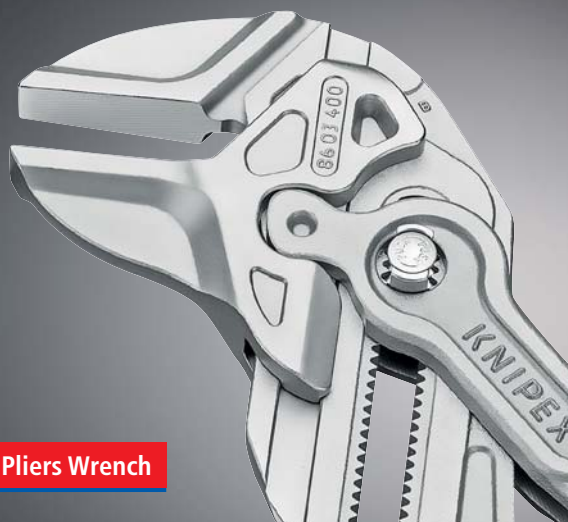

Pliers Wrench

6



TwinForce®

7



Bolt End Cutting Nippers

8



Spring Hose Clamp Pliers

KNIPEX pliers are different: ideas for more use and performance.

Ever better pliers – that is our guiding principle to which we devote all of our expertise and creativity. We are not satisfied with standard solutions, but rather continuously develop new and improved models that are better to work with and easier to use.

Working in this way means that sometimes we find unconventional solutions to situations, which then go on to set new benchmarks in the industry: novel methods of power transmission, easier and faster handling, combining various functions in a single tool and imaginative problem solvers for special applications. These save our users energy and time, giving them better work results with less effort.

In addition to major innovations, we work continuously on reworking our models in lots of small steps to improve their function, ergonomics and service life.

- 1 Compact force:** CoBolt® XL – two-hand operation for maximum cutting force.
- 2 Easy operation:** Cobra® – fast grip, precise adjustment, hold with self-locking.
- 3 Multifunctional:** electrical installation pliers – six functions in one pair of pliers.
- 4 Universal cutting force:** X-Cut® – the first high leverage diagonal cutters with box joint and precision cutting edges.
- 5 Speed and versatility:** pliers wrench – screws, holds, bends and presses without damaging materials.
- 6 High performance cutting edges:** TwinForce® – high strength thanks to unique transmission.
- 7 End cutting nippers – redefined:** bolt end cutting nippers – light, slim, cut directly on the pivot point.
- 8 Problem-solver:** spring hose clamp pliers – the only pliers for all clamps; apply safely from all angles.



Step by step: from idea to product.

A large number of steps lie between an initial idea and the finished product. We never lose sight of the fact that every new or further development must represent a noticeable improvement for the user. We deploy the most up to date technologies and processes when putting our ideas into practice.

We begin by carefully establishing the requirements and selecting the best concepts. The tool is constructed on a computer, and the function is simulated with the help of special software. This is followed by the first models made on a 3D printer and by milling and extensive tests on steel prototypes – naturally in close dialogue with experienced users. The first products manufactured using series production processes are subjected to further extensive tests – under conditions far more stringent than normal load.



The locking mechanism on the spring hose clamp pliers permit simple and safe work, even with closed clamps. Modern CAD technology simulates the mechanism on the screen.

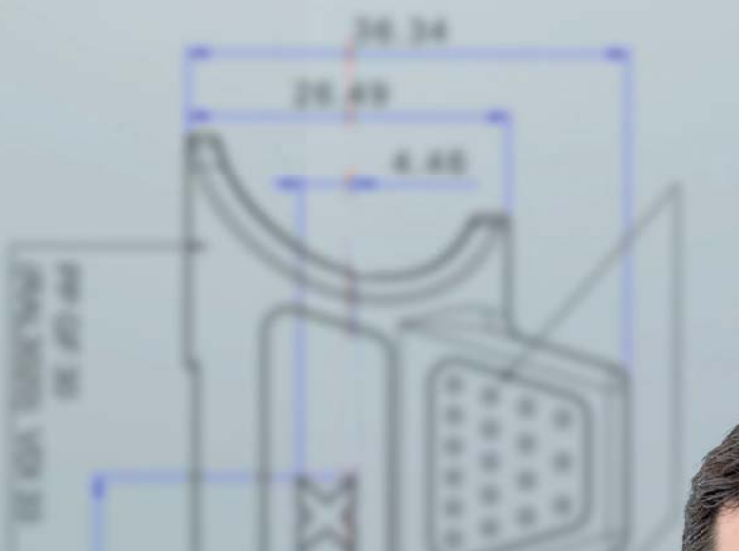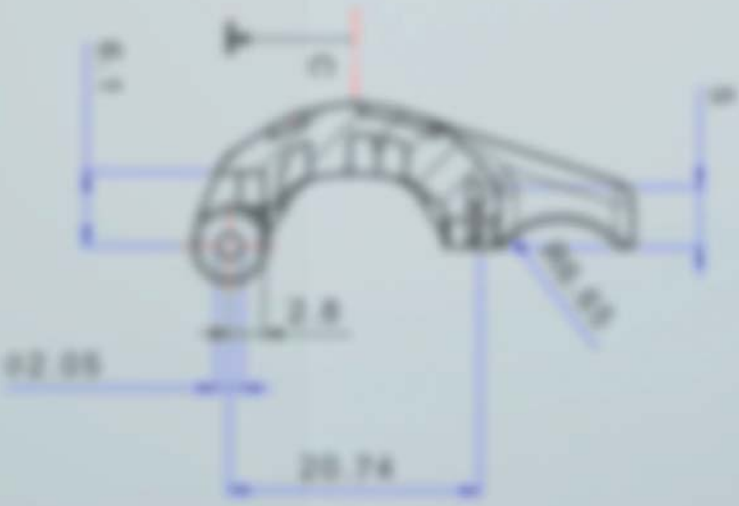


Filip Marovic, project manager for KNIPEX Product Development – “It can be seen repeatedly during the development cycles how important even the smallest detail can be. This is the very thing that motivates me to find creative new solutions. During the process we also take new technical possibilities in processing technology and materials into consideration.”




Core qualities: steel – and what we make from it.

You can expect a great deal more from a pair of KNIPEX pliers. This starts with the material. Because the many models of pliers in our range are designed for different requirements and loads, we use steel alloys that have been specially selected for the application and rolled according to our high specifications. Long lasting cutting capability when working with very hard wires, strength when working with high torque loads, and good resistance to corrosion are examples of these targets.

The respective materials are then given their specific molecular structure in a number of coordinated heat treatment steps to produce the optimal relationship between hardness and toughness. These processes allow us to achieve the high degree of reliability, durability and service life that are the very definition of KNIPEX pliers.

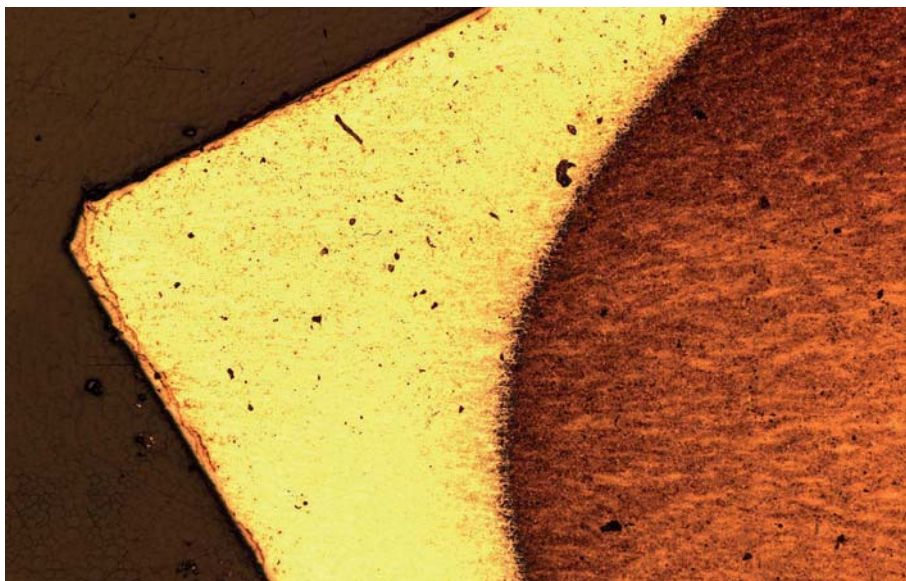

Macro image of a cutter after induction hardening. The specially hardened cutter area (light) is in sharp contrast to the softer structure of the body of the pliers (dark).

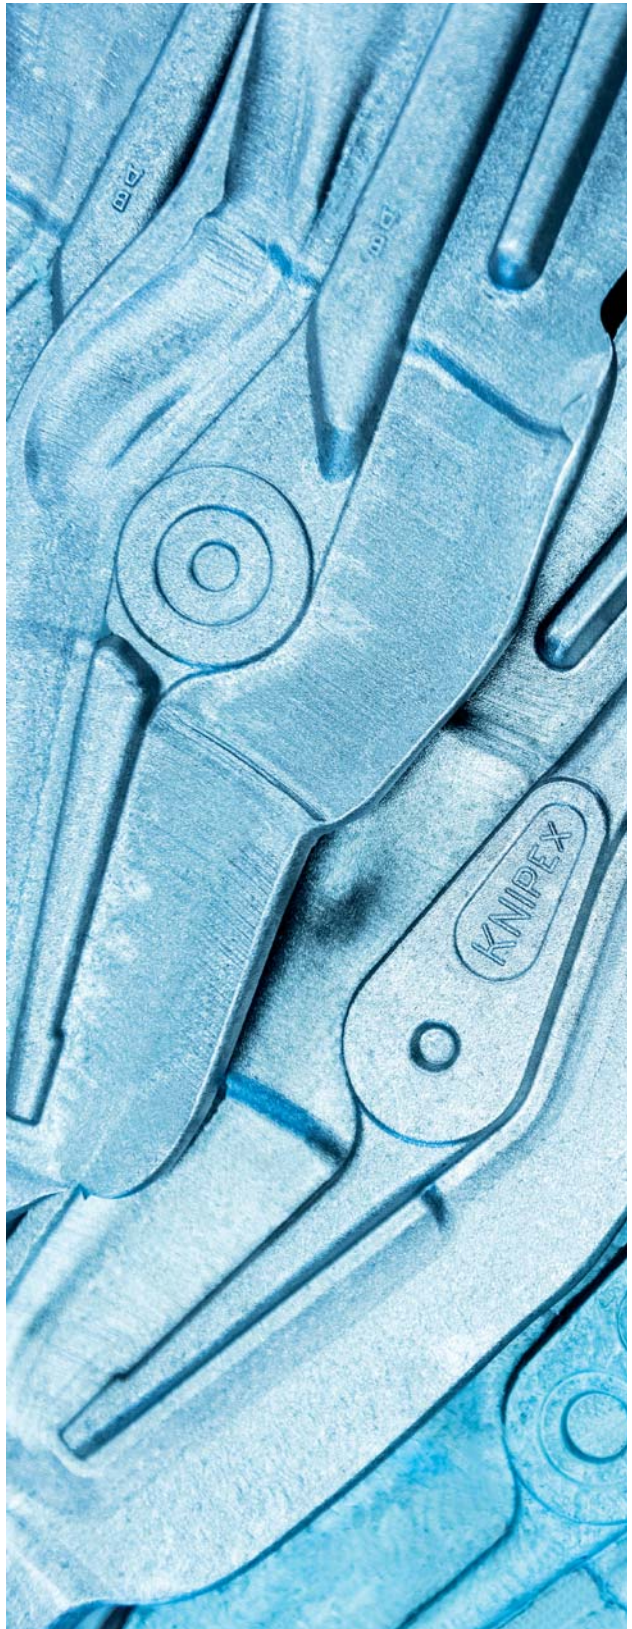

Handles of the "Alligator®
water pump pliers" being
forged under the hydraulic
double-acting hammer.



This is how our pliers are given their shape: hot and under high pressure.

Forging as a forming process is an old cultural technique and continues to hold fascination today. With an impact of up to five tonnes, the yellow glowing piece of steel is pounded in the upper and lower die at a temperature of 1,250°C. This gives it its basic shape and simultaneously a well-compacted structure.

The production of the forging die in our toolmaking works requires a great deal of experience and high precision, as this raw component will be crucial to the subsequent quality of the pliers. The contours of the forged component are milled at processing centres in the hardened and high strength die block.




Forging die for the high leverage diagonal cutters with forged-in axle.

The technology behind the pliers: machines made by KNIPEX.


All tools can only be as good as the production technology used to manufacture them. In other words, there can be no superior products without advances in production processes.

Due to our specialisation, we can focus on the technologies needed to produce high quality pliers efficiently. We have more than 400 machines, built with the specialised knowledge of generations. We build many of the machines ourselves or adapt machines precisely to our high standards using components we have manufactured. We even programme the software for the control and operation of the machinery ourselves in many cases.

From the product idea to the despatch of the finished pliers to our customers: everything is done under one roof. In this way we can directly influence all steps of value creation ourselves in terms of quality and efficiency, and make continuous improvements. Short paths and direct dialogue simplify coordination of processes and communication between employees.

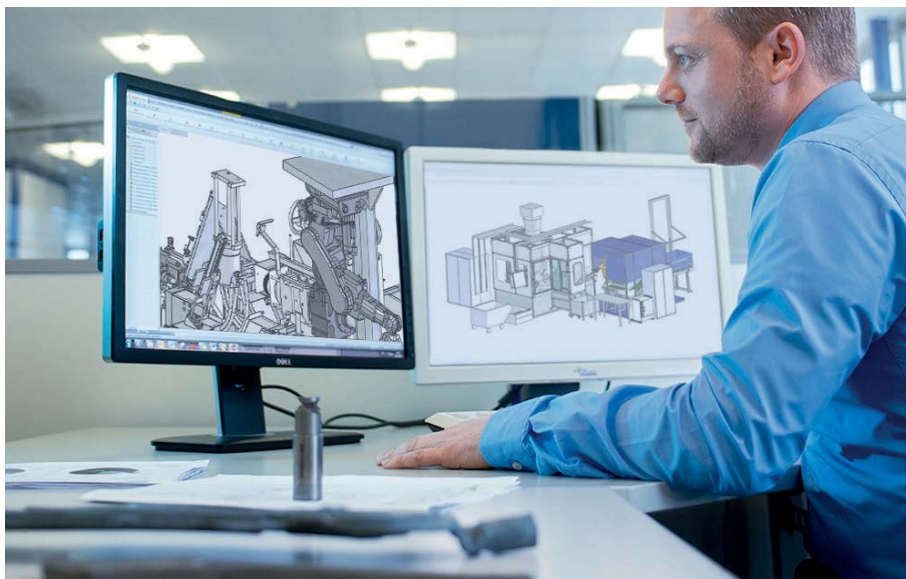

We ensure our high standards by developing our own processes and machinery.

A wide-angle photograph of a modern industrial factory floor. In the foreground, a female worker in a dark blue uniform is focused on adjusting a control panel on a large orange robotic arm. The background is filled with complex machinery, conveyor belts, and structural beams, creating a sense of a busy, highly automated manufacturing environment. The lighting is bright and even, highlighting the metallic surfaces and the organized layout of the production area.

Efficiently coordinated
processes and machinery.

Over 45,000 pairs
of different models of
pliers leave our factory
every day.

Only after several test cuts, does a pair of KNIPEX cutting pliers leave our factory.



We take it very literally: 100% reliability.

The precision of pliers is essential for their function: without accuracy there can be no reliable cutting, gripping and shaping, and also no zero backlash. The tight tolerances, which we make sure are complied with through the use of modern production technology, enable us to meet our stringent quality specifications.

We ensure compliance through strict measurements and diverse inspections – both after the various production steps and at the end of the entire process. To do this we use the most up-to-date measurement technology and endurance test plants – as well as the practical component test by hand.



Shape and roughness of the diagonal cutter's cutting edge are precisely measured with an optical 3D measuring system.


More than excellent pliers: what else you can expect from us.

Quality does not stop with the product. Trust, reliability and a collaborative approach define our business relationships – with consistent customer orientation, good service and competent field staff. We provide advice and training, and supply you with extensive digital product data whose format we adapt to your specific requirements. Added to this are diverse possibilities for sales support.

You will not find the breadth and depth of our range with any other manufacturer worldwide – so that your customers can always find the tool they are looking for.



We also present the breadth and depth of our range at in-house exhibitions and open days.

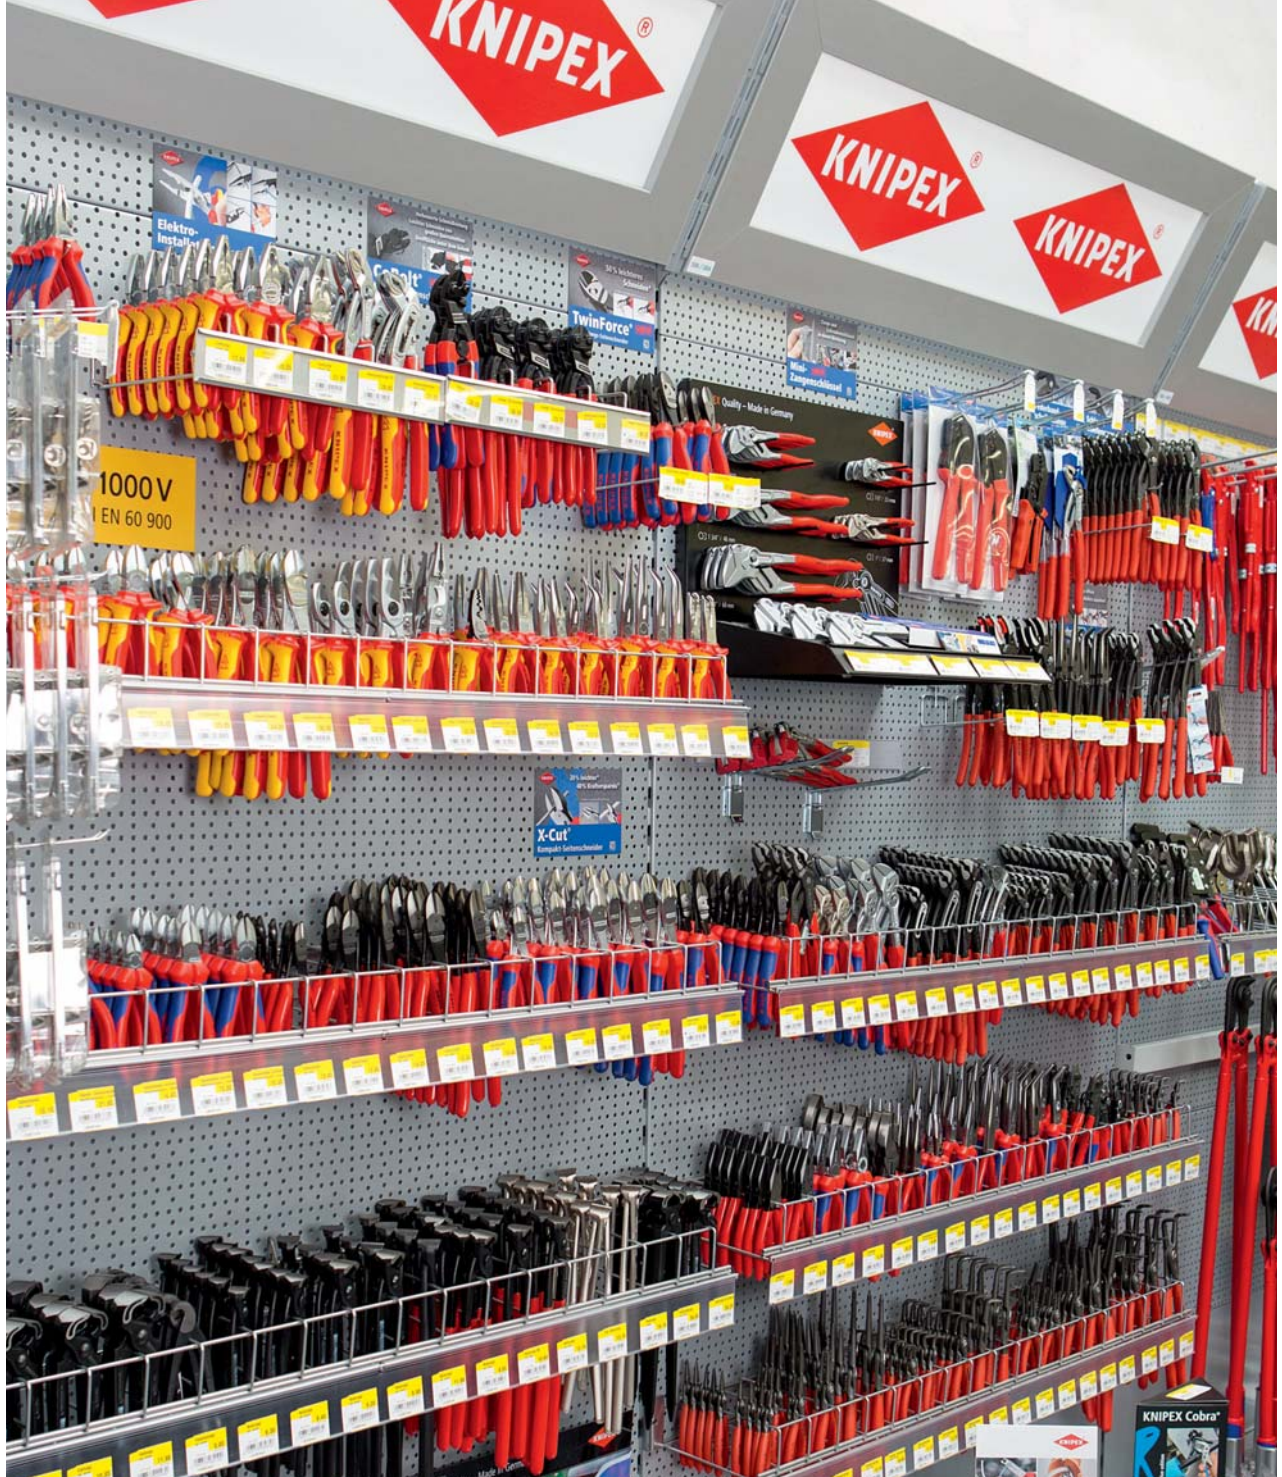




At home in the world: locations in more than 100 countries for you.

KNIPEX is the global pliers brand. We are present in all continents, with a dense network of customers, representatives and branches. In order to be closer still to our retailers and be able to give them even better support, we are further extending our international activities all the time.

There is no substitute for direct contact, which is why we are there for you personally at more than 100 trade fairs each year. On platforms and with the help of the most varied media – classic and digital – we provide comprehensive information about our range and application opportunities in over 30 languages. We reach users and fans throughout the whole world via social media and hundreds of KNIPEX online videos.

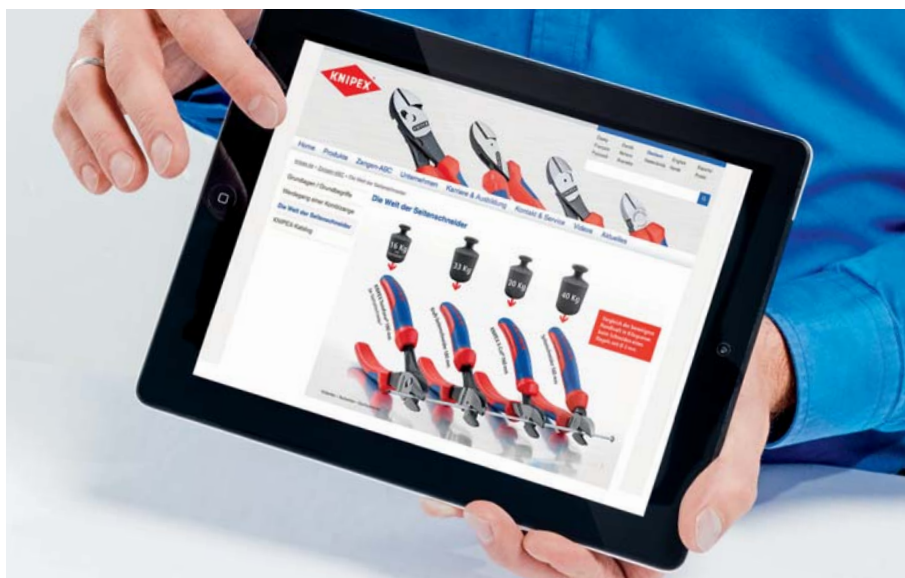

We make up to date information available digitally in several languages on all usual channels.

The key factor: our employees.

The most important basis of our success is our employees. Their knowledge and skills, their dedication and their ideas are crucial to our efficiency and thus to our future.

As a company, we are a social community. We want to shape our culture in such a way that allows our employees to participate and identify through their work but also as individuals. We create good conditions for our employees to develop their potential, to obtain further qualifications and to stay healthy. It is also important to us that our employees are able to successfully balance family and career

We invest a significant amount of both expense and care in the training of young people, but also impart a wide spectrum of professional and personal skills to other employees.



Our junior staff obtain their qualifications in our own modern training workshop.





Acting responsibly – sustainable management.



As a company, we believe we share responsibility for our natural environment and the well-being of society. We interact with both in various ways. We consume resources, but take care to use them as carefully as possible, and want to make a contribution to ensuring that they are available to future generations in the same or where possible a better form.

Our ecological objectives include a continuous reduction in our energy consumption, reduction in the volumes of waste and caring for the biodiversity at our site. In addition, we participate in major climate protection projects.













Companies should also be good citizens. We support numerous institutions and organisations from the areas of education and culture. We maintain a close exchange with schools and universities, and strengthen civic engagement in our region in diverse ways.



We support the Bergische music school in the “Singpause” project which, with the help of specially trained teachers, communicates the foundations of music and pleasure at singing together in schools.

At a glance


Overview of products

| | | |
|------------|--|---|
| 26 | Combination and Multifunctional Pliers Combination Pliers Pliers for Installation Round Nose and Flat Nose Pliers |  |
| 40 | Wire Strippers and Dismantling Tools Insulation Strippers with adapted blades MultiStrip 10 Dismantling Tools |  |
| 58 | Gripping and Grip Pliers Flat Nose Pliers Round Nose Pliers Grip Pliers |  |
| 70 | Circlip Pliers Circlip Pliers Precision Circlip Pliers Circlip Pliers Sets |  |
| 84 | Carpenters' Pincers and Concreters' Nippers Carpenters' Pincers Concreter's Nippers High Leverage Concreters' Nippers |  |
| 90 | Cutting Pliers Diagonal Cutters Bolt Cutters End Cutting Nippers |  |
| 110 | Pipe Wrenches and Water Pump Pliers Pliers Wrenches Cobra® Alligator® Pipe Wrenches |  |
| 130 | Special Pliers and Control Cabinet Keys Pipe Cutters Spring Hose Clamp Pliers Magnetic LED Lamp Control Cabinet Keys |  |
| 152 | Cable and Wire Rope Shears Cable Shears Cable Cutters with ratchet action Wire Rope Shears |  |
| 164 | Crimping Pliers and Crimp Assortments Crimp System Pliers PreciForce® Cable Connectors |  |
| 192 | Insulated Tools Pliers Wrenches Screwdrivers Sets |  |
| 232 | Electronics Pliers and Precision Tweezers Cutting Pliers Gripping Pliers Precision Tweezers |  |
| 254 | Pliers with tether attachment point for mounting a fall protection |  |
| 258 | Tool Assortments and Tool Cases Pliers Sets Tool Bags Tool Cases |  |
| 274 | Index / Article Number Index Pliers-ABC | |

Combination and
Multifunctional Pliers



| | |
|--|----|
| Combination Pliers | 28 |
| High Leverage Combination Pliers | 29 |
| Needle-Nose Combination Pliers | 30 |
| Mini Combination Pliers | 32 |
| “Lineman’s Pliers” | 33 |
| Pliers for Electrical Installation | 34 |
| Electricians’ Pliers | 36 |
| Round Nose Pliers with cutting edge (Jewellers’ Pliers) | 37 |
| Flat Nose Pliers with cutting edges (Precision Mechanics Pliers) | 37 |
| Snipe Nose Pliers with centre cutter (Telephone Pliers) | 37 |
| Snipe Nose Side Cutting Pliers (Radio Pliers) | 38 |
| Snipe Nose Side Cutting Pliers (Stork Beak Pliers) | 39 |

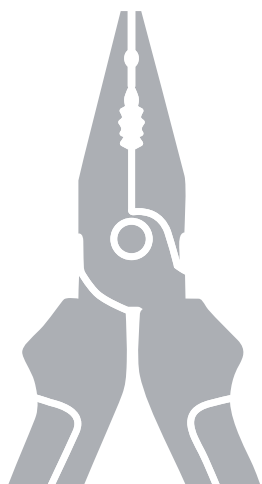


Combination Pliers

DIN ISO 5746

03

- > with gripping zones for flat and round material, suitable for versatile use
- > with cutting edges for soft and hard wire
- > long cutting edges for thicker cables
- > cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > Special tool steel, forged, multi stage oil-hardened

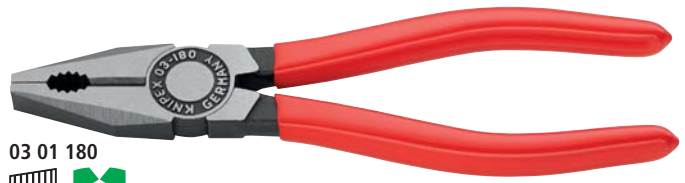

| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Cutting capacities | | | | | |
|-------------|-----------------|---------|--------|--------------------|----------|---|------|------|-----------------|----|-----|
| | | | | | | Ø mm | Ø mm | Ø mm | mm ² | g | |
| 03 01 140 | 015192 | 140 | | black atramentized | polished | plastic coated | 2.8 | 1.8 | 9.0 | 10 | 112 |
| 03 01 160 | 013235 | 160 | | | | | 3.1 | 2.0 | 10.0 | 16 | 187 |
| 03 01 180 | 013242 | 180 | | | | | 3.4 | 2.2 | 12.0 | 16 | 216 |
| 03 01 200 | 013259 | 200 | | | | | 3.8 | 2.5 | 13.0 | 16 | 276 |
| 03 01 250 | 015222 | 250 | | | | | 3.8 | 2.5 | 15.0 | 25 | 489 |
| 03 02 160 | 023203 | 160 | | black atramentized | polished | with multi-component grips | 3.1 | 2.0 | 10.0 | 16 | 223 |
| 03 02 180 | 023197 | 180 | | | | | 3.4 | 2.2 | 12.0 | 16 | 254 |
| 03 02 200 | 034940 | 200 | | | | | 3.8 | 2.5 | 13.0 | 16 | 322 |
| 03 05 140 | 039730 | 140 | | chrome plated | | with multi-component grips | 2.8 | 1.8 | 9.0 | 10 | 139 |
| 03 05 160 | 039518 | 160 | | | | | 3.1 | 2.0 | 10.0 | 16 | 222 |
| 03 05 180 | 034933 | 180 | | | | | 3.4 | 2.2 | 12.0 | 16 | 254 |
| 03 05 200 | 041146 | 200 | | | | | 3.8 | 2.5 | 13.0 | 16 | 324 |
| 03 06 160 | 021902 | 160 | | chrome plated | | insulate with multi-component grips, VDE-tested | 3.1 | 2.0 | 10.0 | 16 | 228 |
| 03 06 180 | 021926 | 180 | | | | | 3.4 | 2.2 | 12.0 | 16 | 264 |
| 03 06 200 | 033776 | 200 | | | | | 3.8 | 2.5 | 13.0 | 16 | 326 |
| 03 07 160 | 015307 | 160 | | chrome plated | | with dipped insulation, VDE-tested | 3.1 | 2.0 | 10.0 | 16 | 254 |
| 03 07 180 | 015314 | 180 | | | | | 3.4 | 2.2 | 12.0 | 16 | 285 |
| 03 07 200 | 015321 | 200 | | | | | 3.8 | 2.5 | 13.0 | 16 | 339 |
| 03 07 250 | 015345 | 250 | | | | | 3.8 | 2.5 | 15.0 | 25 | 597 |

High Leverage Combination Pliers

DIN ISO 5746

02

35 % less effort required than with conventional combination pliers

With cutting edges (hardness approx. 63 HRC) for heavy duty

- > easier work due to optimised leverage
- > easier cutting, powerful gripping, bending and pulling
- > long cutting edges for thicker cables
- > with gripping zones for flat and round material, suitable for versatile use
- > High-grade special tool steel, forged, multi stage oil-hardened

02 02 225 T*

pliers with tether attachment point for mounting a fall protection



02 01 180



02 02 180



02 02 225 T



02 05 180



02 06 180



02 07 225



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | | | g |
|-------------|-----------------|---------|--|----------------|----------|---|--------------------|------|------|-----------------|-----|
| | | | | | | | Ø mm | Ø mm | Ø mm | mm ² | |
| 02 01 180 | 033134 | 180 | | | | | 2.5 | 2.0 | 11.5 | 16 | 202 |
| 02 01 200 | 039679 | 200 | | black anodized | polished | plastic coated | 2.8 | 2.2 | 13.0 | 25 | 298 |
| 02 01 225 | 013198 | 225 | | | | | 3.0 | 2.5 | 14.0 | 25 | 358 |
| 02 02 180 | 034896 | 180 | | | | | 2.5 | 2.0 | 11.5 | 16 | 240 |
| 02 02 200 | 034902 | 200 | | | | with multi-component grips | 2.8 | 2.2 | 13.0 | 25 | 342 |
| 02 02 225 | 043379 | 225 | | black anodized | polished | | 3.0 | 2.5 | 14.0 | 25 | 409 |
| 02 02 225 T | 079934 | 225 | | | | with multi-component grips and integrated tether attachment point | 3.0 | 2.5 | 14.0 | 25 | 413 |
| 02 05 180 | 043072 | 180 | | | | | 2.5 | 2.0 | 11.5 | 16 | 238 |
| 02 05 200 | 043089 | 200 | | chrome plated | | with multi-component grips | 2.8 | 2.2 | 13.0 | 25 | 342 |
| 02 05 225 | 010005 | 225 | | | | | 3.0 | 2.5 | 14.0 | 25 | 400 |
| 02 06 180 | 010012 | 180 | | | | | 2.5 | 2.0 | 11.5 | 16 | 247 |
| 02 06 200 | 010029 | 200 | | chrome plated | | insulate with multi-component grips, VDE-tested | 2.8 | 2.2 | 13.0 | 25 | 343 |
| 02 06 225 | 010036 | 225 | | | | | 3.0 | 2.5 | 14.0 | 25 | 401 |
| 02 07 200 | 022299 | 200 | | chrome plated | | with dipped insulation, VDE-tested | 2.8 | 2.2 | 13.0 | 25 | 380 |
| 02 07 225 | 022305 | 225 | | | | | 3.0 | 2.5 | 14.0 | 25 | 486 |

* Other tools with tethering can be found from page 254 ff



Needle-Nose Combination Pliers

DIN ISO 5746

08

Small High Leverage Combination Pliers with pointed jaw. For all common installation and repair work.

Handy use when working in confined areas thanks to slim head design and pointed jaws (anti-twist)

Gripping surfaces with special convex contour on one side for secure gripping of flat parts

Milled groove in the gripping area permits small parts such as nails, pins and bolts to be held and pulled


- > the reliable and diverse combination pliers when out and about
- > easy cutting thanks to the high leverage joint
- > with cutting edges for soft, medium-hard and hard wire
- > long service life and stable tips
- > High-grade special tool steel, forged, multi stage oil-hardened

08 22 145 T*


pliers with tether attachment point for mounting a fall protection



Milled groove in the gripping area



Firm grip also on flat material due to three-point rest



Easy cutting thanks to the high leverage joint



Tips remain dimensionally stable also in case of major torsional forces

Product video



08 21 145



08 22 145



08 22 145 T



08 25 145



08 26 145



| Article No. | EAN | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | | | |
|-------------|--------|------|--|--------------------|----------|---|--------------------|------|------|-----------------|-----|
| | | | | | | | Ø mm | Ø mm | Ø mm | mm ² | g |
| 08 21 145 | 078951 | 145 | | black atramentized | polished | plastic coated | 3.0 | 2.0 | 8.0 | 16 | 116 |
| 08 22 145 | 078968 | 145 | | black atramentized | polished | with multi-component grips | 3.0 | 2.0 | 8.0 | 16 | 148 |
| 08 22 145 T | 080640 | 145 | | black atramentized | polished | with multi-component grips and integrated tether attachment point | 3.0 | 2.0 | 8.0 | 16 | 152 |
| 08 25 145 | 078975 | 145 | | chrome plated | | with multi-component grips | 3.0 | 2.0 | 8.0 | 16 | 148 |
| 08 26 145 | 079361 | 145 | | chrome plated | | insulate with multi-component grips, VDE-tested | 3.0 | 2.0 | 8.0 | 16 | 154 |

* Other tools with tethering can be found from page 254 ff

Combination Pliers

Chrome Vanadium

DIN ISO 5746 IEC 60900 DIN EN 60900

01

- > for heaviest duty
- > with gripping zones for flat and round material, suitable for versatile use
- > with cutting edges for soft, hard and piano wire
- > long cutting edges for thicker cables
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > particularly wear resistant gripping jaws; hardness of the gripping jaws approx. 53 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



01 06 190



| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Cutting capacities | | | | |
|-------------|-----------------|---------|---------------|--------------------------------------|--------------------|------|------|-----------------|-----|
| | | | | | Ø mm | Ø mm | Ø mm | mm ² | g |
| 01 06 160 | 040729 | 160 | chrome plated | insulated with multi-component grips | 2.0 | 1.5 | 10.0 | 16 | 201 |
| 01 06 190 | 040415 | 190 | | | 2.5 | 2.0 | 13.0 | 25 | 320 |

Mini Combination Pliers

08

- > compact combination pliers for professionals and hobbyists
- > with gripping zones for flat and round material, suitable for versatile use
- > with cutting edges for soft and hard wire
- > cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > Vanadium steel, forged, multi stage oil-hardened



08 05 110



| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Cutting capacities | | | | |
|-------------|-----------------|---------|---------------|----------------------------|--------------------|------|------|-----------------|----|
| | | | | | Ø mm | Ø mm | Ø mm | mm ² | g |
| 08 05 110 | 034957 | 110 | chrome plated | with multi-component grips | 2.5 | 1.6 | 9.0 | 10 | 85 |



Lineman's Pliers

DIN ISO 5746 ASME B107.20

09

American style

High transmission ratio for easy cutting

Requires 50 % less effort compared with conventional combination pliers due to an optimised transmission ratio


- > solid construction for heaviest strain; universally applicable
- > ergonomically optimised handle shape for firm contact to the hand and fatigue reducing operation
- > particularly effective cross-hatched knurled gripping zone in the jaws – for strong gripping and pulling
- > additional gripping zone below the joint for powerful leverage and pressing performance
- > with cutting edges for soft and hard wire
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Vanadium steel, forged, multi stage oil-hardened

09 11 240 / 09 12 240 / 09 12 240 T*

with fish tape puller in the joint gap; with universal mandrel crimping point below the joint

09 02 240 T / 09 12 240 T*


pliers with tether attachment point for mounting a fall protection

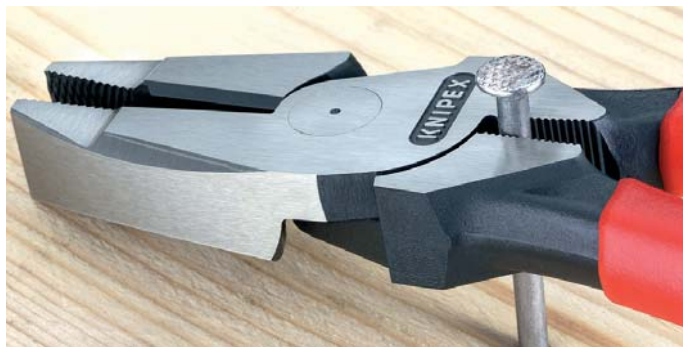

Gripping zone below the joint for powerful leverage




Cross-hatched, knurled gripping zone for firm gripping and pulling, e. g. for fence construction



Long cutting edges for cutting flat cables



09 11/12 240: universal mandrel crimping area below the joint



09 11/12 240: fish tape puller in the joint gap



09 01 240



09 02 240



09 02 240 T



09 11 240



09 12 240 T



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | ⚖ g |
|-------------|-----------------|---------|--|--------------------|----------|---|--------------------|------|--------|
| | | | | | | | Ø mm | Ø mm | |
| 09 01 240 | 064992 | 240 | | black atramentized | polished | with non-slip plastic coating | 4.6 | 3.0 | 435 |
| 09 02 240 | 065005 | 240 | | black atramentized | polished | with multi-component grips | 4.6 | 3.0 | 470 |
| 09 02 240 T | 079941 | 240 | | black atramentized | polished | with multi-component grips and integrated tether attachment point | 4.6 | 3.0 | 474 |
| 09 11 240 | 071952 | 240 | | black atramentized | polished | with non-slip plastic coating | 4.6 | 3.0 | 435 |
| 09 12 240 | 071969 | 240 | | black atramentized | polished | with multi-component grips | 4.6 | 3.0 | 470 |
| 09 12 240 T | 079958 | 240 | | black atramentized | polished | with multi-component grips and integrated tether attachment point | 4.6 | 3.0 | 474 |

* Other tools with tethering can be found from page 254 ff

Pliers for Electrical Installation

13

The all-rounder for professionals



Multifunctional pliers for the electrical installation; to grip flat and round material, for bending, deburring, cutting cable, stripping and crimping end sleeves (ferrules)

6 functions in one pair of pliers

- > smooth surfaces near the tips grip single cores without damaging them; serrated gripping surfaces and pipe grip for gripping flat and round material
- > clear-cut outside edge on the jaw for working on flush-mounted junction boxes and deburring feed-through holes
- > stripping holes for conductors of 0.75 - 1.5 mm² and 2.5 mm² crimp die for wire-end ferrules 0.5 - 2.5 mm²
- > cable shears with (induction-hardened) precision cutting edges for copper and aluminium cables up to 5 x 2.5 mm² / dia. 15 mm
- > slim dimensions for easy access
- > bolted joint: precise, zero backlash operation of pliers
- > High-grade special tool steel, forged, multi stage oil-hardened

13 82 200 T*

pliers with tether attachment point for mounting a fall protection



13 81 200



13 82 200



13 82 200 T




13 86 200



13 91 200



13 92 200

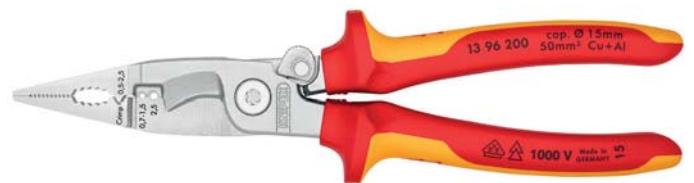

13 96 200





- Smooth gripping surface**
for a non-damaging gripping and flattening, round-shaping (form wire loops)
- Profiled gripping surface**
to protect the workpiece, flattened for stronger yet gentle gripping
- Clear-cut outside edge**
for deburring and widening holes
- Pipe grip**
for round parts and cables
- Universal crimp die**
for end sleeves (ferrules) from 0.5 to 2.5 mm²
- Stripping**
for copper conductors from 0.75 to 1.5 and 2.5 mm²
- Shear blade**
for cutting copper cable up to Ø 15 mm (5 x 2.5 mm²)

13 91 200 / 13 92 200 / 13 96 200
in case of models with opening spring integrated in the joint, the activated locking lever keeps the cutting edges closed while other functions remain active; the intelligent latching mechanism enables you to "grip" without opening the pliers. The cutting edge remains closed and protected.

Product video



| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Cutting capacities | | Stripping capacity for cross-sections mm ² | Crimping capacity mm ² | ⚖ g |
|--------------------|-----------------|---------|--------------------|----------|---|--------------------|----------------------|--|---|--------|
| | | | | | | ⊕ Ø mm | ⊕ mm ² | | | |
| 13 81 200 | 075240 | 200 | black atramentized | polished | plastic coated | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 265 |
| 13 82 200 | 075080 | 200 | black atramentized | polished | with multi-component grips | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 280 |
| 13 82 200 T | 079972 | 200 | black atramentized | polished | with multi-component grips and integrated tether attachment point | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 284 |
| 13 86 200 | 075097 | 200 | chrome plated | | insulate with multi-component grips, VDE-tested | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 280 |
| 13 91 200 | 075257 | 200 | black atramentized | polished | plastic coated | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 265 |
| 13 92 200 | 075103 | 200 | black atramentized | polished | with multi-component grips | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 280 |
| 13 96 200 | 075110 | 200 | chrome plated | | insulate with multi-component grips, VDE-tested | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 280 |



Electricians' Pliers

13

- > the ideal pliers for cable work
- > for gripping and bending wire
- > for cutting medium and hard wire
- > precision cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > with precision stripping holes
- > for crimping end sleeves (ferrules)
- > Vanadium steel, forged, multi stage oil-hardened

13 05 160 T*

pliers with tether attachment point for mounting a fall protection



Gripping



Cutting



Stripping



Crimping 0.5 to 2.5 mm²



13 01 160



13 02 160



13 05 160



13 05 160 T




| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | Stripping capacities mm ² | g |
|-------------|-----------------|---------|--|--------------------|----------|---|--------------------|----------|---|-------|
| | | | | | | | Ø mm | Ø mm | | |
| 13 01 160 | 034971 | 160 | | black atramentized | polished | plastic coated | 2.5 | 1.6 | 0.5 - 0.75 / 1.5 / 2.5 | 112 |
| 13 02 160 | 010470 | 160 | | black atramentized | polished | with multi-component grips | 2.5 | 1.6 | 0.5 - 0.75 / 1.5 / 2.5 | 139 |
| 13 05 160 | 071426 | 160 | | chrome plated | | with multi-component grips | 2.5 | 1.6 | 0.5 - 0.75 / 1.5 / 2.5 | 139 |
| 13 05 160 T | 079965 | 160 | | chrome plated | | with multi-component grips and integrated tether attachment point | 2.5 | 1.6 | 0.5 - 0.75 / 1.5 / 2.5 | 143 |

Round Nose Pliers with cutting edge

(Jewellers' Pliers)

DIN ISO 5743

19

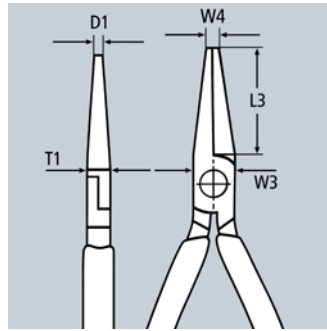

- > for gripping and manipulating fine wires, e.g. in jewellery work
- > ideal for cutting and bending activities, also in electronics
- > for bending wire loops
- > precision-ground round jaws with fine, pointed tips
- > cutting edges additionally induction hardened, cutting edgehardness approx. 60 HRC
- > Vanadium steel, forged, multi stage oil-hardened



19 01 130
8


| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | Dimensions | | | | | g |
|-------------|-----------------|---------|--|--------------------|----------|----------------|--------------------|------|------------|----------|----------|----------|----------|-------|
| | | | | | | | Ø mm | Ø mm | D1 mm | L3 mm | T1 mm | W3 mm | W4 mm | |
| 19 01 130 | 034995 | 130 | | black atramentized | polished | plastic coated | 2.2 | 1.6 | 1.0 | 32.0 | 8.0 | 13.5 | 2.0 | 73 |
| 19 03 130 | 014348 | 130 | | chrome plated | | plastic coated | 2.2 | 1.6 | 1.0 | 32.0 | 8.0 | 13.5 | 2.0 | 72 |

Flat Nose Pliers with cutting edges

(Precision Mechanics Pliers)

DIN ISO 5745

23

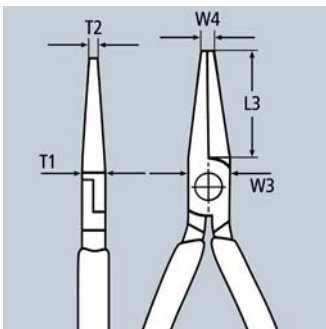

- > suitable for gripping and cutting work in fine mechanics
- > flat, long jaws, tapering
- > cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened



23 01 140


| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Cutting capacities | | Dimensions | | | | | g |
|-------------|-----------------|---------|--|----------|----------------|--------------------|------|------------|----------|----------|----------|----------|-------|
| | | | | | | Ø mm | Ø mm | T1 mm | L3 mm | W3 mm | W4 mm | T2 mm | |
| 23 01 140 | 041290 | 140 | | polished | plastic coated | 2.5 | 1.6 | 7.0 | 35.0 | 12.5 | 3.0 | 4.5 | 75 |

Snipe Nose Pliers with centre cutter

(Telephone Pliers)

DIN ISO 5743

27

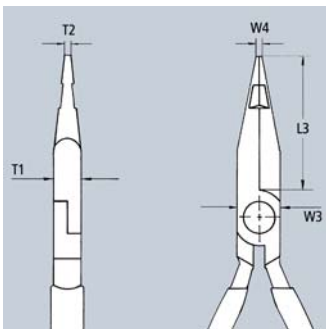

- > for gripping and separating of single wires in harnesses
- > with centre cutter for soft wire
- > half-round jaws
- > knurled gripping surfaces
- > Chrome vanadium electric steel, forged, oil-hardened



27 01 160

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Dimensions | | | | | g |
|-------------|-----------------|---------|--|----------|----------------|------------|----------|----------|----------|----------|-------|
| | | | | | | L3 mm | W3 mm | T1 mm | W4 mm | T2 mm | |
| 27 01 160 | 016106 | 160 | | polished | plastic coated | 47.0 | 16.5 | 9.5 | 3.0 | 2.0 | 120 |



Snipe Nose Side Cutting Pliers

(Radio Pliers)

DIN ISO 5745

25

- > suitable for finer gripping and cutting work
- > pointed, half-round jaws
- > knurled gripping surfaces
- > with cutting edges for soft, medium-hard and hard wire
- > cutting edges additionally induction hardened, cutting edge hardness approx. 61 HRC
- > Vanadium steel, forged, multi stage oil-hardened

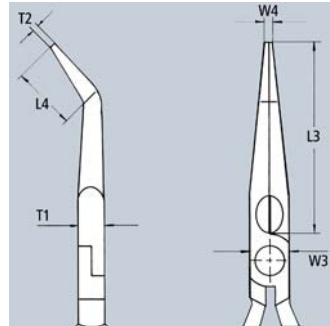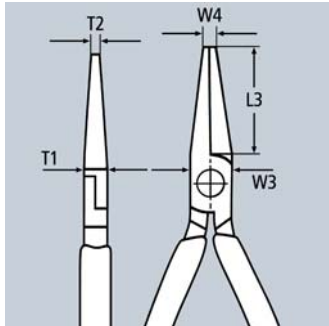

| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Cutting capacities | | Dimensions | | | | | | | |
|-------------|--------------|------|-------------------------|---------------------|--|--|--------|------------|-------|-------|-------|-------|-------|-----|-----|
| | | | | | | ● Ø mm | ● Ø mm | L3 mm | L4 mm | W3 mm | T1 mm | W4 mm | T2 mm | ⚖ g | |
| 25 01 125 | 015932 | 125 | black atra-mentized | polished | plastic coated | 2.2 | 1.6 | 27.0 | | 13.0 | 7.0 | 2.5 | 1.8 | 73 | |
| 25 01 140 | 013082 | 140 | Ⓟ Ⓢ Ⓣ | polished | plastic coated | 2.5 | 1.6 | 42.0 | | 15.0 | 8.0 | 2.5 | 2.0 | 89 | |
| 25 01 160 | 013099 | 160 | Ⓟ Ⓢ Ⓣ | polished | plastic coated | 2.5 | 1.6 | 50.0 | | 16.5 | 9.0 | 3.0 | 2.5 | 113 | |
| 25 02 140 | 023159 | 140 | Ⓟ Ⓢ Ⓣ | polished | with multi-component grips | 2.5 | 1.6 | 42.0 | | 15.0 | 8.0 | 2.5 | 2.0 | 109 | |
| 25 02 160 | 023166 | 160 | Ⓟ Ⓢ Ⓣ | polished | with multi-component grips | 2.5 | 1.6 | 50.0 | | 16.5 | 9.0 | 3.0 | 2.5 | 144 | |
| 25 03 125 | 043065 | 125 | Ⓟ Ⓢ Ⓣ | chrome plated | plastic coated | 2.2 | 1.6 | 27.0 | | 13.0 | 7.0 | 2.5 | 1.8 | 72 | |
| 25 05 140 | 035015 | 140 | Ⓟ Ⓢ Ⓣ | chrome plated | with multi-component grips | 2.5 | 1.6 | 42.0 | | 15.0 | 8.0 | 2.5 | 2.0 | 111 | |
| 25 05 160 | 022817 | 160 | Ⓟ Ⓢ Ⓣ | chrome plated | with multi-component grips | 2.5 | 1.6 | 50.0 | | 16.5 | 9.0 | 3.0 | 2.5 | 144 | |
| 25 06 160 | 033806 | 160 | ⚡ 1000V Ⓢ Ⓣ Ⓟ Ⓢ Ⓣ | chrome plated | insulated with multi-component grips, VDE-tested | 2.5 | 1.6 | 50.0 | | 16.5 | 9.0 | 3.0 | 2.5 | 146 | |
| 25 21 160 | 015994 | 160 | ⚡ 40° Ⓟ Ⓢ Ⓣ | black atra-mentized | polished | plastic coated | 2.5 | 1.6 | 50.0 | 23.0 | 16.5 | 9.0 | 3.0 | 2.5 | 112 |
| 25 25 160 | 016007 | 160 | ⚡ 40° Ⓟ Ⓢ Ⓣ | chrome plated | | VDE-tested | 2.5 | 1.6 | 50.0 | 23.0 | 16.5 | 9.0 | 3.0 | 2.5 | 143 |
| 25 26 160 | 052111 | 160 | ⚡ 1000V Ⓢ Ⓣ ⚡ 40° Ⓟ Ⓢ Ⓣ | chrome plated | | insulated with multi-component grips, VDE-tested | 2.5 | 1.6 | 50.0 | 23.0 | 16.5 | 9.0 | 3.0 | 2.5 | 144 |

Snipe Nose Side Cutting Pliers

(Stork Beak Pliers)




DIN ISO 5745

26

Elastic tips: dimensionally stable even when twisted

- > distortion-tolerant, elastic precision tips
- > half-round, long, pointed jaws
- > with cutting edges (hardness approx. 61 HRC) for soft, medium-hard and hard wire
- > Vanadium steel, forged, multi stage oil-hardened

26 12 200 T / 26 15 200 T / 26 22 200 T / 26 25 200 T*
pliers with tether attachment point for mounting a fall protection

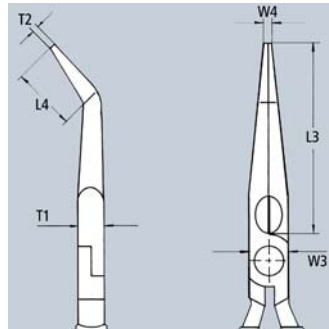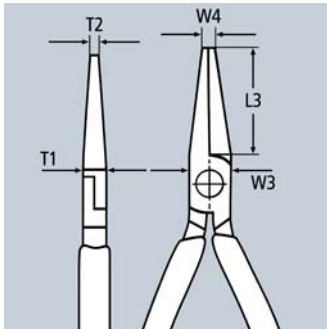

26 11 200
⊖  




26 15 200
⊖  







26 22 200
∠40° ⊖  

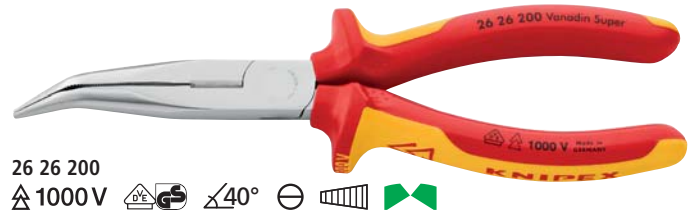


26 25 200 T
∠40° ⊖  



26 26 200
⚡ 1000V   ∠40° ⊖  

| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Cutting capacities | | Dimensions | | | | | | |
|-------------|--------------|------|--------------------|----------|---|--------------------|-----------|------------|----------|----------|----------|----------|----------|--------|
| | | | | | | ⊖ ∅ mm | ⊖ ∅ mm | L3 mm | L4 mm | T1 mm | W3 mm | W4 mm | T2 mm | ⚖ g |
| 26 11 200 | 022824 | 200 | black atramentized | polished | plastic coated | 3.2 | 2.2 | 73.0 | | 9.5 | 18.0 | 3.0 | 2.5 | 170 |
| 26 12 200 | 023142 | 200 | black atramentized | polished | with multi-component grips | 3.2 | 2.2 | 73.0 | | 9.5 | 18.0 | 3.0 | 2.5 | 201 |
| 26 12 200 T | 079989 | 200 | black atramentized | polished | with multi-component grips and integrated tether attachment point | 3.2 | 2.2 | 73.0 | | 9.5 | 18.0 | 3.0 | 2.5 | 205 |
| 26 13 200 | 040590 | 200 | chrome plated | | plastic coated | 3.2 | 2.2 | 73.0 | | 9.5 | 18.0 | 3.0 | 2.5 | 169 |
| 26 15 200 | 035022 | 200 | chrome plated | | with multi-component grips | 3.2 | 2.2 | 73.0 | | 9.5 | 18.0 | 3.0 | 2.5 | 198 |
| 26 15 200 T | 035022 | 200 | chrome plated | | with multi-component grips and integrated tether attachment point | 3.2 | 2.2 | 73.0 | | 9.5 | 18.0 | 3.0 | 2.5 | 202 |
| 26 16 200 | 022831 | 200 | chrome plated | | insulated with multi-component grips, VDE-tested | 3.2 | 2.2 | 73.0 | | 9.5 | 18.0 | 3.0 | 2.5 | 206 |
| 26 17 200 | 016069 | 200 | chrome plated | | with dipped insulation, VDE-tested | 3.2 | 2.2 | 73.0 | | 9.5 | 18.0 | 3.0 | 2.5 | 212 |
| 26 21 200 | 022848 | 200 | black atramentized | polished | plastic coated | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 18.0 | 3.0 | 2.5 | 171 |
| 26 22 200 | 023135 | 200 | black atramentized | polished | with multi-component grips | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 18.0 | 3.0 | 2.5 | 197 |
| 26 22 200 T | 080008 | 200 | black atramentized | polished | with multi-component grips and integrated tether attachment point | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 18.0 | 3.0 | 2.5 | 201 |
| 26 25 200 | 035039 | 200 | chrome plated | | with multi-component grips | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 18.0 | 3.0 | 2.5 | 199 |
| 26 25 200 T | 080015 | 200 | chrome plated | | with multi-component grips and integrated tether attachment point | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 18.0 | 3.0 | 2.5 | 203 |
| 26 26 200 | 022855 | 200 | chrome plated | | insulated with multi-component grips, VDE-tested | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 18.0 | 3.0 | 2.5 | 204 |
| 26 27 200 | 016090 | 200 | chrome plated | | with dipped insulation, VDE-tested | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 18.0 | 3.0 | 2.5 | 220 |

* Other tools with tethering can be found from page 254 ff

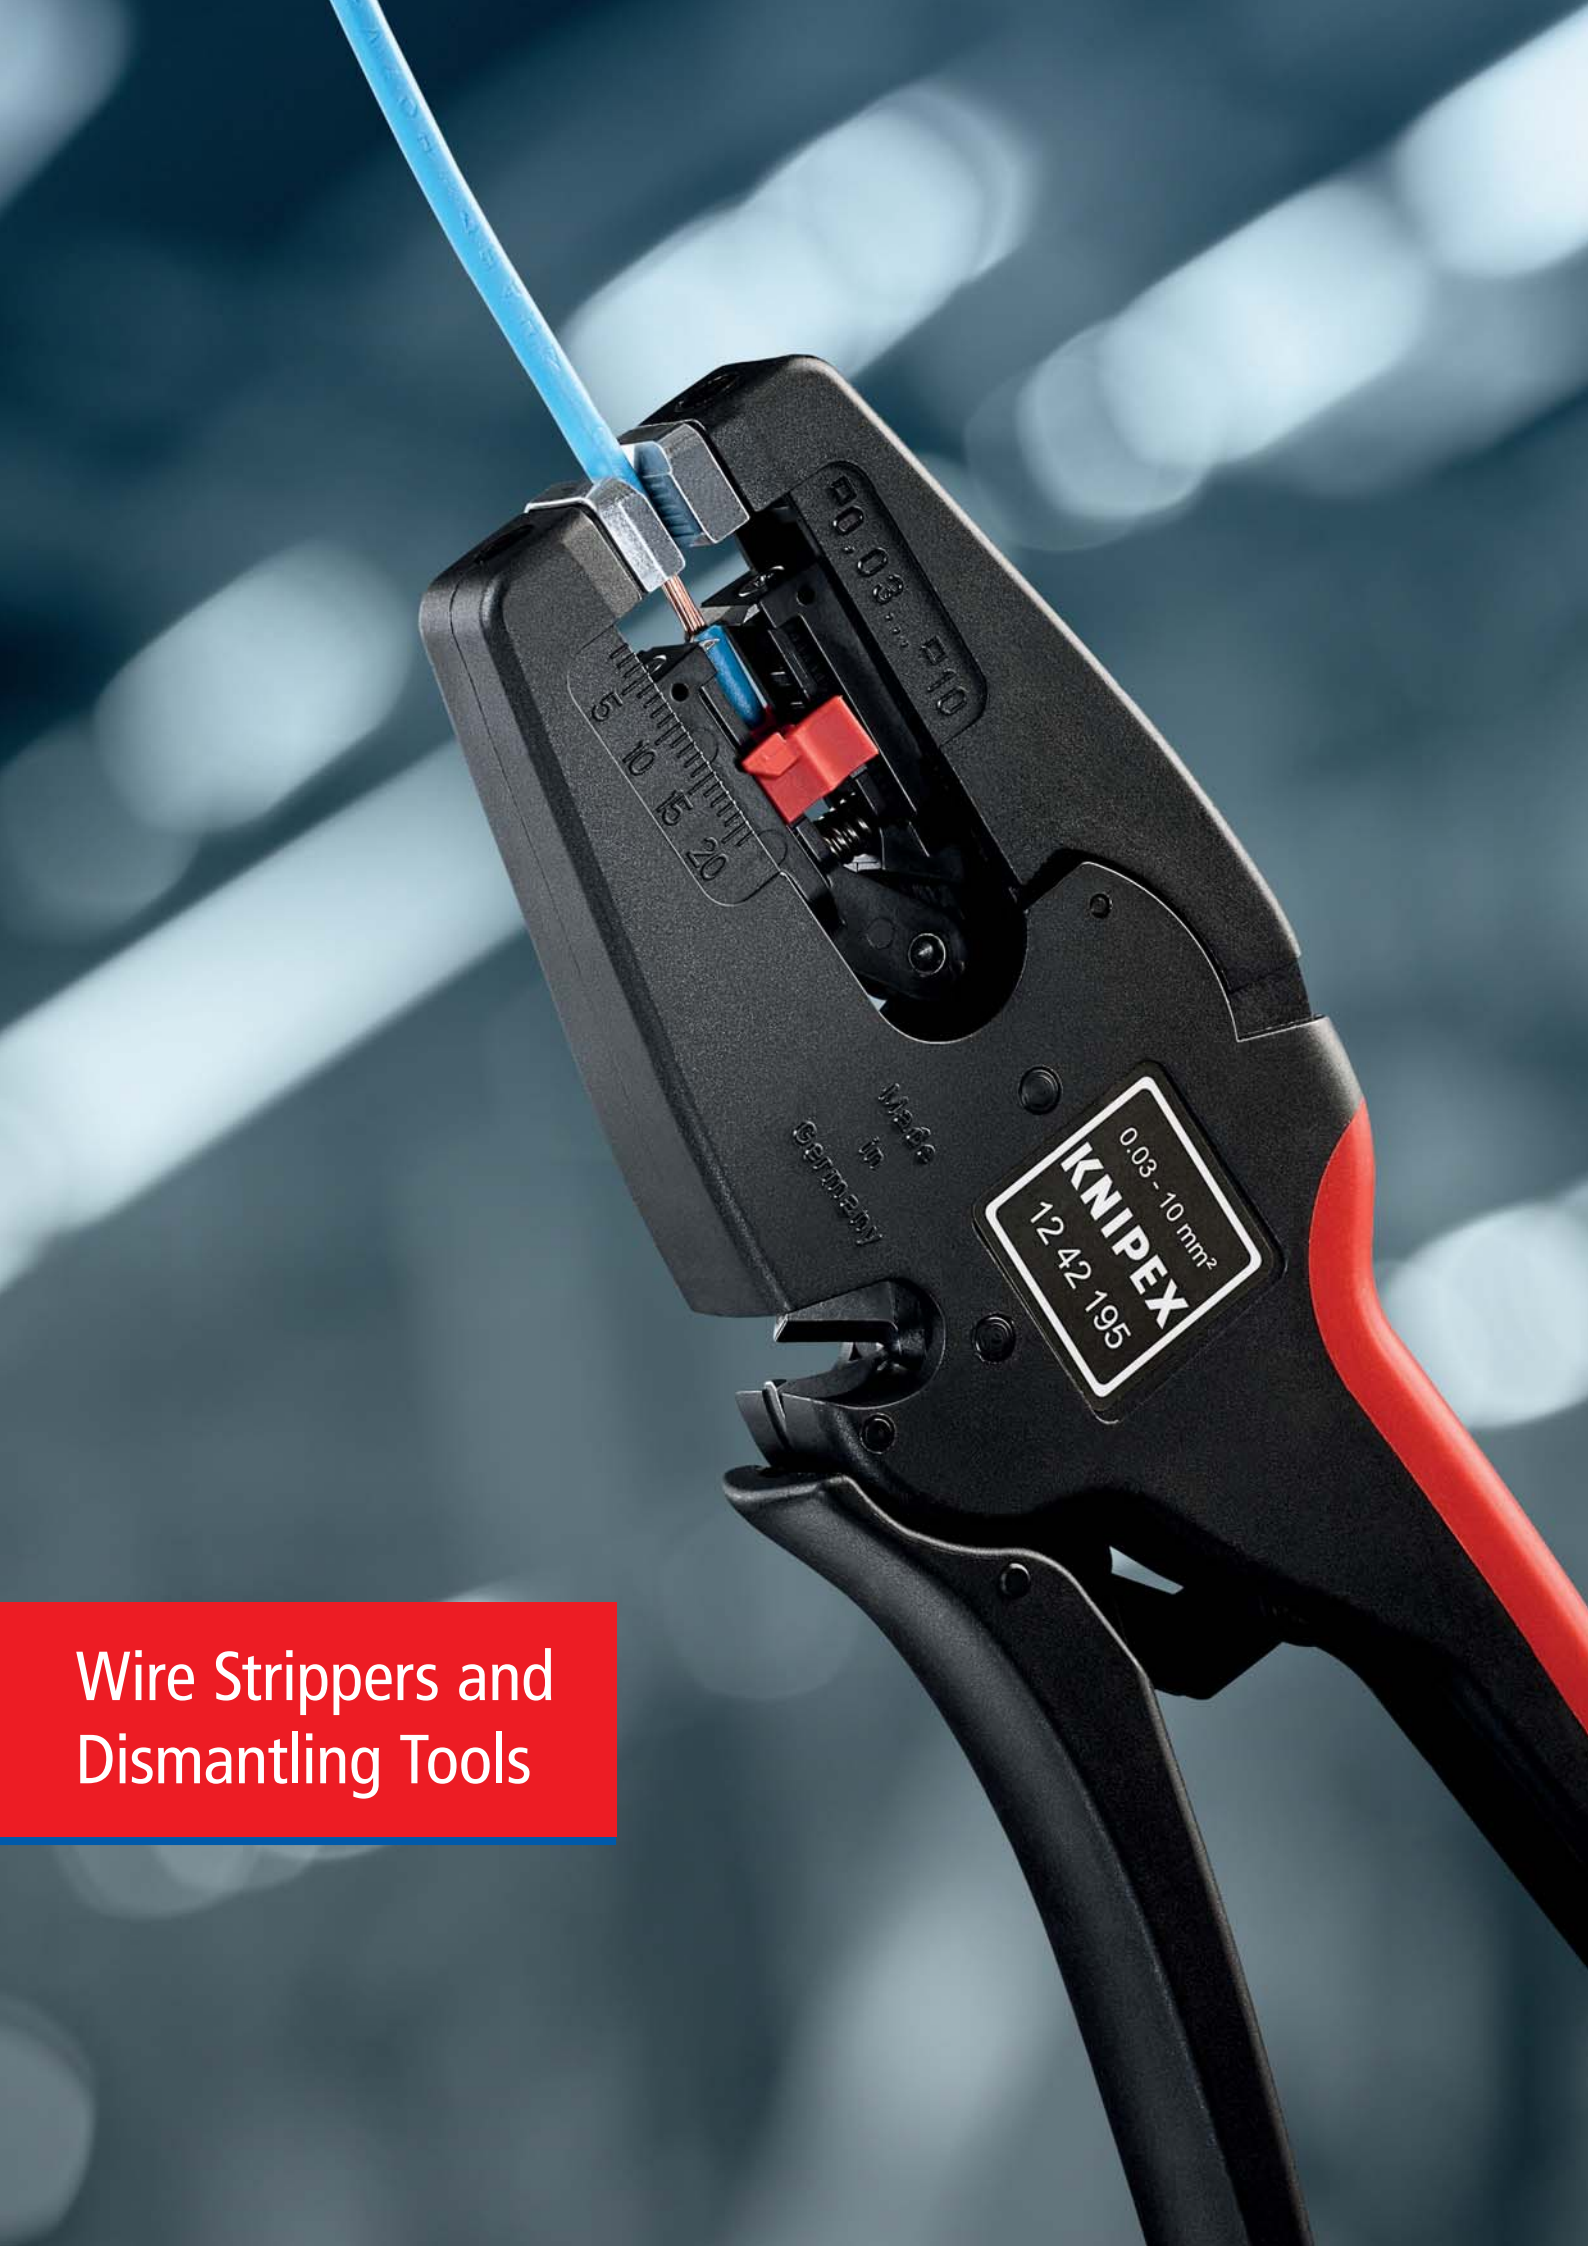

Wire Strippers and
Dismantling Tools

PO-03...P10
5 10 15 20

Made
in
Germany

0.03 - 10 mm²
KNIPLEX
12 42 195


| | |
|--|----|
| Insulation Stripper | 42 |
| Electronics Wire Stripping Shears | 42 |
| Electronics Wire Stripper | 43 |
| Diagonal Insulation Strippers | 43 |
| Precision Insulation Strippers | 44 |
| Insulation Strippers with adapted blades | 45 |
| MultiStrip 10 Automatic Insulation Stripper | 46 |
| Self-Adjusting Insulation Strippers | 47 |
| Automatic Insulation Stripper | 47 |
| Automatic Insulation Stripper for flat cable | 48 |
| Mini Stripping Tool | 48 |
| Wire Stripper for fibre optics | 49 |
| Stripping Tool for fibre optics | 49 |
| Stripping Tweezers for Coated Wire | 49 |
| Dismantling Pliers | 50 |
| Insulation Strippers | 51 |
| Dismantling Tools | 51 |
| Stripping Tool for coax cables | 53 |
| Dismantling Tool for flat and round cables | 54 |
| Dismantling Tool for data cables | 54 |
| Universal Dismantling Tools | 55 |
| ErgoStrip® Universal Dismantling Tool | 56 |



Insulation Strippers

11

- > for single, multiple and fine stranded conductors with plastic or rubber insulation max. 5.0 mm dia. or resp. 10 mm² cable cross section
- > easy adjustment to the required diameter of solid or stranded wire with knurled screw and lock nut
- > Special tool steel, forged, oil-hardened

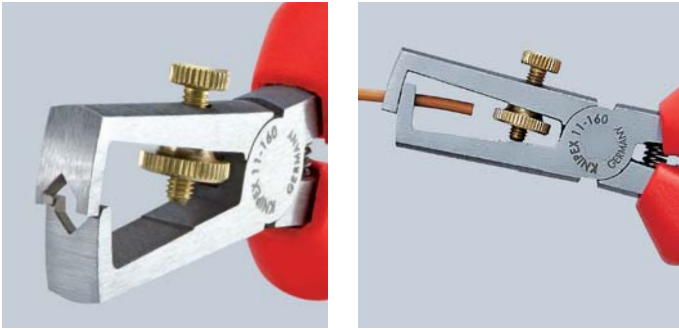

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Stripping capacities | | | g |
|-------------|--------------|------|-------|--------------------|----------|--|----------------------|-----------------|-----|-----|
| | | | | | | | Ø mm | mm ² | AWG | |
| 11 01 160 | 013556 | 160 | MM | black atramentized | polished | plastic coated | 5.0 | 10 | 7 | 131 |
| 11 02 160 | 023180 | 160 | MM | black atramentized | polished | with multi-component grips | 5.0 | 10 | 7 | 165 |
| 11 05 160 | 039570 | 160 | MM | chrome plated | | with multi-component grips | 5.0 | 10 | 7 | 157 |
| 11 06 160 | 021933 | 160 | 1000V | chrome plated | | insulated with multi-component grips, VDE-tested | 5.0 | 10 | 7 | 166 |
| 11 07 160 | 015499 | 160 | 1000V | chrome plated | | with dipped insulation, VDE-tested | 5.0 | 10 | 7 | 180 |
| 11 12 160 | 034964 | 160 | | black atramentized | polished | with multi-component grips | 5.0 | 10 | 7 | 156 |
| 11 17 160 | 015505 | 160 | 1000V | chrome plated | | with dipped insulation, VDE-tested | 5.0 | 10 | 7 | 181 |

Electronics Wire Stripping Shears

11
8



- > for cutting and stripping single, multiple and fine-stranded conductors with up to 0.75 mm² cable cross-section
- > easy adjustment to the required diameter of solid or stranded wire with knurled screw and lock nut
- > with opening spring
- > Special tool steel, oil-hardened



| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Stripping capacities mm ² | g |
|-------------|--------------|------|--|------|---------|--------------------------------------|---|
| | | | | | | | |

Electronics Wire Stripper

11
9

- > for single, multiple and fine stranded cables having a diameter from 0.1 up to 0.8 mm, with plastic or rubber insulation
- > easy adjustment to the required diameter of solid or stranded wire with knurled screw and lock nut
- > with opening spring
- > the mirror polish together with a fine film of oil offer effective rust protection – no circuit faults caused by peeling chrome from plated tools
- > Special tool steel, forged, oil-hardened



11 92 140
✂️

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Stripping capacities Ø mm | ⚖ g |
|-------------|--------------|------|----|-----------------|----------------------------|---------------------------|-----|
| 11 92 140 | 016908 | 140 | ✂️ | mirror polished | with multi-component grips | 0.1 - 0.8 | 99 |

Diagonal Insulation Strippers

14

With long cutting edges

High cutting capacity due to high leverage joint

- > precision stripping holes for single conductors of 1.5 and 2.5 mm²
- > convenient cutting of NYM cables up to 5 x 2.5 mm²
- > long tips for ultra fine cutting work also in confined areas
- > induction hardened precision blades,
- > cutting edge hardness approx. 60 HRC
- > Vanadium steel, forged, multi stage oil-hardened



— elongated cutting edge

— improved transmission ratio



14 22 160
✂️



14 25 160
✂️



14 26 160
⚡ 1000 V ⚡

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities mm ² | AWG | Cutting capacities | | ⚖ g |
|-------------|--------------|------|------------|--------------------|----------|--|------------------------------------|---------|--------------------|------|-----|
| | | | | | | | | | ⊘ mm | ⊘ mm | |
| 14 22 160 | 034988 | 160 | ✂️ | black atramentized | polished | with multi-component grips | 1.5 + 2.5 | 15 + 13 | 2.5 | 1.5 | 206 |
| 14 25 160 | 028697 | 160 | ✂️ | chrome plated | | with multi-component grips | 1.5 + 2.5 | 15 + 13 | 2.5 | 1.5 | 206 |
| 14 26 160 | 040279 | 160 | ⚡ 1000 V ⚡ | chrome plated | | insulated with multi-component grips, VDE-tested | 1.5 + 2.5 | 15 + 13 | 2.5 | 1.5 | 216 |

Precision Insulation Strippers

with adapted blades

12
12

- > form-fit stripping also of difficult-to-remove insulating materials made of PTFE, silicone, Radox®, Kapton® and rubber; multi-layer too
- > a second pair of blades holds the remaining insulation reliably in place
- > replaceable shaped blade adapted precisely to the respective conductor cross-section
- > with length stop for constant stripping length during repetitive work
- > pliers body: steel
- > blade: special tool steel, oil-hardened



12 12 02
PATENTED



12 12 12
PATENTED



12 12 02 with cable guide and length stop



Precise cutting of the insulation to a complete extent



Positive stripping thanks to precise shape of the blades

12 12 02

with additional cable guide for exact positioning of the cable in the stripping area of the blade


12 12 11 / 12 12 12 for solar cables

specially adapted to multi-layered and RADOX® insulations; with additional cable support for a better centring of multi-layer insulated conductors in the stripping profiles


12 12 13 / 12 12 14

specially for cables according to US specifications (AWG)


Maximum cable cross-section (in mm²) per profile:




12 19 02




12 19 06




12 19 10




12 19 11



12 19 12



12 19 13




12 19 14

Radox® is a registered trademark of Huber & Suhner AG
Kapton® is a registered trademark of E. I. du Pont de Nemours and Company


Principle of operation with adapted blades

Properly and precise stripping with an annular cut through the complete insulation. This is particularly important with conductors, which must be stripped precisely. This works without any problem even with difficult insulating materials made of PTFE, Radox® and multilayer insulations.

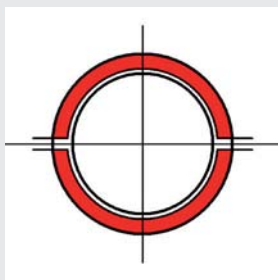

Precisely and reliably

Two pairs of blades (1) cut the insulation to a complete extent. Then the blade pairs move apart, and thus the insulation is removed form-fit (2). The pliers open automatically after the stripping procedure.




| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Stripping capacities mm ² | AWG | ⚖ g |
|-------------|--------------|------------------------------------|---|-----------|----------------------------|---|-----------------------------|-----|
| 12 12 02 | 048077 | 195 | M | burnished | with multi-component grips | 0.03 - 0.09 / 0.14 / 0.38 / 0.57 / 1 / 1.5 / 2.08 | | 447 |
| 12 12 06 | 049005 | 195 | | | | 0.14-0.25 / 0.75 / 1.5 / 2.5 / 4 / 6 | | 445 |
| 12 12 10 | 049012 | 195 | | | | 2.5 / 4 / 6 / 10 | | 445 |
| 12 12 11 | 062998 | 195 | M | burnished | with multi-component grips | 1.5 / 2.5 / 4 / 6 | | 449 |
| 12 12 12 | 073758 | 195 | | | | 4 / 6 / 10 | | 450 |
| 12 12 13 | 062998 | 195 | M | burnished | with multi-component grips | | 10 / 12 / 14 / 16 / 18 / 20 | 449 |
| 12 12 14 | 062998 | 195 | | | | | 16 / 18 / 20 / 22 / 24 / 26 | 450 |
| 12 19 02 | 049036 | 1 Set of spare blades for 12 12 02 | | | | | | |
| 12 19 06 | 049043 | 1 Set of spare blades for 12 12 06 | | | | | | |
| 12 19 10 | 049050 | 1 Set of spare blades for 12 12 10 | | | | | | |
| 12 19 11 | 063001 | 1 Set of spare blades for 12 12 11 | | | | | | |
| 12 19 12 | 073765 | 1 Set of spare blades for 12 12 12 | | | | | | |
| 12 19 13 | 077558 | 1 Set of spare blades for 12 12 13 | | | | | | |
| 12 19 14 | 077565 | 1 Set of spare blades for 12 12 14 | | | | | | |

Insulation Strippers


with adapted blades

12


- > with replaceable blades for 4 or 6 different conductor cross-sections
- > leave wire undamaged thanks to precision-ground blade shapes, even multi-stranded conductors are stripped gently
- > during stripping, the wire is held firmly by clamping jaws
- > with length stop for constant stripping length during repetitive work
- > a spring leads the stripper back to the starting position
- > pliers body: aluminium
- > blade: special tool steel, oil-hardened



12 11 180: wire diameter in mm



12 21 180: wire cross-sections in mm²

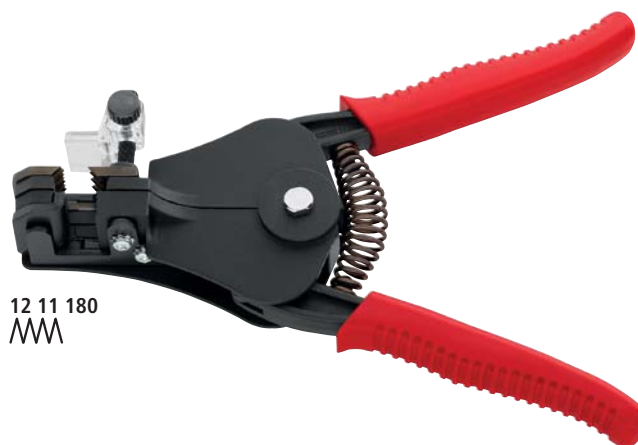

12 11 180
M

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Stripping capacities | | AWG | ⚖ g |
|-------------|--------------|--------------------------------------|---|-----------------|--------------------|------------------------------------|----------------------------------|-----|-----|
| | | | | | | Ø mm | mm ² | | |
| 12 11 180 | 000792 | 180 | M | black lacquered | with plastic grips | 0.5 / 1.2 / 1.6 / 2.0 | | | 368 |
| 12 21 180 | 000815 | 180 | | | | 0.5 - 0.75 / 1 / 1.5 / 2.5 / 4 / 6 | 20 - 19 / 17 / 15 / 13 / 11 / 10 | 366 | |
| 12 19 180 | 022145 | 1 pair of spare blades for 12 11 180 | | | | | | | |
| 12 29 180 | 022152 | 1 pair of spare blades for 12 21 180 | | | | | | | |

KNIPEX MultiStrip 10 Automatic Insulation Stripper

12
42

Stripping without re-adjustment from 0.03 to 10 mm²
 Universal blade geometry – robust and more durable
 Ideal grip design with excellent haptics
 Recessed wire cutter

- > fully automatic adjustment to all single-, multi- and fine-stranded conductors with PVC insulation and a number of special insulation throughout the entire capacity range from 0.03 to 10 mm²
- > no manual fine adjustment necessary, no damage to the conductors
- > the clamping jaws made of steel hold the cable in a way that prevents slipping without damaging the remaining insulation
- > with recessed wire cutter for copper and aluminium conductors, multi-stranded up to 10 mm² and single-stranded up to 6 mm²
- > particularly smooth-running mechanics and very low weight
- > replaceable blades block and length stop
- > handle with soft-plastic zone for a steady grip
- > body: plastic, fibreglass-reinforced
- > blade: special tool steel, oil-hardened



Wire cutter for multiple stranded wire cables up to 10 mm²



Steel clamping jaws avoid skidding of the cable

Patented mechanics

The incision depth of the stripping blade adjusts fully automatically to the diameter of the wire and accordingly also to the thickness of all standard insulating materials. There is no need for any manual adjustment which is still necessary when other conventional pliers with a wide wire-stripping range are used.



Precise stripping from 0.03 to 10 mm² without re-adjustment




Mode of operation of straight cutters

An incision is made in the red area only.

Not suitable for highly-flexible or armoured insulation materials or for multi-layered insulation.

MultiStrip

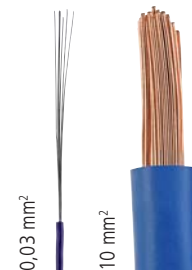

Product video



| Article No. | EAN 4003773- 054580 | ↔ mm 195 | ↔ mm MM | Stripping capacities mm ² 0.03 - 10 | AWG 32 - 7 | ⚖ g 136 |
|-------------|---------------------------|----------------------------------|---------------|--|---------------|---------------|
| 12 42 195 | | | | | | |
| 12 49 21 | 057581 | Spare blades block for 12 42 195 | | | | |
| 12 49 23 | 057604 | Spare length stop for 12 42 195 | | | | |

Self-Adjusting Insulation Strippers

12



12 40 200: Adjustable length stop



12 40 200: Precise stripping prevents damage to the conductor

12 40 200

for thin ribbon cables up to 10 mm width in a single pass

- > for single, multiple and fine stranded conductors with plastic or rubber insulation
- > adapts automatically to the respective cable cross-section; prevents damage to the conductor
- > cutting depth can be adjusted for different insulation materials
- > with wire cutter for copper and aluminium wires, multiple stranded up to 10 mm² and single stranded up to 6 mm²
- > smoothly operating mechanism
- > stripping blades and clamping jaws easily replaceable
- > low weight
- > body: plastic, fibreglass-reinforced
- > blade: special tool steel, oil-hardened



12 40 200
MM

| Article No. | EAN 4003773- | ↔ mm | | Stripping capacities mm ² | AWG | Length stop mm | ⚖ g |
|-------------|--------------|---|----|--------------------------------------|--------|----------------|-----|
| 12 40 200 | 026662 | 200 | MM | 0.03 - 10 | 32 - 7 | 3.0 - 18.0 | 202 |
| 12 50 200 | 034407 | 200 | MM | 2.5 - 16 | 13 - 5 | | 200 |
| 12 49 01 | 026679 | 1 pair of spare blades for 12 40 200 | | | | | |
| 12 49 02 | 026686 | 1 pair of spare clamping jaws for 12 40 200 | | | | | |
| 12 49 03 | 026693 | Spare length stop for 12 40 200 | | | | | |
| 12 49 04 | 053071 | Torsion spring for 12 40/50 200 | | | | | |
| 12 49 05 | 053088 | Coil spring in the head for 12 40/50 200 | | | | | |
| 12 59 01 | 034414 | 1 pair of spare blades for 12 50 200 | | | | | |
| 12 59 02 | 034421 | 1 pair of spare clamping jaws for 12 50 200 | | | | | |

Automatic Insulation Stripper

12
62

- > compact standard tool at a favourable price for all current cable cross-sections and insulating materials
- > for single, multiple and fine stranded cables of 0.2 up to 6 mm² with standard insulation
- > adapts automatically to the respective cable cross-section; prevents damage to the conductor
- > high operation comfort thanks to handy shape and low weight narrow head style for use in confined areas
- > with wire cutter for copper and aluminium wires up to 2.5 mm²
- > with adjustable length stop from 6.0 - 18.0 mm for cutting the same stripping lengths during repetitive work
- > body: plastic, fibreglass-reinforced
- > blades: special tool steel, oil-hardened, interchangeable



12 62 180
MM

| Article No. | EAN 4003773- | ↔ mm | | Stripping capacities mm ² | AWG | ⚖ g |
|-------------|--------------|--------------------------------------|----|--------------------------------------|---------|-----|
| 12 62 180 | 054573 | 180 | MM | 0.2 - 6 | 24 - 10 | 151 |
| 12 69 21 | 060093 | 1 pair of spare blades for 12 62 180 | | | | |
| 12 69 23 | 067115 | Spare length stop for 12 62 180 | | | | |

Automatic Insulation Stripper for flat cable


12
64



- > for PVC insulated flat cables up to a max. 12 mm width and 0.75 to 2.5 mm²
- > adapts automatically to the various conductor heights; prevents damage to the conductor
- > long stripping lengths possible
- > blade replaceable
- > smoothly operating mechanism
- > low weight
- > body: plastic, fibreglass-reinforced
- > blade: special tool steel, oil-hardened




12 64 180


| Article No. | EAN | ↔ mm | | Stripping capacities mm ² | AWG | ⚖ g | |
|-------------|--------|--------------------------------------|---|--------------------------------------|---------|-----|--|
| 12 64 180 | 073284 | 180 |  | 0.75 - 2.5 | 19 - 13 | 125 | |
| 12 69 31 | 073932 | 1 pair of spare blades for 12 64 180 | | | | | |

Mini Stripping Tool

12
80

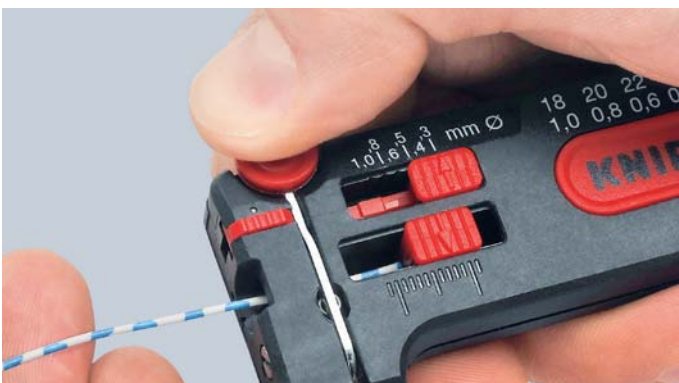


- > precise stripping, stepwise adjustment to the conductor diameters with wire cutter
- > adjustable length stop from 4.0 - 15.0 mm
- > with locking device
- > housing: plastic, impact-proof



12 80 040 SB
for thin copper conductors dia. 0.12 to 0.4 mm

12 80 100 SB
for thin copper conductors dia. 0.3 to 1.0 mm

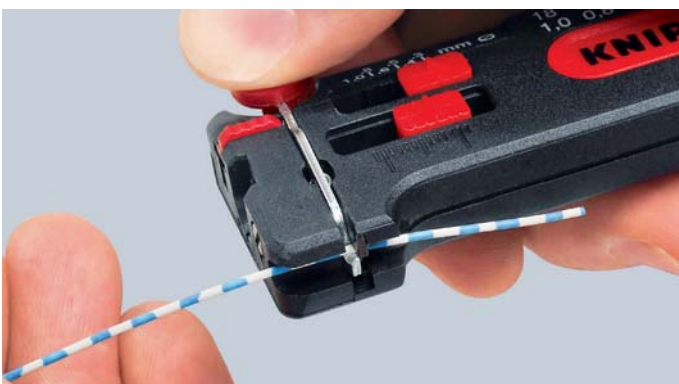

12 80 100 SB

| Article No. | EAN | ↔ mm | | Stripping capacities Ø mm | AWG | ⚖ g |
|--------------|--------|------|---|---------------------------|---------|-----|
| 12 80 040 SB | 071655 | 100 |  | 0.12 - 0.4 | 36 - 26 | 52 |
| 12 80 100 SB | 043119 | 100 |  | 0.30 - 1.0 | 28 - 18 | 34 |

Wire Stripper
for fibre optics

12
82

- > to remove primary and secondary coating of fibre optics
- > Chrome vanadium electric steel in special quality, oil-hardened




12 82 130 SB

| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Stripping capacities Ø mm | ⚖ g |
|--------------|-----------------|---------|-----------|--------------------|---|--------|
| 12 82 130 SB | 050094 | 130 | burnished | with plastic grips | primary-coating: 0.125 mm / secondary-coating: 0.250 mm | 69 |

Stripping Tool
for fibre optics

12
85

- > to remove primary coating of fibre optics Ø 0.125 mm
- > blade dia. 0.18 mm, hole for cable feeding 0.30 mm dia.
- > adjustable length stop
- > housing: plastic, impact-proof

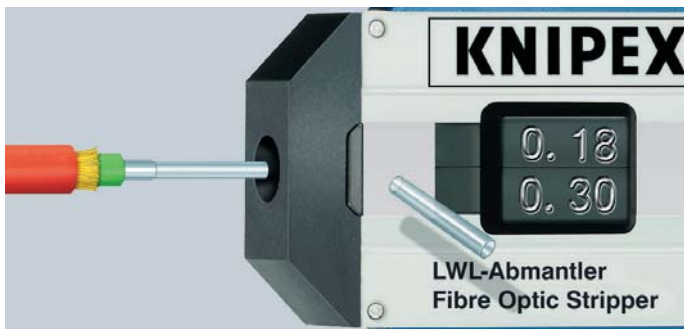


12 85 100 SB

| Article No. | EAN 4003773- | ↔ mm | Stripping capacities Ø mm | ⚖ g |
|--------------|-----------------|---------|------------------------------|--------|
| 12 85 100 SB | 043126 | 100 | Primary coating 0.125 mm | 44 |

Stripping Tweezers for Coated Wire

15
11

- > for stripping off varnished insulation on copper wires
- > blades for other wire diameters available as spare parts
- > tweezers body: spring steel, oil-hardened
- > handle shells: plastic

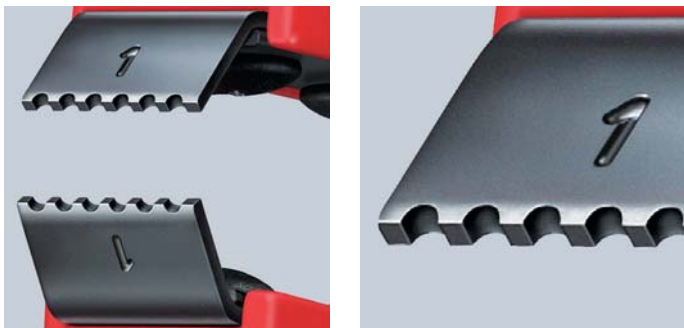

15 11 120

| Article No. | EAN 4003773- | ↔ mm | Stripping capacities Ø mm | ⚖ g |
|-------------|-----------------|---------|------------------------------|--------|
| 15 11 120 | 015550 | 120 | 0.6 | 34 |

| | | | | |
|-----------|--------|--|--|--|
| 15 19 005 | 021551 | 1 pair of spare blades for 15 11 120, Ø 0.5 mm | | |
| 15 19 006 | 021568 | 1 pair of spare blades for 15 11 120, Ø 0.6 mm | | |
| 15 19 008 | 021575 | 1 pair of spare blades for 15 11 120, Ø 0.8 mm | | |
| 15 19 010 | 021582 | 1 pair of spare blades for 15 11 120, Ø 1.0 mm | | |

Dismantling Pliers

DIN ISO 5746

13

NEW

Multifunctional – cutting, dismantling and stripping with one pair of pliers.


For time-saving dismantling and stripping of all common round and damp-proof installation cables (e.g. NYM cable)

Simplified access especially to deep mounted flush sockets thanks to slim head design and optimally angled cable sheath cutter


Strip cables easily and without damage thanks to circular cutting edge with depth limit

- > suitable for universal use: precision wire stripping holes for conductors from 1.5 and 2.5 mm²
- > with diagonal cutters for cutting and trimming conductors, wires, small screws and nails
- > all cutters additionally induction hardened to approx. 61 HRC for high wear resistance
- > 30% lighter than comparable pliers
- > Vanadium steel, forged, multi stage oil-hardened

Product video

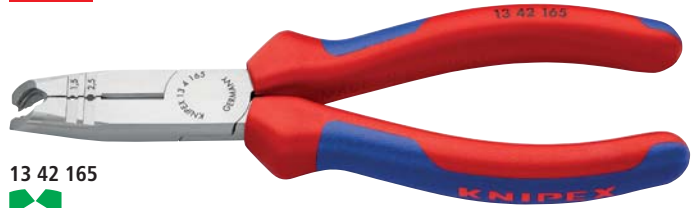

13 42 165

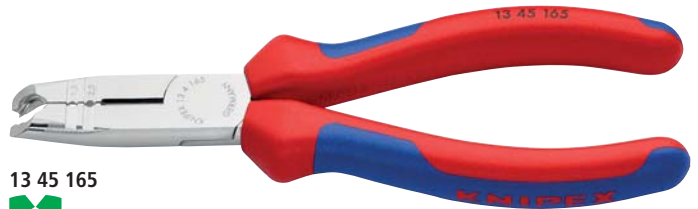

13 45 165



13 46 165




Stripping holes for conductors of 1.5 mm² and 2.5 mm²



Cutting cable up to 13 mm diameter



Cutting edges shortening of single wires

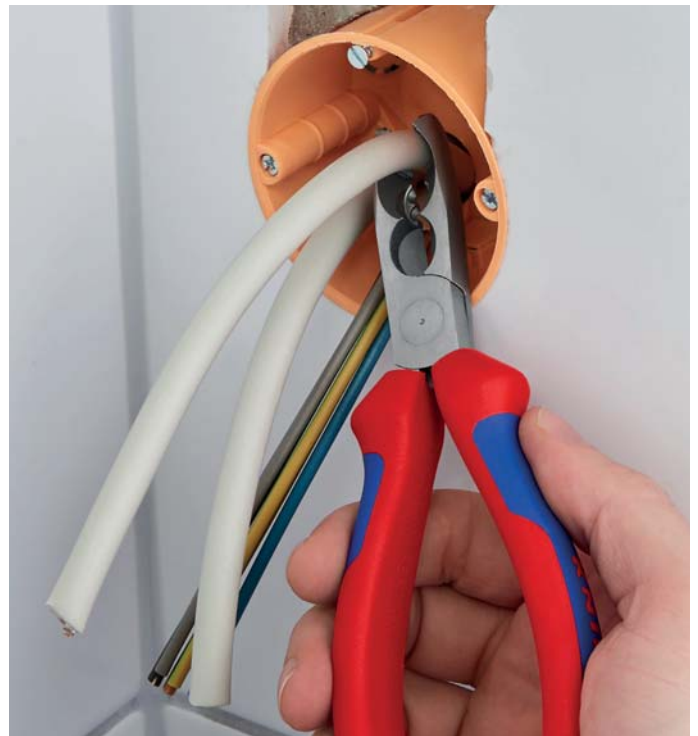

Dismantling deep down in a flush-mounted socket

| Article No. | EAN | ↔ mm | | Pliers | Head | Handles | Dismantling capacities Ø mm | Stripping capacities mm ² | ◐ Ø mm | ◑ Ø mm | ⚖ g |
|-------------|--------|------|-----------|-----------------------|----------|--|--------------------------------|---|--------|--------|-----|
| 13 42 165 | 079675 | 165 | ✔ | black atramentized | polished | with multi-component grips | 8 - 13 | 1.5 / 2.5 | 3.2 | 2.2 | 176 |
| 13 45 165 | 079699 | 165 | ✔ | chrome plated | | with multi-component grips | 8 - 13 | 1.5 / 2.5 | 3.2 | 2.2 | 176 |
| 13 46 165 | 079910 | 165 | ✔ ⚡ 1000V | chrome plated | | insulated with multi-component grips, VDE-tested | 8 - 13 | 1.5 / 2.5 | 3.2 | 2.2 | 190 |

Insulation Strippers

15




- > for stripping thin cables
- > accurate boring to match diameter of wire, precise stripping prism; non-adjustable
- > with opening spring
- > Chrome vanadium electric steel, forged, oil-hardened

15 61 160

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Stripping capacities Ø mm | ⚖ g |
|-------------|--------------|------|--|----------|----------------|---------------------------|-----|
| 15 51 160 | 044451 | 160 | | polished | plastic coated | 0,5 | 101 |
| 15 61 160 | 014843 | 160 | | polished | plastic coated | 0,6 | 102 |
| 15 81 160 | 015574 | 160 | | polished | plastic coated | 0,8 | 102 |

Dismantling Tools

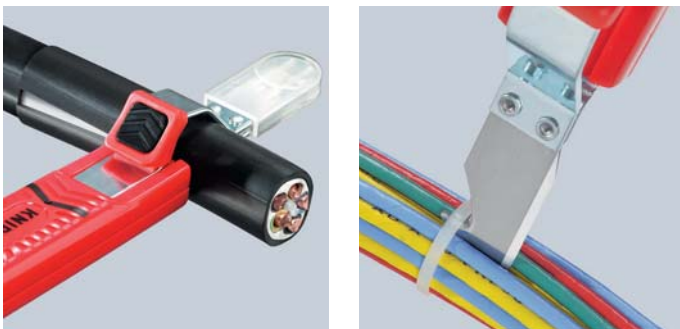16
20

- > for stripping all common round cables
- > self-tightening holding lever
- > with adjusting screw for cutting depth adjustment
- > turnable blade for circular and longitudinal cutting
- > spare blade inside the handle
- > secure grip due to soft component material on handle and holding lever to avoid slipping
- > housing: plastic, impact-proof

16 20 165 SB
with knife and hook blade, protective cap included16 20 16 SB
16 20 165 SB

| Article No. | EAN 4003773- | ↔ mm | | Stripping capacities Ø mm | ⚖ g |
|--------------|--------------|------|--|---------------------------|-----|
| 16 20 16 SB | 060451 | 130 | | 4.0 - 16.0 | 95 |
| 16 20 28 SB | 060468 | 130 | | 8.0 - 28.0 | 95 |
| 16 20 165 SB | 043133 | 165 | | 8.0 - 28.0 | 85 |

| | | | | | | |
|-----------|--------|---|--|--|--|--|
| 16 29 165 | 043140 | Spare blade 16 20 16 SB / 16 20 28 SB / 16 20 165 SB | | | | |
|-----------|--------|---|--|--|--|--|

Dismantling Tool


16
30

- > for dismantling round cable sheaths made of PVC, rubber, silicone or PTFE from 6.0 - 29.0 mm dia.
- > self-tightening holding lever
- > with knurled nut for cutting depth adjustment
- > changing from circular to longitudinal cutting by turning the tool body
- > spiral cutting for removing intermediate pieces
- > replaceable blade
- > housing: plastic, impact-proof



Setting the tool for circular cutting




16 30 135 SB




Longitudinal cut



Spiral cutting

| Article No. | EAN | ↔ mm | | Stripping capacities Ø mm | ⚖ g |
|--------------|----------------|------------------------------|---|------------------------------|--------|
| 16 30 135 SB | 4003773-033349 | 135 |  | 6.0 - 29.0 | 120 |
| 16 39 135 | 027317 | Spare blade for 16 30 135 SB | | | |

Dismantling Tool

16
40

- > for dismantling round cables exceeding 25.0 mm dia.
- > removes all kinds of insulation layers
- > suitable for longitudinal and circular cutting
- > cutting depth can be adjusted up to 5.0 mm
- > replaceable blade (both sides can be used)
- > tool body: plastic, fibreglass-reinforced



16 40 150



Setting the tool for longitudinal cut



Longitudinal cut



Turning the tool for circumferential cut



Circular cut

| Article No. | EAN | ↔ mm | Stripping capacities Ø mm | ⚖ g |
|-------------|----------------|---------------------------|------------------------------|--------|
| 16 40 150 | 4003773-026709 | 150 | > 25 | 210 |
| 16 49 150 | 026716 | Spare blade for 16 40 150 | | |



Adjustable cutting depth

Stripping Tool

for coax cables

16
60


- > for stripping coax cables (RG 58, RG 59 and RG 62)
- > for stripping outer sheath, shield and insulation in a single process
- > with three built-in blades
- > the cutting depth of each blade can be adjusted individually by means of a hexagonal key (Allen key)
- > the blade spacing remains constant
- > housing: plastic, impact-proof

16 60 05 SB


3 stripping steps in one operation



Interior layers uncovered individually



Dismantling of Coax-cable in three steps

| Article No. | EAN 4003773- | ↔ mm | | Cable type | ⚖ g |
|--------------------|-----------------|---------|--|----------------------|--------|
| 16 60 05 SB | 044888 | 105 | | RG 58, RG 59 + RG 62 | 73 |

Wire stripping tool

for coax and data cable

16
60

- > universal stripping tool for Coax cables RG 59, RG 6, RG 7, RG 11
- > for stripping outer sheath and interior insulation in a single process
- > adjustable stripping blade for data cable
- > two stripping blades for cutting and stripping telephone ribbon cable (4P/6P/8P) in a single operation
- > integrated blade for cutting data cables
- > housing: plastic, impact-proof

16 60 06 SB


| Article No. | EAN 4003773- | ↔ mm | | Cable type | ⚖ g |
|--------------------|-----------------|---------|--|--------------------------|--------|
| 16 60 06 SB | 077961 | 125 | | RG 59, RG 6, RG 7, RG 11 | 100 |

Stripping Tool

for coax cables

16
60


- > for dismantling and stripping all common coax cables between 4.8 - 7.5 mm dia. (e.g. for TV- and satellite antenna), also suitable for PVC round cable 3 x 0.75 mm²
- > with length scale 5.0 - 20.0 mm
- > double shell, folding back stripping tool
- > with opening spring and locking device
- > body: plastic, fibreglass-reinforced

16 60 100 SB
MM

| Article No. | EAN 4003773- | ↔ mm | | Stripping capacities Ø mm | ⚖ g |
|---------------------|-----------------|---------|----|---|--------|
| 16 60 100 SB | 040811 | 100 | MM | Coax-cables 4.8 - 7.5 mm round cables 3 x 0,75 mm ² | 22 |

Dismantling Tool

for flat and round cables

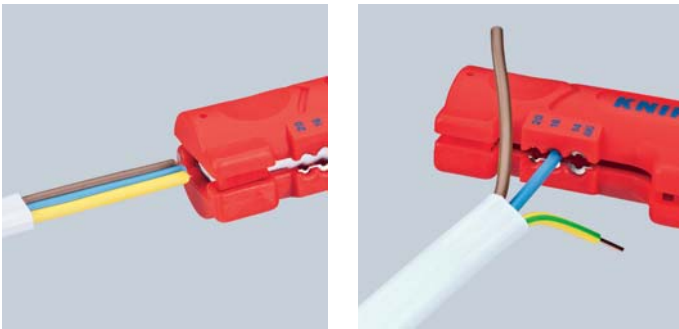16
64

- > for flat cables up to 12 mm in width
- > for dismantling and stripping all common round and damp-proof installation cables Ø 4.0 to 13.0 mm (e.g. NYM cable 3 x 1.5 mm² up to 5 x 2.5 mm²)
- > stripping device for cross-sections 0.8 / 1.5 / 2.5 mm² (AWG 20 / 16 / 14)
- > with opening spring and locking device
- > for use in confined and difficult to access work areas
- > also for use in conduit and distribution boxes
- > body: plastic, fibreglass-reinforced

16 64 125 SB
MM

| Article No. | EAN 4003773- | ↔ mm | | Stripping capacities | | Types of cables | ⚖ g |
|---------------------|-----------------|---------|----|----------------------|-----------------|--|--------|
| | | | | Ø mm | mm ² | | |
| 16 64 125 SB | 076933 | 125 | MM | 4.0 - 13.0 | 0.8 - 2.5 | flat cable 12 mm / round cable Ø 4 - 13 mm | 48 |

Dismantling Tool

for data cables

16
65

- > for stripping UTP and STP data cables with diameters of 4.5 to 10.0 mm
- > stripping device for cross-sections 0.2 / 0.3 / 0.8 / 1.5 / 2.5 / 4 mm²
- > double shell, folding back stripping tool
- > with opening spring and locking device
- > practical clip for easy transport
- > body: plastic, fibreglass-reinforced
- > blades: special tool steel, oil-hardened, TiN-coated

16 65 125 SB
MM

| Article No. | EAN 4003773- | ↔ mm | | Stripping capacities | | Types of cables | ⚖ g |
|---------------------|-----------------|---------|----|----------------------|-----------------|---|--------|
| | | | | Ø mm | mm ² | | |
| 16 65 125 SB | 043157 | 125 | MM | 4.5 - 10.0 | 0.2 - 4 | CAT 5, CAT 6, CAT 7, Twisted-Pair (UTP/STP) | 50 |

Universal Dismantling Tools

16
8

- > for dismantling and stripping all common round and damp-proof installation cables between 8 - 13 mm dia. (e.g. 3 x 1.5 mm² up to 5 x 2.5 mm²)
- > also for use in conduit and distribution boxes
- > double shell, folding back stripping tool
- > with opening spring and locking device
- > practical clip for easy transport
- > body: plastic, fibreglass-reinforced

16 85 125 SB

with additional blade for longitudinal cuts; telescopic blade inside; stripping device for cross-sections 0.2 / 0.3 / 0.8 / 1.5 / 2.5 / 4 mm²; with integrated cable guide for longitudinal cut. This enables rigid insulation (e.g. halogen-free) to be stripped more easily.



16 80 125 SB
MM



16 85 125 SB
MM

| Article No. | EAN 4003773- | ↔ mm | | Stripping capacities | | Types of cables | ⚖ g |
|--------------|-----------------|---------|----|----------------------|-----------------|--|--------|
| | | | | Ø mm | mm ² | | |
| 16 80 125 SB | 040828 | 125 | MM | 8.0 - 13.0 | | round cable, e.g.: 3 x 1.5 mm ² up to 5 x 2.5 mm ² | 71 |
| 16 85 125 SB | 060444 | 125 | MM | 8.0 - 13.0 | 0.2 - 4.0 | round cable, e.g.: 3 x 1.5 mm ² up to 5 x 2.5 mm ² | 67 |

Universal Dismantling Tool

for building and industrial cables

16
90



- > for dismantling and stripping all common round and damp-proof installation cables between 8.0 - 13.0 mm dia. (e.g. 3 x 1.5 mm² up to 5 x 2.5 mm²)
- > specially suitable for larger cross-sections and for difficult insulating materials
- > no adjustment of blades to cutting depth required
- > with opening spring and locking device
- > stripping device for conductors and strands 1.5 mm² and 2.5 mm²
- > two-way length stop (ideal for right and left-handers)
- > fastening device on the end of the handle (fall protection)
- > for use in confined and difficult to access work areas
- > also for use in conduit and distribution boxes
- > body: plastic, fibreglass-reinforced



16 90 130 SB
MM

| Article No. | EAN 4003773- | ↔ mm | | Stripping capacities | | Types of cables | ⚖ g |
|--------------|-----------------|---------|----|----------------------|-----------------|---|--------|
| | | | | Ø mm | mm ² | | |
| 16 90 130 SB | 076940 | 130 | MM | 8.0 - 13.0 | 1.5 + 2.5 | round cable, e.g. 3 x 1.5 mm ² up to 5 x 2.5 mm ² | 47 |

KNIPEX ErgoStrip® Universal Dismantling Tool


16
95

NEW

For the fast and precise dismantling and stripping of all common round and damp-proof installation cables (e.g. NYM cable 3 x 1.5 mm² up to 5 x 2,5 mm²), data cable (e.g. twisted pair) and coax cable

Innovative, ergonomic pistol grip design for easy cutting, stripping and longitudinal cut of the sheath

- > conical, slimmed down tool ends for better access in confined areas
- > stripping device for cross-sections 0.2 / 0.3 / 0.8 / 1.5 / 2.5 and 4 mm²
- > simplified insertion of single wires for stripping using location ridges
- > with opening spring and locking device
- > easy insertion of coax and data cable thanks to opening aid
- > multi-component design with a soft plastic zone for comfortable use and a secure grip
- > housing made from stable plastic fibreglass-reinforced

16 95 01 SB
PAT. PEND.

GERMAN
DESIGN
AWARD
WINNER
2017


ErgoStrip®



Dismantling of a NYM cable



With concealed cutter in overhanging thumb rest for convenient lengthwise cut

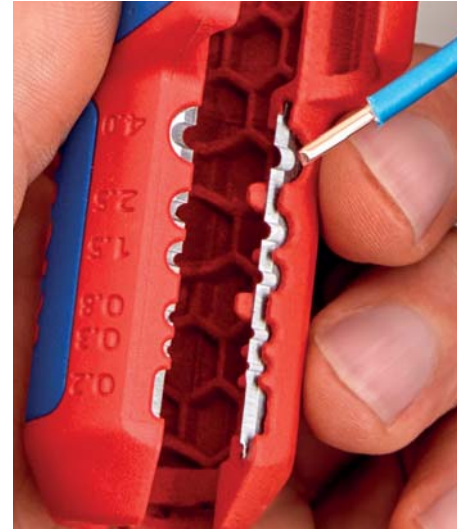

Stripping of single conductors



Dismantling of a data cable



Dismantling of a coax cable



Stripping of a coax cable

Product video



| Article No. | EAN 4003773- 079927 | ↔ mm | ↔ mm | Stripping capacities | | | ⚖ g | |
|--------------------|---------------------------|---------|---------|----------------------|---|-----------------------------------|-----------|---------------------|
| | | | | Round cables Ø mm | Conductors and strands mm ² | Data cables | | Coax-cables Ø mm |
| 16 95 01 SB | | 135 | MM | 8 - 13 | 0.2 - 4 | CAT 5 - 7, Twisted-Pair (UTP/STP) | 4.8 - 7.5 | 95 |



Gripping and Grip Pliers

| | |
|---|----|
| Flat Nose Pliers | 60 |
| Round Nose Pliers | 61 |
| Long Reach Needle Nose Pliers | 61 |
| Long Reach Needle Nose Pliers with transverse profiles | 62 |
| Telephone Pliers | 63 |
| Gripping Pliers (Needle Nose Pliers) | 63 |
| Long Nose Pliers | 64 |
| Relay Adjusting Pliers | 65 |
| Duckbill Pliers | 65 |
| Gripping Pliers for precision mechanics | 66 |
| Mechanics' Pliers | 67 |
| Universal Grip Pliers | 68 |
| Welding Grip Pliers | 68 |
| Grip Pliers | 69 |




Flat Nose Pliers


DIN ISO 5745

20


- > flat, short, wide jaws
- > knurled gripping surfaces
- > Special tool steel, forged, oil-hardened

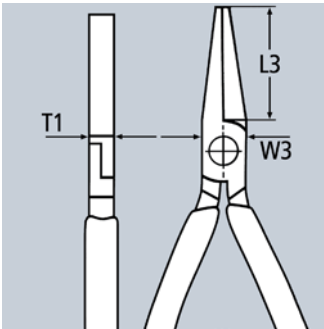


20 01 160



20 02 160



20 05 160



20 06 160




| Article-No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Dimensions | | | ⚖ g |
|-------------|-----------------|---------|--|-----------------------|----------|--|------------|----------|----------|--------|
| | | | | | | | L3 mm | W3 mm | T1 mm | |
| 20 01 125 | 014447 | 125 | | | | | 27.0 | 14.5 | 8.0 | 75 |
| 20 01 140 | 014454 | 140 | | black atramentized | polished | plastic coated | 28.0 | 15.5 | 9.5 | 107 |
| 20 01 160 | 015017 | 160 | | black atramentized | polished | plastic coated | 30.0 | 17.0 | 9.5 | 144 |
| 20 01 180 | 015666 | 180 | | | | | 35.0 | 19.0 | 10.0 | 188 |
| 20 02 140 | 043386 | 140 | | black atramentized | polished | with multi-component grips | 28.0 | 15.5 | 9.5 | 137 |
| 20 02 160 | 035008 | 160 | | black atramentized | polished | with multi-component grips | 30.0 | 17.0 | 9.5 | 172 |
| 20 05 140 | 042464 | 140 | | chrome plated | | with multi-component grips | 28.0 | 15.5 | 9.5 | 136 |
| 20 05 160 | 042457 | 160 | | chrome plated | | with multi-component grips | 30.0 | 17.0 | 9.5 | 176 |
| 20 06 160 | 033783 | 160 | | chrome plated | | insulated with multi-component grips, VDE-tested | 30.0 | 17.0 | 9.5 | 176 |

Round Nose Pliers

DIN ISO 5745

22

- > for bending wire loops
- > round, short jaws; finely ground
- > Special tool steel, forged, oil-hardened

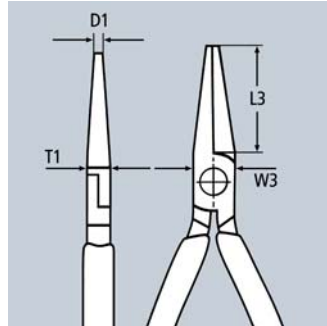22 01 160
8 22 02 160
8 22 06 160


| Article-No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Dimensions | | | | |
|-------------|-----------------|---------|--|-----------------------|----------|--|------------|----------|----------|----------|-------|
| | | | | | | | L3 mm | W3 mm | D1 mm | T1 mm | g |
| 22 01 125 | 014461 | 125 | | Pliers | | | 27.0 | 14.5 | 2.0 | 8.0 | 75 |
| 22 01 140 | 013013 | 140 | | black atramentized | polished | plastic coated | 28.0 | 16.5 | 2.5 | 9.5 | 100 |
| 22 01 160 | 015024 | 160 | | black atramentized | polished | plastic coated | 30.0 | 18.0 | 3.0 | 9.5 | 140 |
| 22 02 140 | 043430 | 140 | | black atramentized | polished | with multi-component grips | 28.0 | 16.5 | 2.5 | 9.5 | 129 |
| 22 02 160 | 023173 | 160 | | black atramentized | polished | with multi-component grips | 30.0 | 18.0 | 3.0 | 9.5 | 170 |
| 22 05 140 | 042891 | 140 | | chrome plated | | with multi-component grips | 28.0 | 16.5 | 2.5 | 9.5 | 127 |
| 22 05 160 | 077275 | 160 | | chrome plated | | with multi-component grips | 30.0 | 18.0 | 3.0 | 9.5 | 169 |
| 22 06 160 | 033790 | 160 | | chrome plated | | insulated with multi-component grips, VDE-tested | 30.0 | 18.0 | 3.0 | 9.5 | 175 |

Long Reach Needle Nose Pliers

DIN ISO 5743

28

- > specially suitable for gripping and assembly work with a higher prehensile power
- > knurled gripping surfaces
- > High-grade special tool steel, forged, oil-hardened

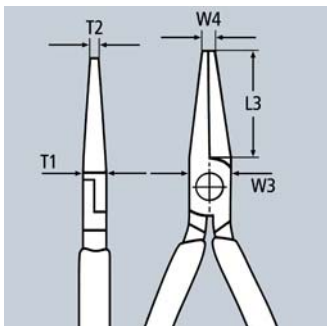28 01 200
28 21 200

| Article-No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Dimensions | | | | | |
|-------------|-----------------|---------|--|--------------------|----------|----------------|------------|----------|----------|----------|----------|-------|
| | | | | | | | L3 mm | W3 mm | T1 mm | W4 mm | T2 mm | g |
| 28 01 200 | 044468 | 200 | | black atramentized | polished | plastic coated | 33.0 | 13.5 | 10.5 | 4.0 | 10.5 | 197 |
| 28 21 200 | 028246 | 200 | | black atramentized | polished | plastic coated | 34.0 | 13.5 | 10.5 | 3.0 | 3.0 | 187 |

Long Reach Needle Nose Pliers

with transverse profiles

DIN ISO 9745

28

Long assembly pliers with wave profile

For gripping, adjustment and assembly work in hard to reach areas thanks to slim, very long design

Deep parts can be easily reached using the slim, half-round tips




- > careful yet reliable gripping, holding and guiding of small copper pipes, screws and cables as well as other round parts thanks to milled grooves with smooth surfaces
- > serrated pipe grip to grip round parts
- > particularly suitable for work in the automotive trade and in mechanical engineering
- > slim yet robust tool
- > forged from special tool steel, oil-hardened and tempered



28 71 280



28 81 280
 $\angle 45^\circ$

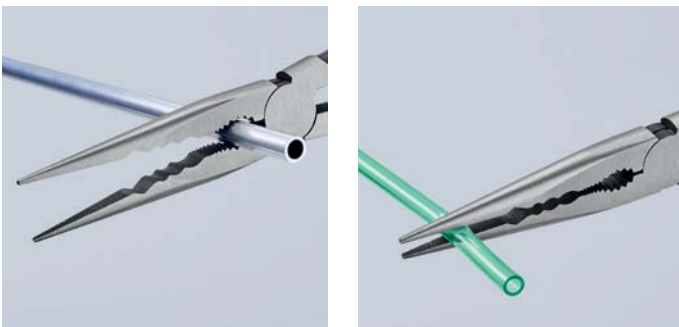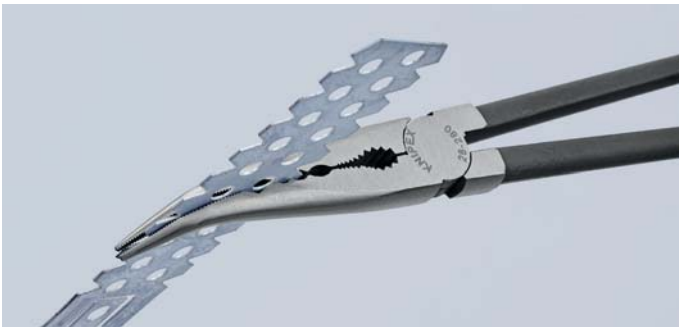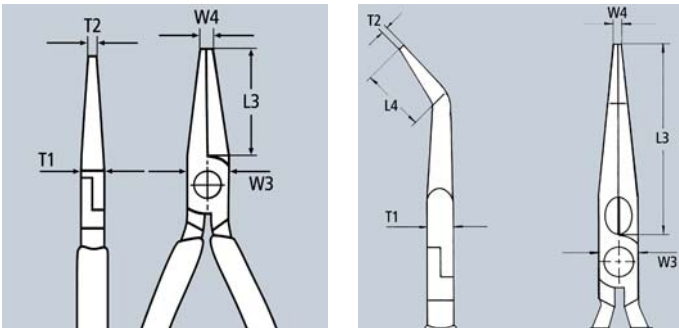

Wave-shaped gripping profile: transverse profile for gripping, holding and guiding

| Article-No. | EAN | ↔ mm | | Pliers | Head | Handles | Dimensions | | | | | g | |
|-------------|--------|---------|-------------------|--------------------|----------|----------------|------------|----------|----------|----------|----------|-----|----------|
| | | | | | | | L3 mm | L4 mm | W3 mm | T1 mm | W4 mm | | T2 mm |
| 28 71 280 | 079415 | 280 | | black atramentized | polished | plastic coated | 76.5 | | 20.0 | 9.0 | 3.0 | 2.5 | 235 |
| 28 81 280 | 079422 | 280 | $\angle 45^\circ$ | black atramentized | polished | plastic coated | 70.0 | 20.0 | 20.0 | 9.0 | 2.5 | 2.5 | 235 |

Telephone Pliers


DIN ISO 5745

29

- > gripping surfaces cross-hatched, knurled
- > Chrome vanadium electric steel, forged, oil-hardened

29 21 160 / 29 25 160

extra slim, fine tips; also suitable for soldering work

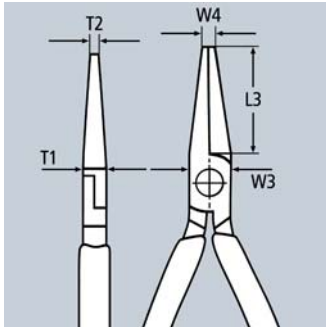

29 11 160



29 25 160



| Article-No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Dimensions | | | | | g |
|-------------|-----------------|---------|--|--------------------|----------|----------------------------|------------|----------|----------|----------|----------|-----|
| | | | | | | | L3 mm | W3 mm | T1 mm | W4 mm | T2 mm | |
| 29 11 160 | 016175 | 160 | | black atramentized | polished | plastic coated | 55.0 | 14.0 | 8.0 | 2.5 | 8.5 | 103 |
| 29 21 160 | 043454 | 160 | | black atramentized | polished | plastic coated | 54.0 | 14.0 | 9.0 | 2.0 | 2.0 | 112 |
| 29 25 160 | 043478 | 160 | | chrome plated | | with multi-component grips | 54.0 | 14.0 | 9.0 | 2.0 | 2.0 | 139 |




Gripping Pliers

(Needle-Nose Pliers)

DIN ISO 5743

31

- > precision pliers for very exact assembly, bending and adjusting work
- > with extra long jaws: length of jaws 55.0 mm
- > smooth ground gripping surfaces
- > edges carefully deburred
- > Chrome vanadium electric steel, forged, oil-hardened

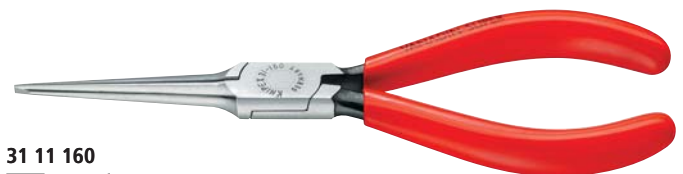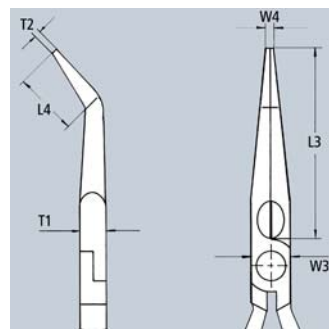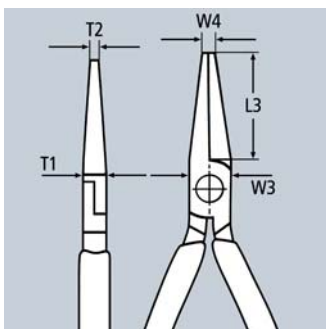

31 11 160



31 25 160



| Article-No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Dimensions | | | | | g | |
|-------------|-----------------|---------|--|--------------------|----------|----------------------------|------------|----------|----------|----------|----------|-----|----------|
| | | | | | | | L3 mm | L4 mm | W3 mm | T1 mm | W4 mm | | T2 mm |
| 31 11 160 | 044475 | 160 | | black atramentized | polished | plastic coated | 55.0 | | 16.0 | 7.5 | 2.0 | 2.5 | 100 |
| 31 15 160 | 016465 | 160 | | chrome plated | | with multi-component grips | 55.0 | | 16.0 | 7.5 | 2.0 | 2.5 | 124 |
| 31 21 160 | 046790 | 160 | | black atramentized | polished | plastic coated | 55.0 | 27.0 | 16.0 | 7.5 | 2.0 | 2.5 | 97 |
| 31 25 160 | 016489 | 160 | | chrome plated | | with multi-component grips | 55.0 | 27.0 | 16.0 | 7.5 | 2.0 | 2.5 | 123 |

Long Nose Pliers

DIN ISO 5745

30

- > heavy-duty and hard-wearing gripping pliers
- > different jaw styles
- > Chrome vanadium electric steel, forged, oil-hardened

Style 1




long, trapezoidal jaws; knurled gripping surfaces

Style 2

long, half-round jaws; knurled gripping surfaces

Style 3

long, round jaws; smooth gripping surfaces

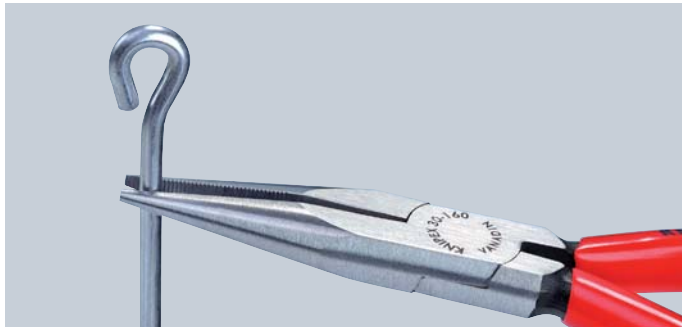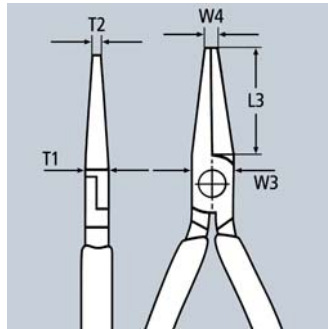

30 11 160



30 25 160



30 36 160


| Article-No. | EAN | ↔ mm | Style | Pliers | Head | Handles | Dimensions | | | | | ⚖ g | |
|-------------|--------|------|--------------|--------|--------------------|----------|--|-------|-------|-------|-------|-----|-----|
| | | | | | | | L3 mm | W3 mm | T1 mm | W4 mm | T2 mm | | |
| 30 11 140 | 033936 | 140 | | | | | 42.0 | 15.0 | 8.0 | 2.5 | 4.0 | 86 | |
| 30 11 160 | 023128 | 160 | | 1 | black atramentized | polished | plastic coated | 46.5 | 16.5 | 9.5 | 3.0 | 5.0 | 121 |
| 30 11 190 | 013051 | 190 | | | | | | 50.0 | 18.5 | 9.5 | 3.0 | 7.0 | 140 |
| 30 13 140 | 016298 | 140 | | 1 | chrome plated | | plastic coated | 42.0 | 15.0 | 8.0 | 2.5 | 4.0 | 87 |
| 30 13 160 | 043485 | 160 | | | | | | 46.5 | 16.5 | 9.5 | 3.0 | 5.0 | 118 |
| 30 15 140 | 042914 | 140 | | | | | | 42.0 | 15.0 | 8.0 | 2.5 | 4.0 | 106 |
| 30 15 160 | 035046 | 160 | | 1 | chrome plated | | with multi-component grips | 46.5 | 16.5 | 9.5 | 3.0 | 5.0 | 149 |
| 30 15 190 | 001881 | 190 | | | | | | 50.0 | 18.5 | 8.0 | 3.0 | 7.0 | 171 |
| 30 16 160 | 001904 | 160 | | 1 | chrome plated | | insulated with multi-component grips, VDE-tested | 46.5 | 16.5 | 9.5 | 3.0 | 5.0 | 150 |
| 30 21 140 | 042433 | 140 | | | | | | 42.0 | 15.0 | 8.0 | 2.5 | 2.0 | 95 |
| 30 21 160 | 035053 | 160 | | 2 | black atramentized | polished | plastic coated | 50.0 | 16.5 | 9.5 | 3.0 | 2.5 | 121 |
| 30 21 190 | 016366 | 190 | | | | | | 50.0 | 18.5 | 8.0 | 3.0 | 2.4 | 135 |
| 30 23 140 | 016373 | 140 | | 2 | chrome plated | | plastic coated | 42.0 | 15.0 | 8.0 | 2.5 | 2.0 | 95 |
| 30 25 140 | 001980 | 140 | | | | | | 42.0 | 15.0 | 8.0 | 2.5 | 2.0 | 114 |
| 30 25 160 | 035060 | 160 | | 2 | chrome plated | | with multi-component grips | 50.0 | 16.5 | 9.5 | 3.0 | 2.5 | 151 |
| 30 25 190 | 043515 | 190 | | | | | | 50.0 | 18.5 | 8.0 | 3.0 | 2.4 | 168 |
| 30 31 160 | 035077 | 160 | | 3 | black atramentized | polished | plastic coated | 41.0 | 16.5 | 9.5 | 5.0 | 2.5 | 110 |
| 30 33 160 | 043539 | 160 | | 3 | chrome plated | | plastic coated | 41.0 | 16.5 | 9.5 | 5.0 | 2.5 | 111 |
| 30 35 140 | 043102 | 140 | | | | | | 37.5 | 15.0 | 8.0 | 4.0 | 2.0 | 102 |
| 30 35 160 | 035084 | 160 | | 3 | chrome plated | | with multi-component grips | 41.0 | 16.5 | 9.5 | 5.0 | 2.5 | 138 |
| 30 36 160 | 002123 | 160 | | 3 | chrome plated | | insulated with multi-component grips, VDE-tested | 41.0 | 16.5 | 9.5 | 5.0 | 2.5 | 141 |

Relay Adjusting Pliers

DIN ISO 5743

32

- > for gripping components and wires of the smallest diameters and for bending contact and relay springs
- > polished gripping surfaces
- > edges carefully deburred
- > High-grade special tool steel, forged, oil-hardened

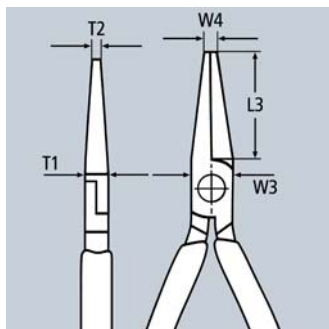

32 11 135



32 21 135

32 31 135
∠40°



| Article-No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Dimensions | | | | | g |
|-------------|-----------------|---------|--------------------|----------|----------------|------------|----------|----------|----------|----------|----|
| | | | | | | L3 mm | W3 mm | T1 mm | W4 mm | T2 mm | |
| 32 11 135 | 035091 | 135 | black atramentized | polished | plastic coated | 34.0 | 12.5 | 7.0 | 1.4 | 1.5 | 73 |
| 32 21 135 | 043553 | 135 | black atramentized | polished | plastic coated | 34.0 | 12.5 | 7.0 | 1.4 | 3.5 | 74 |
| 32 31 135 | 043560 | 135 | black atramentized | polished | plastic coated | 32.0 | 12.5 | 7.0 | 1.4 | 3.5 | 73 |

Duckbill Pliers

DIN ISO 5743

33

- > duckbill shaped jaws 9.0 mm wide at the tip and tapering to 1.5 mm thickness
- > smooth gripping surfaces
- > Chrome vanadium electric steel, forged, oil-hardened

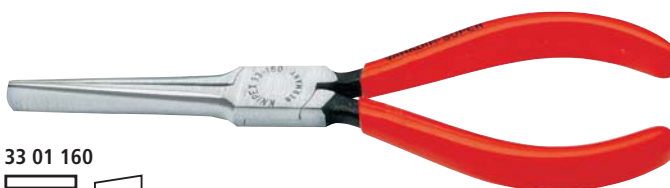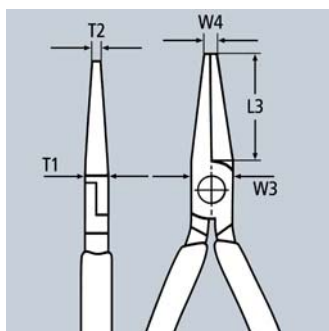

33 01 160



33 03 160

| Article-No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Dimensions | | | | | g |
|-------------|-----------------|---------|--------------------|----------|----------------|------------|----------|----------|----------|----------|-----|
| | | | | | | L3 mm | W3 mm | T1 mm | W4 mm | T2 mm | |
| 33 01 160 | 016663 | 160 | black atramentized | polished | plastic coated | 55.0 | 15.0 | 7.5 | 3.0 | 9.0 | 103 |
| 33 03 160 | 016670 | 160 | chrome plated | | plastic coated | 55.0 | 15.0 | 7.5 | 3.0 | 9.0 | 103 |

Gripping Pliers

for precision mechanics

DIN ISO 9655

37

- > precision pliers for fine assembly work, e.g. in electronics and fine mechanics
- > for gripping, holding, bending and adjusting
- > tips precision ground
- > smooth gripping surfaces
- > edges carefully deburred
- > lap joint
- > Chrome vanadium electric steel, forged, oil-hardened

Style 1

flat, wide jaws

Style 2


flat, concave and pointed jaws

Style 3


half-round jaws

Style 4

round, pointed jaws to bend wire loops

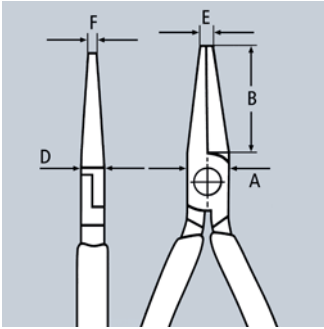

37 11 125



37 21 125



37 31 125



37 41 125



| Article-No. | EAN 4003773- | ↔ mm | Style | Pliers | Head | Handles | Dimensions | | | | | ⚖ g | |
|-------------|-----------------|---------|-------|--------|--------------------|----------|----------------|---------|---------|---------|---------|--------|----|
| | | | | | | | B mm | A mm | D mm | E mm | F mm | | |
| 37 11 125 | 014287 | 125 | | 1 | black atramentized | polished | plastic coated | 27.0 | 12.5 | 7.0 | 2.0 | 5.5 | 76 |
| 37 13 125 | 043638 | 125 | | 1 | chrome plated | | plastic coated | 27.0 | 12.5 | 7.0 | 2.0 | 5.5 | 71 |
| 37 21 125 | 035138 | 125 | | 2 | black atramentized | polished | plastic coated | 27.0 | 12.5 | 7.0 | 2.0 | 2.0 | 74 |
| 37 23 125 | 043645 | 125 | | 2 | chrome plated | | plastic coated | 27.0 | 12.5 | 7.0 | 2.0 | 2.0 | 72 |
| 37 31 125 | 035145 | 125 | | 3 | black atramentized | polished | plastic coated | 27.0 | 12.5 | 7.0 | 2.0 | 1.6 | 74 |
| 37 33 125 | 016960 | 125 | | 3 | chrome plated | | plastic coated | 27.0 | 12.0 | 7.0 | 2.0 | 1.6 | 78 |
| 37 41 125 | 035152 | 125 | | 4 | black atramentized | polished | plastic coated | 27.0 | 14.5 | 8.0 | 2.0 | 1.0 | 76 |
| 37 43 125 | 043652 | 125 | | 4 | chrome plated | | plastic coated | 27.0 | 14.5 | 8.0 | 2.0 | 1.0 | 76 |

Mechanics' Pliers

DIN ISO 5745

38

- > high bending strength of the pliers tips
- > gripping surfaces cross-hatched, knurled
- > Vanadium electric steel; forged, oil-hardened

38 71 200

70° angled, half-round jaws, suitable for pulling split pins; for gripping at points that are difficult to access

38 91 200 / 38 95 200




45° angled, half-round, long jaws, also suitable for gripping spark plugs and round components (spark plug cover "grabber")

Style 2

40° angled jaws


Style 3

curved tips

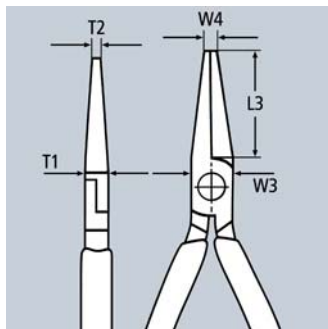

38 11 200




38 15 200





38 21 200
 $\sphericalangle 40^\circ$ 



38 31 200

















38 41 190




38 71 200
 $\sphericalangle 70^\circ$ 



38 91 200
 $\sphericalangle 45^\circ$ 

| Article-No. | EAN 4003773- | ↔ mm |  | Pliers | Head | Handles | Dimensions | | | | | \triangle g |
|------------------|-----------------|---------|--|--------------------|----------|----------------------------|------------|----------|----------|----------|----------|------------------|
| | | | | | | | L3 mm | W3 mm | T1 mm | W4 mm | T2 mm | |
| 38 11 200 | 035169 | 200 |  | black atramentized | polished | plastic coated | 73.0 | 17.5 | 9.5 | 3.0 | 2.5 | 179 |
| 38 15 200 | 039594 | 200 |  | chrome plated | | with multi-component grips | 73.0 | 17.5 | 9.5 | 3.0 | 2.5 | 209 |
| 38 21 200 | 035176 | 200 | $\sphericalangle 40^\circ$  | black atramentized | polished | plastic coated | 73.0 | 17.5 | 9.5 | 3.0 | 2.5 | 175 |
| 38 25 200 | 043669 | 200 | $\sphericalangle 40^\circ$  | chrome plated | | with multi-component grips | 73.0 | 17.5 | 9.5 | 3.0 | 2.5 | 209 |
| 38 31 200 | 040712 | 200 |  | black atramentized | polished | plastic coated | 73.0 | 17.5 | 9.5 | 3.0 | 2.5 | 176 |
| 38 35 200 | 017134 | 200 |  | chrome plated | | with multi-component grips | 73.0 | 17.5 | 9.5 | 3.0 | 2.5 | 205 |
| 38 41 190 | 017141 | 190 |  | black atramentized | polished | plastic coated | 50.0 | 18.0 | 8.0 | 2.0 | 8.0 | 139 |
| 38 45 190 | 043676 | 190 |  | chrome plated | | with multi-component grips | 50.0 | 18.0 | 8.0 | 2.0 | 8.0 | 171 |
| 38 71 200 | 017202 | 200 | $\sphericalangle 70^\circ$  | black atramentized | polished | plastic coated | 73.0 | 17.5 | 9.5 | 3.0 | 2.0 | 174 |
| 38 91 200 | 017219 | 200 | $\sphericalangle 45^\circ$  | black atramentized | polished | plastic coated | 73.0 | 17.5 | 9.5 | | 2.5 | 177 |
| 38 95 200 | 017233 | 200 | $\sphericalangle 45^\circ$  | chrome plated | | with multi-component grips | 73.0 | 17.5 | 9.5 | | 2.5 | 207 |

Universal Grip Pliers

40

- > hold round, profile and flat material securely
- > heavy duty model
- > with adjustment screw and release lever
- > one-hand operation
- > high clamping pressure due to toggle lever action
- > pliers body: rolled steel, high-strength
- > gripping jaws: chrome vanadium electric steel, forged

40 14 250
with one pivoting jaw



40 04 250



40 14 250

| Article No. | EAN 4003773- | ↔ mm | | Pliers | | | | |
|------------------|--------------|------|--|--------------------|----|----|----|-----|
| 40 04 180 | 022190 | 180 | | bright zinc plated | 35 | 25 | 32 | 310 |
| 40 04 250 | 002710 | 250 | | bright zinc plated | 35 | 30 | 32 | 521 |
| 40 14 250 | 080329 | 250 | | bright zinc plated | 43 | 42 | 45 | 600 |


Welding Grip Pliers

42


- > for gripping, clamping and holding of diverse profiles
- > heavy duty model
- > with adjustment screw and release lever
- > one-hand operation
- > high clamping pressure due to toggle lever action
- > pliers body: rolled steel, high-strength



42 14 280
heat resistant malleable cast iron jaws; section or flat material items lying side by side are held in place during welding; also for section material with vertical webs up to 25 mm height

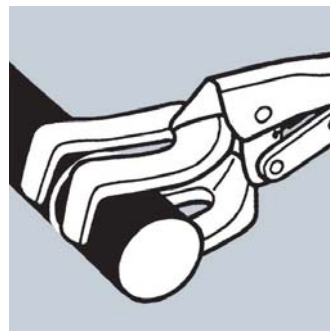

42 24 280
heat resistant malleable cast iron jaws; round or tubular material items lying centrally side by side are held securely during welding

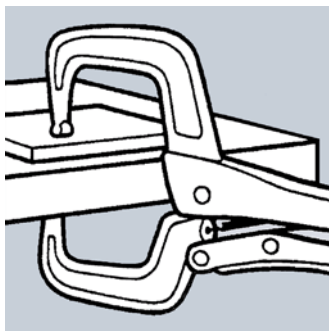

42 34 280
gripping jaws of chrome vanadium steel, drop forged; clamps cumbersome workpieces and sections with high webs up to 40 mm

42 44 280
moveable jaws; gripping jaws of chrome vanadium steel, drop forged; Clamps and balances bulky work components and profiles with high ridges of up to 40 mm

| Article No. | EAN 4003773- | ↔ mm | Pliers | | | |
|------------------|--------------|------|--------------------|---------|----|-----|
| 42 14 280 | 022206 | 280 | bright zinc plated | 30 - 65 | 50 | 917 |
| 42 24 280 | 022213 | 280 | bright zinc plated | 10 - 70 | | 850 |
| 42 34 280 | 022220 | 280 | bright zinc plated | | 90 | 692 |
| 42 44 280 | 080350 | 280 | bright zinc plated | | 90 | 740 |



42 14 280



42 24 280



42 34 280



42 44 280

Grip Pliers

41

- > hold round, profile and flat material securely
- > heavy duty model
- > with adjustment screw and release lever
- > one-hand operation
- > high clamping pressure due to toggle lever action
- > pliers body: rolled steel, high-strength
- > gripping jaws: chrome vanadium electric steel, forged

Style 0

jaws for round workpieces, with wire cutter

Style 1

jaws with double prism for round, section and flat material

Style 2



straight jaws for flat material

Style 3

Long-Nose Grip Pliers, narrow, long jaws

Style 4

Long-Nose Grip Pliers, narrow, long jaws; Very suitable for areas that are difficult to reach; Non-serrated gripping area for pinching off hoses

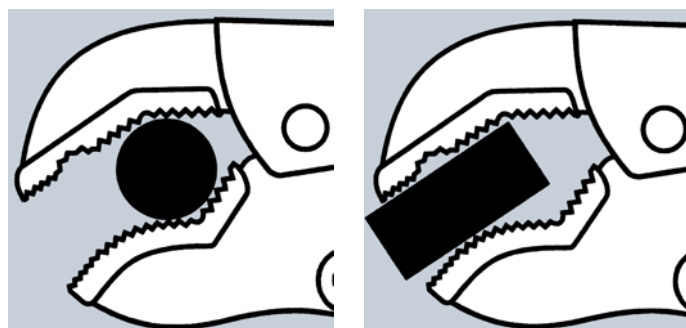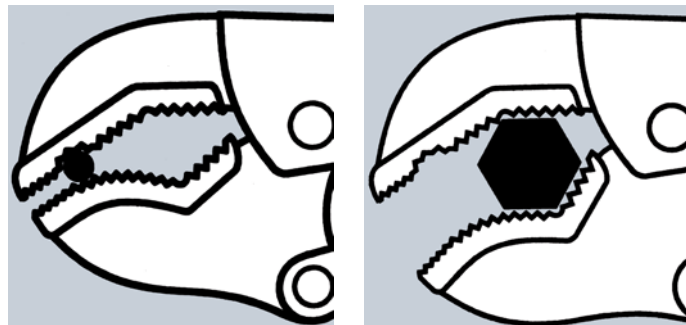

41 04 250



41 14 250




41 24 225



41 34 165



41 44 200




| Article-No. | EAN 4003773- | ↔ mm | | Style | Pliers | ○ mm | □ mm | ⬡ mm | ⚖ g |
|-------------|-----------------|---------|--|-------|--------------------|---------|---------|---------|--------|
| 41 04 180 | 002741 | 180 | | | | 30 | 20 | 30 | 363 |
| 41 04 250 | 002758 | 250 | | 0 | bright zinc plated | 40 | 20 | 30 | 517 |
| 41 04 300 | 022183 | 300 | | | | 65 | 30 | 34 | 923 |
| 41 14 250 | 023470 | 250 | | 1 | bright zinc plated | 36 | 36 | 36 | 557 |
| 41 24 225 | 023487 | 225 | | 2 | bright zinc plated | 25 | 16 | 30 | 504 |
| 41 34 165 | 047858 | 165 | | 3 | bright zinc plated | 20 | 10 | 24 | 189 |
| 41 44 200 | 080343 | 200 | | 4 | bright zinc plated | 20 | 20 | 30 | 400 |

Circlip Pliers



| | |
|--|----------|
| Circlip Pliers to assemble internal circlips into bores | 72 |
| Circlip Pliers to assemble external circlips on shafts | 73 |
| Precision Circlip Pliers to assemble internal circlips into bores – with overstretching limiter | 74 75 |
| Precision Circlip Pliers to assemble external circlips on shafts – with overstretching limiter | 76 77 |
| Circlip Pliers for large internal circlips up to 400 mm | 78 |
| Circlip Pliers for large external circlips up to 400 mm | 78 |
| Circlip Tool for circlips up to 1000 mm | 79 |
| Special Retaining Ring Pliers for retaining rings on shafts | 80 |
| Circlip Pliers for grip rings on shafts | 80 |
| Sets of Circlip Pliers | 81 |
| Pliers Sets in a foam tray | 81 |
| Precision Circlip Pliers Sets | 82 |

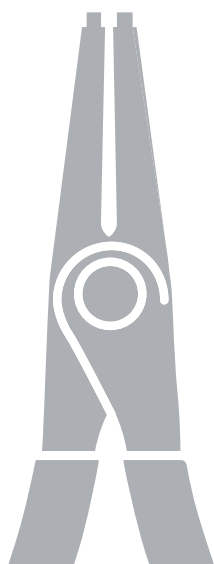

Circlip Pliers

to assemble internal circlips into bores

44

- > for fitting circlips into bores, range of application from 8 - 140 mm dia.
- > solid style, forged
- > non-slip, solid tips
- > pliers body and tips: chrome vanadium steel, forged, oil-hardened



44 11 J2



44 21 J21
90°



44 31 J22
45°

- Style 1**
DIN 5256 C, straight tips
- Style 2**
DIN 5256 D; 90° angled tips
- Style 3**
45° angled tips

| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Head | Handles | Size of bore Ø mm | Tips Ø mm | ⚖ g |
|-------------|--------------|------|-------|-------|--------------------|----------------|----------------|-------------------|-----------|-----|
| 44 11 J0 | 040286 | 140 | ☉ | 1 | black atramentized | polished | plastic coated | 8 - 13 | 0.9 | 88 |
| 44 11 J1 | 022862 | 140 | | | | | | 12 - 25 | 1.3 | 88 |
| 44 11 J2 | 022879 | 180 | | | | | | 19 - 60 | 1.8 | 135 |
| 44 11 J3 | 033943 | 225 | | | | | | 40 - 100 | 2.3 | 196 |
| 44 11 J4 | 042549 | 320 | | | | | | 85 - 140 | 3.2 | 469 |
| 44 13 J0 | 048176 | 140 | ☉ | 1 | chrome plated | plastic coated | 8 - 13 | 0.9 | 89 | |
| 44 13 J1 | 042938 | 140 | | | | | 12 - 25 | 1.3 | 88 | |
| 44 13 J2 | 042945 | 180 | | | | | 19 - 60 | 1.8 | 138 | |
| 44 13 J3 | 042952 | 225 | | | | | 40 - 100 | 2.3 | 194 | |
| 44 13 J4 | 017301 | 320 | | | | | 85 - 140 | 3.2 | 463 | |
| 44 21 J01 | 040132 | 130 | ☉ 90° | 2 | black atramentized | polished | plastic coated | 8 - 13 | 0.9 | 88 |
| 44 21 J11 | 022886 | 130 | | | | | | 12 - 25 | 1.3 | 88 |
| 44 21 J21 | 022893 | 170 | | | | | | 19 - 60 | 1.8 | 139 |
| 44 21 J31 | 033769 | 215 | | | | | | 40 - 100 | 2.3 | 196 |
| 44 21 J41 | 043683 | 300 | | | | | | 85 - 140 | 3.2 | 462 |
| 44 23 J11 | 042969 | 130 | ☉ 90° | 2 | chrome plated | plastic coated | 12 - 25 | 1.3 | 89 | |
| 44 23 J21 | 042976 | 170 | | | | | 19 - 60 | 1.8 | 138 | |
| 44 23 J31 | 042983 | 215 | | | | | 40 - 100 | 2.3 | 200 | |
| 44 31 J02 | 066941 | 140 | ☉ 45° | 3 | black atramentized | polished | plastic coated | 8 - 13 | 0.9 | 90 |
| 44 31 J12 | 066958 | 140 | | | | | | 12 - 25 | 1.3 | 90 |
| 44 31 J22 | 066965 | 180 | | | | | | 19 - 60 | 1.8 | 140 |
| 44 31 J32 | 066972 | 225 | | | | | | 40 - 100 | 2.3 | 195 |
| 44 31 J42 | 066989 | 310 | | | | | | 85 - 140 | 3.2 | 465 |

Circlip Pliers

to assemble external circlips on shafts

46

- > for fitting circlips on shafts, range of application from 3 - 140 mm dia.
- > solid style, forged
- > non-slip, solid tips
- > pliers body and tips: chrome vanadium steel, forged, oil-hardened



46 11 A2
 MM



46 21 A21
 MM



46 31 A22
 MM

- Style 1**
DIN 5254 A; straight tips
- Style 2**
DIN 5254 B; 90° angled tips
- Style 3**
45° angled tips

| Article No. | EAN | ↔ mm | | Style | Pliers | Head | Handles | Size of shaft Ø mm | Tips Ø mm | ⚖ g |
|-------------|--------|---------|-----------|-------|--------------------|----------|----------------|-----------------------|--------------|--------------------|
| 46 11 A0 | 033950 | 140 | ○ MM | 1 | black atramentized | polished | plastic coated | 3 - 10 | 0.9 | 85 |
| 46 11 A1 | 022909 | 140 | | | | | | 10 - 25 | 1.3 | 86 |
| 46 11 A2 | 022916 | 180 | | | | | | 19 - 60 | 1.8 | 134 |
| 46 11 A3 | 033974 | 210 | | | | | | 40 - 100 | 2.3 | 220 |
| 46 11 A4 | 042532 | 320 | | | | | | 85 - 140 | 3.2 | 505 |
| 46 13 A0 | 017417 | 140 | ○ MM | 1 | chrome plated | | plastic coated | 3 - 10 | 0.9 | 85 |
| 46 13 A1 | 042990 | 140 | | | | | | 10 - 25 | 1.3 | 82 |
| 46 13 A2 | 043003 | 180 | | | | | | 19 - 60 | 1.8 | 133 |
| 46 13 A3 | 043010 | 210 | | | | | | 40 - 100 | 2.3 | 211 |
| 46 21 A01 | 033967 | 125 | | | | | | ○ ∠90° MM | 2 | black atramentized |
| 46 21 A11 | 023005 | 125 | 10 - 25 | 1.3 | 85 | | | | | |
| 46 21 A21 | 022923 | 170 | 19 - 60 | 1.8 | 132 | | | | | |
| 46 21 A31 | 033981 | 200 | 40 - 100 | 2.3 | 219 | | | | | |
| 46 21 A41 | 039365 | 300 | 85 - 140 | 3.2 | 510 | | | | | |
| 46 23 A01 | 017509 | 125 | ○ ∠90° MM | 2 | chrome plated | | plastic coated | 3 - 10 | 0.9 | 84 |
| 46 23 A11 | 043027 | 125 | | | | | | 10 - 25 | 1.3 | 84 |
| 46 23 A21 | 043034 | 170 | | | | | | 19 - 60 | 1.8 | 132 |
| 46 23 A31 | 043041 | 200 | | | | | | 40 - 100 | 2.3 | 221 |
| 46 31 A02 | 066996 | 130 | | | | | | ○ ∠45° MM | 3 | black atramentized |
| 46 31 A12 | 067009 | 130 | 10 - 25 | 1.3 | 85 | | | | | |
| 46 31 A22 | 067016 | 185 | 19 - 60 | 1.8 | 133 | | | | | |
| 46 31 A32 | 067023 | 210 | 40 - 100 | 2.3 | 213 | | | | | |
| 46 31 A42 | 067030 | 310 | 85 - 140 | 3.2 | 511 | | | | | |

Precision Circlip Pliers

to assemble internal circlips into bores

DIN 5256

48

With inserted tips for reliable work

Heavy duty in continuous operation: up to 10 times longer service life compared to turned tips

- > bolted joint: precise, zero backlash operation of pliers
- > non-slip plastic coating on the handles
- > pliers body: chrome vanadium electric steel, forged, oil-hardened
- > inserted tips: spring steel wire, drawn

Style 1

DIN 5256 C; straight tips

Style 2

DIN 5256 D; 90° angled tips



48 11 J2



48 21 J21

High precision quality

Easy and reliable assembly: form-fitting inserted and pressed-in tips made of high-density spring steel offer a high level of protection against excessive stress and strain, e.g. when removing stuck rings. The large supporting surfaces and the position of the tips make it more difficult for the rings to bounce off.




Precision and durability

High-density spring steel with a score-free surface is used for the tips. This increases the tips' resistance to dynamic and static strain. The tips are 30% more stable than conventional pliers when subjected to one-off overloading while still allowing good accessibility during assembly. Subjected to dynamic strain, the tips' resistance capacity is up to 10 times greater! The tips on the precision circlip pliers are non-detachable!



Sturdy, inserted tips:
made from high-density spring steel



Tight fit through compression

| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Handles | Size of bore Ø mm | Tips Ø mm | ⚖ g |
|-------------|-----------------|---------|--|-------|-------------------|-------------------------------|----------------------|--------------|--------|
| 48 11 J0 | 048510 | 140 | | 1 | grey atramentized | with non-slip plastic coating | 8 - 13 | 0.9 | 105 |
| 48 11 J1 | 048527 | 140 | | | | | 12 - 25 | 1.3 | 105 |
| 48 11 J2 | 048534 | 180 | | | | | 19 - 60 | 1.8 | 175 |
| 48 11 J3 | 048541 | 225 | | | | | 40 - 100 | 2.3 | 266 |
| 48 11 J4 | 048558 | 320 | | | | | 85 - 140 | 3.2 | 580 |
| 48 21 J01 | 048619 | 130 | | 2 | grey atramentized | with non-slip plastic coating | 8 - 13 | 0.9 | 105 |
| 48 21 J11 | 048633 | 130 | | | | | 12 - 25 | 1.3 | 105 |
| 48 21 J21 | 048640 | 165 | | | | | 19 - 60 | 1.8 | 175 |
| 48 21 J31 | 048657 | 210 | | | | | 40 - 100 | 2.3 | 265 |
| 48 21 J41 | 048664 | 305 | | | | | 85 - 140 | 3.2 | 576 |

Now also with overstretching limiter

For all circlips with a diameter of 8 - 100 mm

- > with overstretching limiter for standardized assembly according to DIN 472
- > the adjustable stop screw prevents overexpansion
- > adjustment using hexagonal screw
- > ideal for series production as excessive expansion of rings is effectively prevented

Style 3

DIN 5256 C, straight tips



Style 4

DIN 5256 D; 90° angled tips



48 31 J2
 







48 41 J21
 $\angle 90^\circ$ 

KNIPEX Precision Circlip Pliers with overexpansion guard

For the standardized fitting of circlips in the industrial serial production. Particularly manufacturers of sensitive, safety-relevant components (e.g. brakes or gears) highly appreciate the compliance of DIN 471 and 472. The mounting of circlip rings in this case requires pliers with overexpansion guard or a cone. KNIPEX Circlip Pliers with overexpansion guard meet the requirements and furthermore offer a superior durability.



| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Handles | Size of shaft Ø mm | Tips Ø mm | ⚖ g |
|-------------|--------------|------|---|-------|-------------------|-------------------------------|--------------------|-----------|-----|
| 48 31 J0 | 079552 | 140 |   | 3 | grey atramentized | with non-slip plastic coating | 8 - 13 | 0.9 | 105 |
| 48 31 J1 | 073864 | 140 | | | | | 12 - 25 | 1.3 | 105 |
| 48 31 J2 | 073871 | 180 | | | | | 19 - 60 | 1.8 | 175 |
| 48 31 J3 | 073888 | 225 | | | | | 40 - 100 | 2,3 | 266 |
| 48 41 J01 | 079569 | 130 |  $\angle 90^\circ$  | 4 | grey atramentized | with non-slip plastic coating | 8 - 13 | 0.9 | 105 |
| 48 41 J11 | 079576 | 130 | | | | | 12 - 25 | 1.3 | 105 |
| 48 41 J21 | 079640 | 165 | | | | | 19 - 60 | 1.8 | 175 |
| 48 41 J31 | 079590 | 210 | | | | | 40 - 100 | 2.3 | 265 |

Precision Circlip Pliers

to assemble external circlips on shafts

DIN 5254

49

With inserted tips for reliable work

Heavy duty in continuous operation: up to 10 times longer service life compared to turned tips

- > large contact faces on the tips: no distortion of circlips, easy fitting
- > bolted joint: precise, zero backlash operation of pliers
- > internal opening spring, protected and captive
- > non-slip plastic coating on the handles
- > pliers body: chrome vanadium electric steel, forged, oil-hardened
- > inserted tips: spring steel wire, drawn



49 11 A2



49 21 A21

Style 1

DIN 5254 A; straight tips

Style 2


DIN 5254 B; 90° angled tips

High precision quality

Easy and reliable assembly: form-fitting inserted and pressed-in tips made of high-density spring steel offer a high level of protection against excessive stress and strain, e.g. when removing stuck rings. The large supporting surfaces and the position of the tips make it more difficult for the rings to bounce off.



Spring inside the joint: the spring is protected inside the precisely bolted joint. It does not hinder work and cannot get dirty or lost




KNIPEX-Precision Circlip Pliers: fit circlips without distortion; easy and quick assembling

Precision and durability

High-density spring steel with a score-free surface is used for the tips. This increases the tips' resistance to dynamic and static strain. The tips are 30 % more stable than conventional pliers when subjected to one-off overloading while still allowing good accessibility during assembly. Subjected to dynamic strain, the tips' resistance capacity is up to 10 times greater! The tips on the precision circlip pliers are non-detachable!



Sturdy, inserted tips: made from high-density spring steel



Tight fit through compression

| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Handles | Size of shaft Ø mm | Tips Ø mm | ⚖ g |
|-------------|--------------|------|--|-------|-------------------|-------------------------------|-----------------------|--------------|--------|
| 49 11 A0 | 048718 | 140 | | 1 | grey atramentized | with non-slip plastic coating | 3 - 10 | 0.9 | 101 |
| 49 11 A1 | 048725 | 140 | | | | | 10 - 25 | 1.3 | 100 |
| 49 11 A2 | 048732 | 180 | | | | | 19 - 60 | 1.8 | 170 |
| 49 11 A3 | 048749 | 225 | | | | | 40 - 100 | 2.3 | 270 |
| 49 11 A4 | 048756 | 320 | | | | | 85 - 140 | 3.2 | 599 |
| 49 21 A01 | 048817 | 130 | | 2 | grey atramentized | with non-slip plastic coating | 3 - 10 | 0.9 | 100 |
| 49 21 A11 | 048824 | 130 | | | | | 10 - 25 | 1.3 | 102 |
| 49 21 A21 | 048831 | 165 | | | | | 19 - 60 | 1.8 | 169 |
| 49 21 A31 | 048848 | 210 | | | | | 40 - 100 | 2.3 | 272 |
| 49 21 A41 | 048855 | 305 | | | | | 85 - 140 | 3.2 | 601 |

Now also with overstretching limiter

For all circlips with a diameter of 8 - 100 mm

- > with overstretching limiter for standardized assembly according to DIN 471
- > the adjustable stop screw prevents overexpansion
- > adjustment using hexagonal screw
- > ideal for series production as excessive expansion of rings is effectively prevented

Style 3

DIN 5254 A; straight tips;

Style 4

DIN 5254 B; 90° angled tips



49 31 A0
  




49 31 A2
  









49 41 A11
 $\angle 90^\circ$  

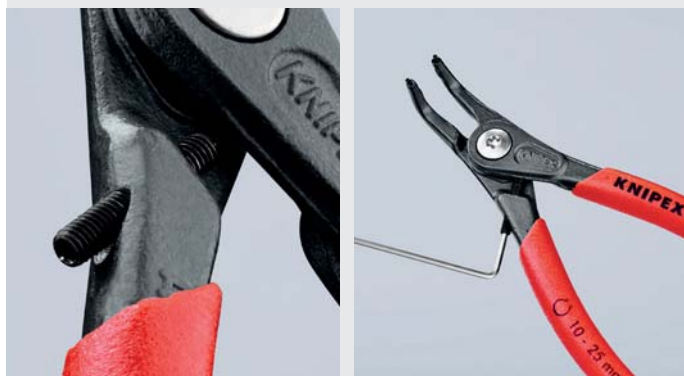KNIPEX Precision Circlip Pliers with overexpansion guard

For the standardized fitting of circlips in the industrial serial production. Particularly manufacturers of sensitive, safety-relevant components (e.g. brakes or gears) highly appreciate the compliance of DIN 471 and 472. The mounting of circlip rings in this case requires pliers with overexpansion guard or a cone. KNIPEX Circlip Pliers with overexpansion guard meet the requirements and furthermore offer a superior durability.



| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Handles | Size of shaft Ø mm | Tips Ø mm | g |
|-------------|--------------|------|---|-------|-------------------|-------------------------------|--------------------|-----------|-----|
| 49 31 A0 | 061748 | 140 |    | 3 | grey atramentized | with non-slip plastic coating | 3 - 10 | 0.9 | 103 |
| 49 31 A1 | 073895 | 140 | | | | | 10 - 25 | 1.3 | 100 |
| 49 31 A2 | 073901 | 180 | | | | | 19 - 60 | 1.8 | 170 |
| 49 31 A3 | 073918 | 225 | | | | | 40 - 100 | 2.3 | 270 |
| 49 41 A01 | 061755 | 130 |  $\angle 90^\circ$   | 4 | grey atramentized | with non-slip plastic coating | 3 - 10 | 0.9 | 102 |
| 49 41 A11 | 079606 | 130 | | | | | 10 - 25 | 1.3 | 102 |
| 49 41 A21 | 079613 | 165 | | | | | 19 - 60 | 1.8 | 169 |
| 49 41 A31 | 079620 | 210 | | | | | 40 - 100 | 2.3 | 272 |

Circlip Pliers

for large internal circlips

44

- > for assembling circlips into bores within the range of Ø 122 - 400 mm
- > with locking device, can be released
- > with replaceable tips made of tempered steel
- > black powder coated
- > pliers body: rolled steel, high-strength
- > tips: special tool steel, oil-hardened

Style 1
DIN 5256 C, straight tips

Style 2
DIN 5256 D; 90° angled tips



44 10 J6



44 20 J61
90°

| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Size of bore Ø mm | Tips Ø mm | ⚖ g |
|-------------|--------------|------------------------------------|-------|-------|---------------------|-------------------|-----------|------|
| 44 10 J5 | 024910 | 570 | ☉ | 1 | black powder-coated | 122 - 300 | 3.5 | 1738 |
| 44 10 J6 | 024927 | 580 | | | | 252 - 400 | 4.5 | 1755 |
| 44 20 J51 | 024958 | 590 | ☉ 90° | 2 | black powder-coated | 122 - 300 | 3.5 | 1803 |
| 44 20 J61 | 024965 | 600 | | | | 252 - 400 | 4.5 | 1723 |
| 44 19 J5 | 024934 | 1 pair of spare tips for 44 10 J5 | | | | | | |
| 44 19 J6 | 024941 | 1 pair of spare tips for 44 10 J6 | | | | | | |
| 44 29 J51 | 024972 | 1 pair of spare tips for 44 20 J51 | | | | | | |
| 44 29 J61 | 024989 | 1 pair of spare tips for 44 20 J61 | | | | | | |

Circlip Pliers

for large external circlips

46

- > for assembling circlips on shafts within the range of Ø 122 - 400 mm
- > with locking device, can be released
- > with replaceable tips made of tempered steel
- > black powder coated
- > pliers body: rolled steel, high-strength
- > tips: special tool steel, oil-hardened

Style 1
DIN 5254 A; straight tips

Style 2
DIN 5254 B; 90° angled tips



46 10 A5



46 20 A61
90°

| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Size of shaft Ø mm | Tips Ø mm | ⚖ g |
|-------------|--------------|------------------------------------|-------|-------|---------------------|--------------------|-----------|------|
| 46 10 A5 | 024996 | 560 | ☉ | 1 | black powder-coated | 122 - 300 | 3.5 | 1773 |
| 46 10 A6 | 025009 | 570 | | | | 252 - 400 | 4.5 | 1795 |
| 46 20 A51 | 025023 | 570 | ☉ 90° | 2 | black powder-coated | 122 - 300 | 3.5 | 1832 |
| 46 20 A61 | 025030 | 580 | | | | 252 - 400 | 4.5 | 1826 |
| 46 19 A5 | 024316 | 1 pair of spare tips for 46 10 A5 | | | | | | |
| 46 19 A6 | 025016 | 1 pair of spare tips for 46 10 A6 | | | | | | |
| 46 29 A51 | 025047 | 1 pair of spare tips for 46 20 A51 | | | | | | |
| 46 29 A61 | 025054 | 1 pair of spare tips for 46 20 A61 | | | | | | |

Circlip Tool

for large internal and external circlips up to 1000 mm

46

- > universally usable for large circlips with diameters of 400 - 1000 mm
- > reliable opening and closing of the circlips and holding by self-locking precision spindle drive
- > for fitting and removing circlips
- > circlips are reliably caught thanks to short, direct attachment
- > replaceable tips having working ends with diameters of 6 and 9 mm, for perfect adaption to the handling bores in the circlips
- > optional operation by hand, with Allen key, ratchet wrench or cordless screwdriver
- > areas of application are heavy engines where very high forces and torques are transmitted with large shafts and bearings, e.g. wind turbines, tidal power stations, generator construction, hydropower stations, large machine construction (rolling mills, presses), shipbuilding, aerospace
- > tool in a plastic case with foam insert
- > tip material: chrome-vanadium electric steel



46 10 100



Manually operable



Machine operable



Replaceable inserts for internal and external circlips



| Article No. | EAN | | Size of bore Ø mm | Size of shaft Ø mm | g |
|-------------|--------|-----|----------------------|-----------------------|------|
| 46 10 100 | 075417 | ⊙ ⊙ | 400 - 1000 | 400 - 1000 | 2200 |

Special Retaining Ring Pliers

for retaining rings on shafts

DIN ISO 5743

45

> for fitting horseshoe-shaped spring retaining rings and circlips without grip holes

> for shaft retaining devices

> with opening spring

> Chrome vanadium electric steel, forged, oil-hardened



45 10 170
 MM



45 21 200
 $\angle 30^\circ$ MM

45 10 170

for retaining rings with a minimum ring split gap of 3.6 mm

45 21 200

angled jaws with centering hole; for snap rings larger than 12.0 mm dia., e.g. for securing cardan shafts in a motor vehicle; minimum ring split gap of the rings 2.2 mm



45 10 170



45 21 200



45 21 200

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | ⚖ g |
|-------------|--------------|------|----------------------|-----------|----------------|-----|
| 45 10 170 | 017370 | 170 | MM | burnished | | 156 |
| 45 21 200 | 031208 | 200 | $\angle 30^\circ$ MM | burnished | plastic coated | 186 |

Circlip Pliers

for grip rings on shafts

DIN ISO 5743

46


> for fitting grip rings on shafts from 1.5 - 30 mm dia.

> with opening spring

> solid style, forged

> non-slip, solid tips

> pliers body and tips: chrome vanadium electric steel, forged, oil-hardened

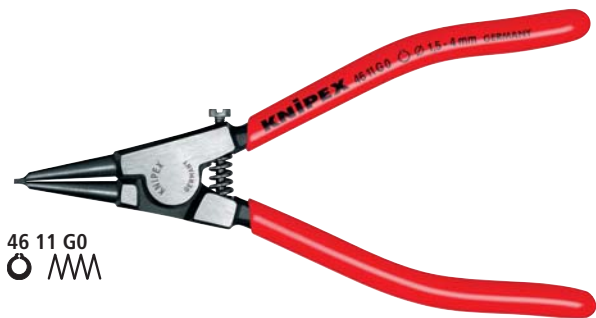

46 11 G0
 MM



46 11 G2
 MM

46 11 G0

for rings of 1.5 - 4.0 mm dia., with adjustable stop screw to prevent overstretching

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Size of shaft Ø mm | Tips Ø mm | ⚖ g |
|-------------|--------------|------|----|--------------------|----------|----------------|--------------------|-----------|-----|
| 46 11 G0 | 047896 | 140 | MM | black atramentized | polished | plastic coated | 1.5 - 4.0 | 0.9 | 87 |
| 46 11 G1 | 031062 | 140 | MM | black atramentized | polished | plastic coated | 4.0 - 7.0 | 1.3 | 85 |
| 46 11 G2 | 031079 | 140 | | | | | 5.0 - 13.0 | 1.8 | 85 |
| 46 11 G3 | 031086 | 140 | | | | | 14.0 - 18.0 | 2.3 | 86 |
| 46 11 G4 | 031093 | 180 | | | | | 20.0 - 30.0 | 3.2 | 134 |

Circlip Pliers Sets

4 parts

00
19

- > tool roll made of hard-wearing polyester fabric
- > with practical, adjustable quickrelease fastener



00 19 56
⊙ ⊙



00 19 57
⊙ ⊙

00 19 56

four common Circlip Pliers for internal and external circlips

00 19 57

four common Precision Circlip Pliers for highest requirements

| Article No. | EAN | | | Style | Capacity Ø mm | Tips Ø mm | Quantity | g |
|-----------------|----------------|-----------|--------------------------------------|---|------------------|--------------|----------|-----|
| 00 19 56 | 4003773-030973 | | Circlip Pliers Set 4 parts | | | | | 670 |
| | | ⊙ | 44 11 J2 | Circlip Pliers for internal circlips into bores | straight tips | 19 - 60 | 1.8 | 1 |
| | | ⊙ ∠90° | 44 21 J21 | | angled tips | 19 - 60 | 1.8 | 1 |
| | | ⊙ MM | 46 11 A2 | Circlip Pliers for external circlips on shafts | straight tips | 19 - 60 | 1.8 | 1 |
| | | ⊙ ∠90° MM | 46 21 A21 | | angled tips | 19 - 60 | 1.8 | 1 |
| 00 19 57 | 050056 | | Precision Circlip Pliers Set 4 parts | | | | | 665 |
| | | ⊙ | 48 11 J1 | Precision Circlip Pliers for internal circlips into bores | straight tips | 12 - 25 | 1.3 | 1 |
| | | | 48 11 J2 | | | 19 - 60 | 1.8 | 1 |
| | | ⊙ | 49 11 A1 | Precision Circlip Pliers for external circlips on shafts | | 10 - 25 | 1.3 | 1 |
| | | ⊙ MM | 49 11 A2 | | | 19 - 60 | 1.8 | 1 |

Sets of pliers

in a foam tray

00
20

- > in a foam tray for workbenches and tool trolleys
- > clearly organised storage of tools
- > precisely-sized recesses for holding the pliers
- > foam tray dimensions (L x W x H): 335 x 165 x 33 mm
- > Material: two colour, closed pore foam



00 20 01 V02



00 20 01 V09

| Article No. | EAN | | | | | Quantity | g | |
|---------------------|--------|-----------|--|---|--|----------|---|-----|
| 00 20 01 V02 | 069652 | | Circlip Pliers Set "SRZ" Six precision circlip pliers in a foam tray | | | | 6 | 915 |
| | | ⊙ | 48 11 J1 | Precision Circlip Pliers for internal circlips into bores | | 1 | | |
| | | | 48 11 J2 | | | 1 | | |
| | | ⊙ ∠90° | 48 21 J21 | | | 1 | | |
| | | ⊙ MM | 49 11 A1 | Precision Circlip Pliers for external circlips on shafts | | 1 | | |
| | | | 49 11 A2 | | | 1 | | |
| | | ⊙ MM ∠90° | 49 21 A21 | | | 1 | | |
| 00 20 01 V09 | 073291 | | Circlip Pliers Set "SRZ II" Four precision circlip pliers in a foam tray | | | | 4 | 820 |
| | | ⊙ | 48 11 J2 | Precision Circlip Pliers, for internal circlips in bore holes | | 1 | | |
| | | ⊙ ∠90° | 48 21 J21 | | | 1 | | |
| | | ⊙ MM | 49 11 A2 | Precision Circlip Pliers, for external circlips on shafts | | 1 | | |
| | | ⊙ MM ∠90° | 49 21 A21 | | | 1 | | |

Precision Circlip Pliers Sets

00
20

- > attractive sales packaging with Euro standard perforation
- > contains common Precision Circlip Pliers for highest requirements
- > sturdy plastic packaging, also suitable for storage of the pliers



00 20 03 SB
⊙ ⊙



00 20 04 SB
⊙ ⊙

| Article No. | EAN 4003773- | | | Style | Capacity Ø mm | Tips Ø mm | Quantity | ⚖ g | |
|--------------------|--------------|-------------|---|---------------|---------------|-----------|----------|--------|------|
| 00 20 03 SB | 050100 | | Precision Circlip Pliers Set | | | | | 685 | |
| | | ⊙ ⊙ | 48 11 J1 48 11 J2 | straight tips | 12 - 25 | 1.3 | 1 | | |
| | | | Precision Circlip Pliers for internal circlips into bores | | 19 - 60 | 1.8 | 1 | | |
| | | ⊙ ⊙ MM | 49 11 A1 49 11 A2 | | 10 - 25 | 1.3 | 1 | | |
| | | | Precision Circlip Pliers for external circlips on shafts | | 19 - 60 | 1.8 | 1 | | |
| 00 20 04 SB | 062417 | | Precision Circlip Pliers Set | | | | | | 1275 |
| | | ⊙ ⊙ | 48 11 J1 48 11 J2 | straight tips | 12 - 25 | 1.3 | 1 | | |
| | | | Precision Circlip Pliers for internal circlips into bores | | 19 - 60 | 1.8 | 1 | | |
| | | ⊙ ⊙ MM | 49 11 A1 49 11 A2 | | 10 - 25 | 1.3 | 1 | | |
| | | | Precision Circlip Pliers for external circlips on shafts | | 19 - 60 | 1.8 | 1 | | |
| | | ⊙ ⊙ ∠90° | 48 21 J11 48 21 J21 | angled tips | 12 - 25 | 1.3 | 1 | | |
| | | | Precision Circlip Pliers for internal circlips into bores | | 19 - 60 | 1.8 | 1 | | |
| | | ⊙ ⊙ MM ∠90° | 49 21 A11 49 21 A21 | | 12 - 25 | 1.3 | 1 | | |
| | | | Precision Circlip Pliers for external circlips on shafts | | 19 - 60 | 1.8 | 1 | | |

Precision Circlip Pliers Set

00
21

- > high quality, shock-resistant plastic case
- > contains common Precision Circlip Pliers for highest requirements
- > precisely-sized recesses for holding the pliers
- > clearly organised storage of tools
- > dimensions, (W x H x D): 260 x 80 x 210 mm

00 21 25
⊙ ⊙



| Article No. | EAN 4003773- | | | Style | Capacity Ø mm | Tips Ø mm | Quantity | ⚖ g |
|-----------------|--------------|-------------|---|---------------|---------------|-----------|----------|--------|
| 00 21 25 | 050131 | | Precision-Circlip Pliers Set | | | | | 1635 |
| | | ⊙ ⊙ | 48 11 J1 48 11 J2 | straight tips | 12 - 25 | 1.3 | 1 | |
| | | | Precision Circlip Pliers for internal circlips into bores | | 19 - 60 | 1.8 | 1 | |
| | | ⊙ ⊙ MM | 49 11 A1 49 11 A2 | | 10 - 25 | 1.3 | 1 | |
| | | | Precision Circlip Pliers for external circlips on shafts | | 19 - 60 | 1.8 | 1 | |
| | | ⊙ ⊙ ∠90° | 48 21 J11 48 21 J21 | angled tips | 12 - 25 | 1.3 | 1 | |
| | | | Precision Circlip Pliers for internal circlips into bores | | 19 - 60 | 1.8 | 1 | |
| | | ⊙ ⊙ MM ∠90° | 49 21 A11 49 21 A21 | | 10 - 25 | 1.3 | 1 | |
| | | | Precision Circlip Pliers for external circlips on shafts | | 19 - 60 | 1.8 | 1 | |

Circlip Pliers Sets

00
20

- > attractive sales packaging with Euro standard perforation
- > contains common Circlip Pliers for highest requirements
- > sturdy plastic packaging, also suitable for storage of the pliers



00 20 04 V01
○ ○




00 20 03 V02
○ ○


| Article No. | EAN 4003773- | | | Style | Capacity Ø mm | Tips Ø mm | Quantity | △ g |
|---------------------|-----------------|--------|--|---------------|------------------|--------------|----------|--------|
| 00 20 03 V02 | 077640 | | Circlip Pliers Set | | | | | 450 |
| | | ○ | 44 11 J1 44 11 J2 | straight tips | 12 - 25 | 1.3 | 1 | |
| | | | Circlip Pliers for internal circlips into bores | | 19 - 60 | 1.8 | 1 | |
| | | ○ | 46 11 A1 46 11 A2 | | 10 - 25 | 1.3 | 1 | |
| | | | Circlip Pliers for external circlips on shafts | | 19 - 60 | 1.8 | 1 | |
| 00 20 04 V01 | 077633 | | Circlip Pliers Set | | | | | 890 |
| | | ○ | 44 11 J1 44 11 J2 | straight tips | 12 - 25 | 1.3 | 1 | |
| | | | Circlip Pliers for internal circlips into bores | | 19 - 60 | 1.8 | 1 | |
| | | ○ | 46 11 A1 46 11 A2 | | 10 - 25 | 1.3 | 1 | |
| | | | Circlip Pliers for external circlips on shafts | | 19 - 60 | 1.8 | 1 | |
| | | ○ ∠90° | 44 21 J11 44 21 J21 | angled tips | 12 - 25 | 1.3 | 1 | |
| | | | Circlip Pliers for internal circlips into bores | | 19 - 60 | 1.8 | 1 | |
| | | ○ ∠90° | 46 21 A11 46 21 A21 | | 10 - 25 | 1.3 | 1 | |
| | | | Circlip Pliers for external circlips on shafts | | 19 - 60 | 1.8 | 1 | |



Carpenters' Pincers and Concreters' Nippers

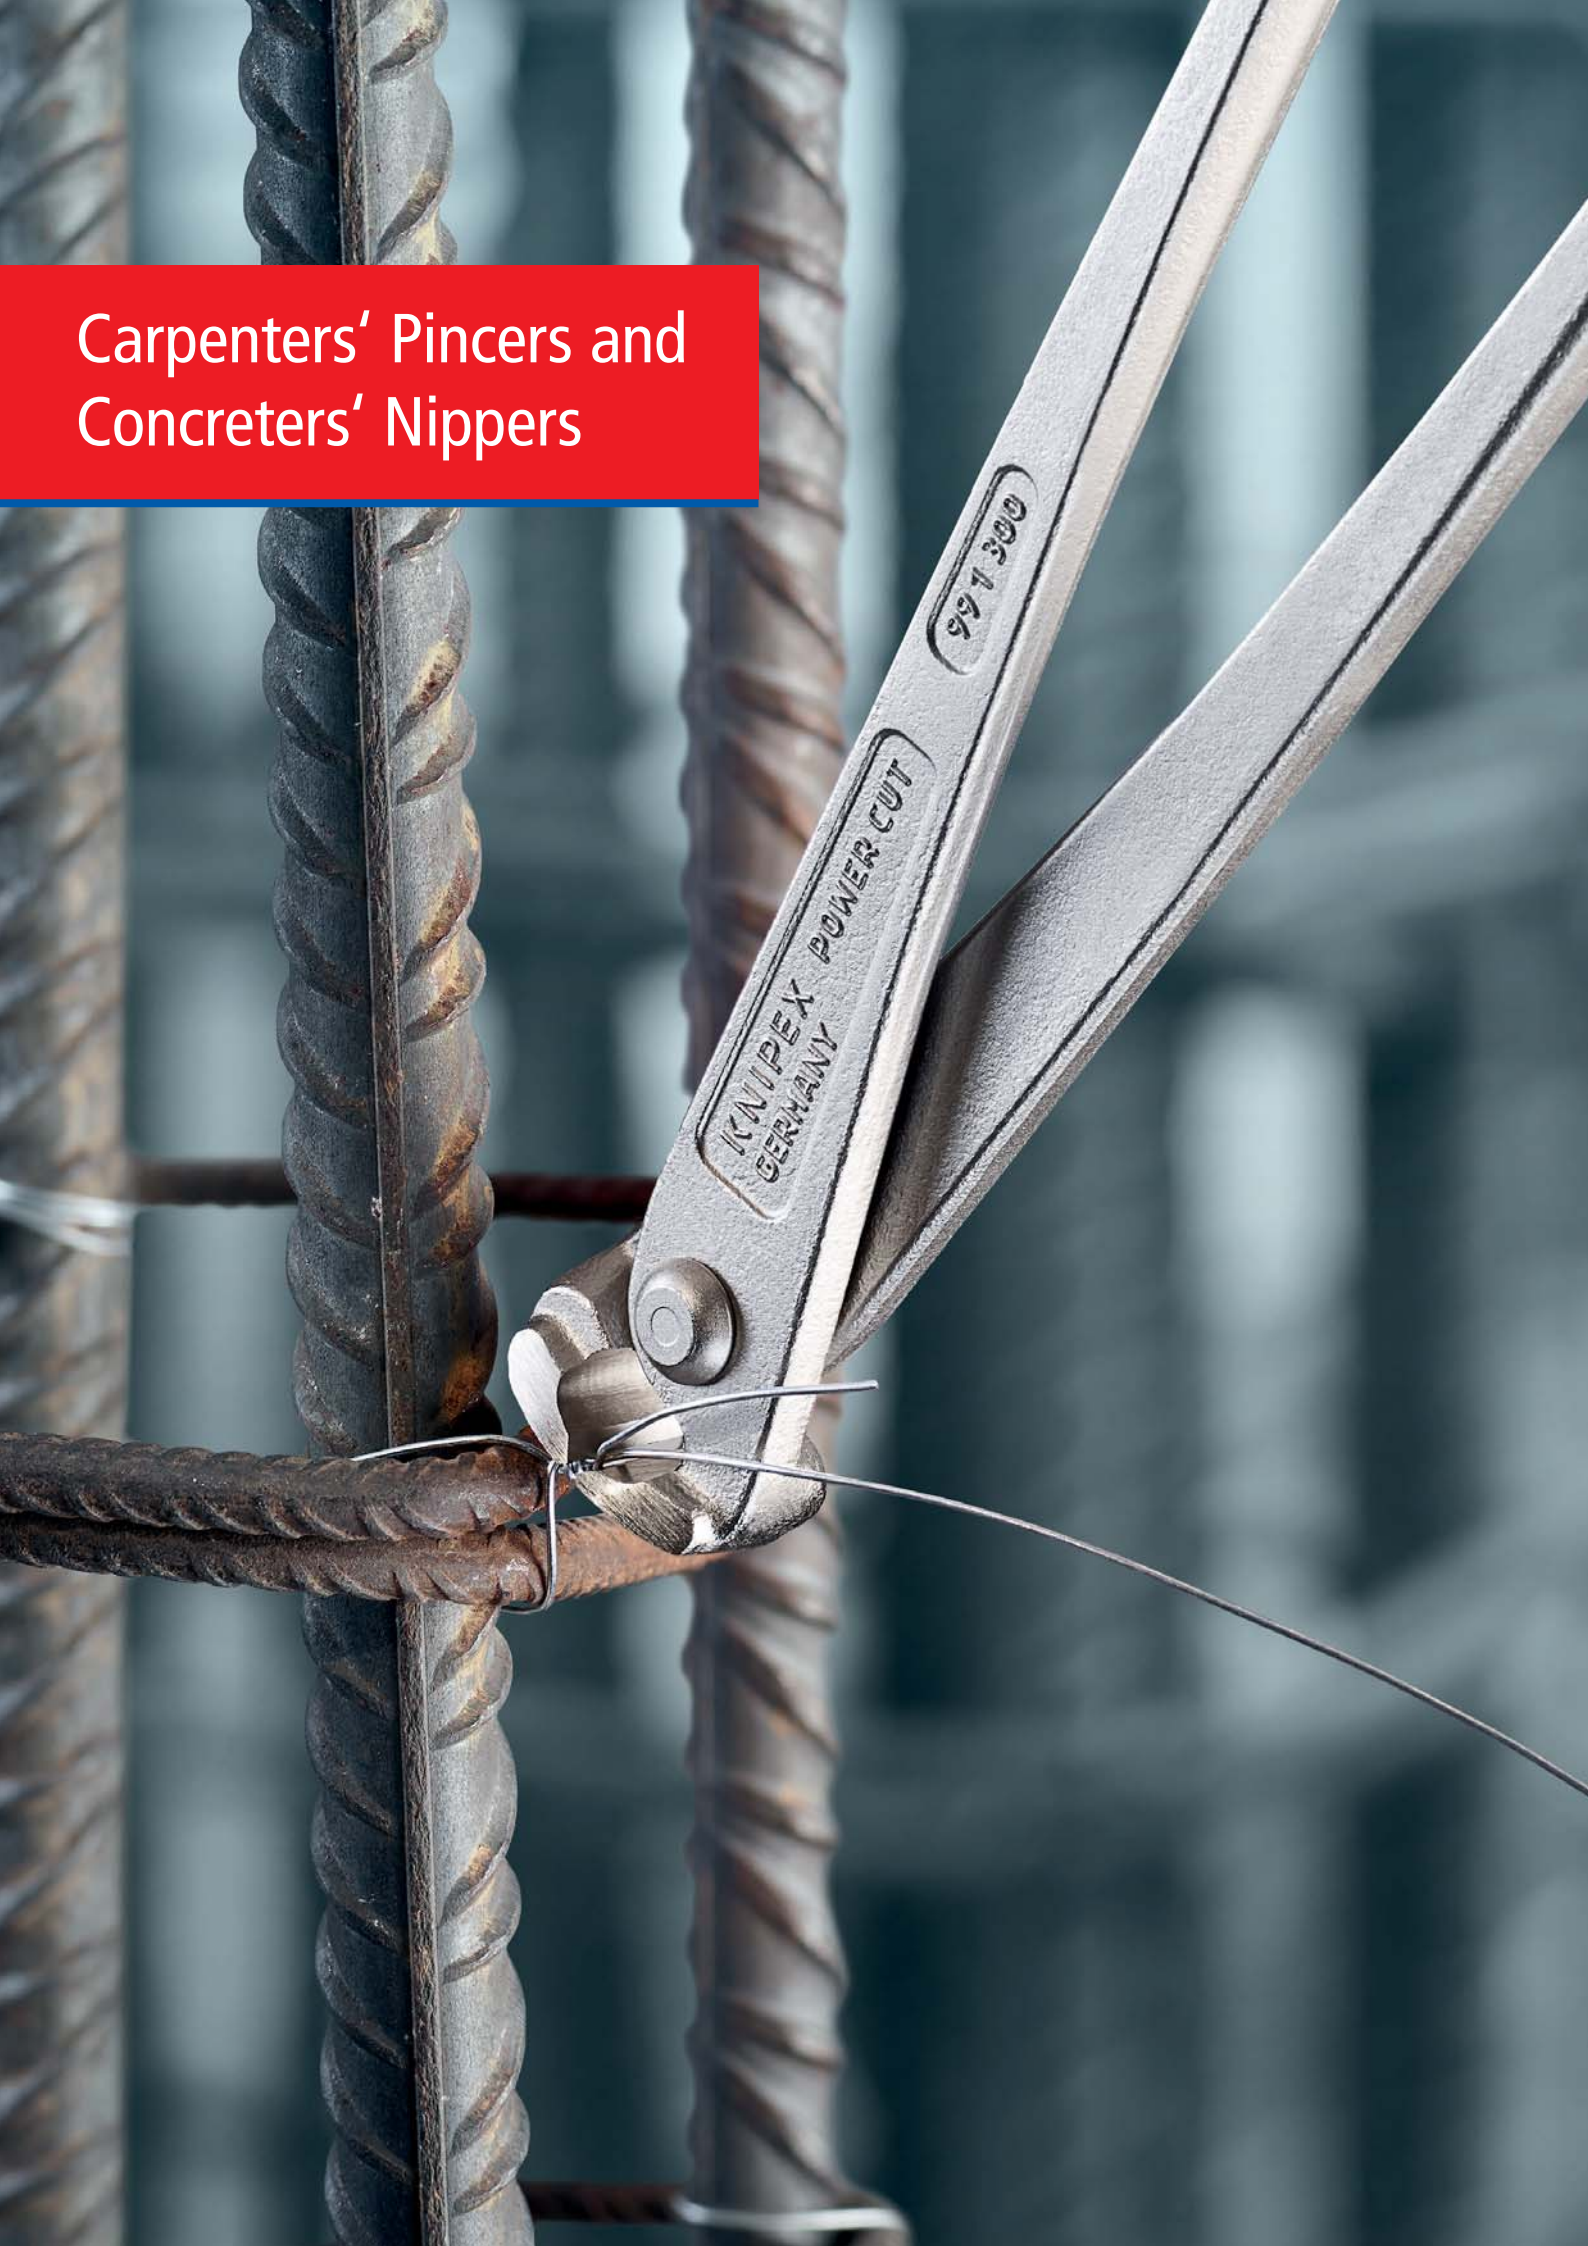

| | |
|--|----|
| Carpenters' Pincers | 86 |
| Hammerhead Style Carpenters' Pincers | 86 |
| Farriers' Pincers (Tear-off Pliers for vehicle bodywork) | 87 |
| Potters' Pincers (Brick Pincers) | 87 |
| End Cutting Nippers | 87 |
| Concreters' Nippers (Tower Pincers, Steel Fixers' Nippers) | 88 |
| High Leverage Concreters' Nippers | 89 |

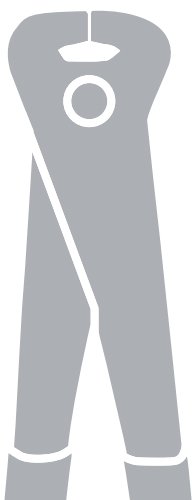

Carpenters' Pincers

DIN ISO 9243

50

- > for heaviest duty
- > specially favoured by craftsmen for their precise workmanship
- > extreme wear resistance and well balanced
- > cutting edges additionally hardened; cutting edge hardness approx. 60 HRC
- > Special tool steel, forged, oil-hardened



50 00 210



50 01 225



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | |
|-------------|-----------------|---------|---|--------------------|----------|----------------|--------------------|--------|
| | | | | | | | ● Ø mm | ⚖ g |
| 50 00 160 | 013129 | 160 | | | | | 1.8 | 215 |
| 50 00 180 | 013136 | 180 | | | | | 2.0 | 303 |
| 50 00 210 | 013143 | 210 | ✔ | black atramentized | polished | | 2.2 | 398 |
| 50 00 225 | 013150 | 225 | | | | | 2.2 | 427 |
| 50 00 250 | 013167 | 250 | | | | | 2.2 | 563 |
| 50 00 300 | 015710 | 300 | | | | | 2.4 | 862 |
| 50 01 160 | 015802 | 160 | | | | | 1.8 | 223 |
| 50 01 180 | 016021 | 180 | | | | | 2.0 | 316 |
| 50 01 210 | 016052 | 210 | ✔ | black atramentized | polished | plastic coated | 2.2 | 411 |
| 50 01 225 | 016083 | 225 | | | | | 2.2 | 437 |
| 50 01 250 | 016267 | 250 | | | | | 2.2 | 583 |
| 50 01 300 | 016915 | 300 | | | | | 2.4 | 903 |

Hammerhead Style Carpenters' Pincers

DIN ISO 9243

51

- > with striking face to hammer down nails
- > cutting edges additionally hardened; cutting edge hardness approx. 60 HRC
- > Special tool steel, forged, oil-hardened



51 01 210



Multi-functional:
driving in and pulling nails


| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | |
|-------------|-----------------|---------|---|--------------------|----------|----------------|--------------------|--------|
| | | | | | | | ● Ø mm | ⚖ g |
| 51 01 210 | 023104 | 210 | ✔ | black atramentized | polished | plastic coated | 1.8 | 413 |

Farriers' Pincers

(Tear-off Pliers for vehicle bodywork)

DIN ISO 5743

55



- > the ideal pliers for the farrier
- > with small head and anvil for redirecting horseshoe-nails
- > also suitable for dismantling work in vehicle body workshops
- > cutting edges additionally hardened; cutting edge hardness approx. 59 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened



55 00 300



| | | | | | | | |
|-------------|-----------------|---------|--|--------------------|----------|------------------|--------|
| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Head width mm | ⚖ g |
| 55 00 300 | 014072 | 300 | | black atramentized | polished | 20.0 | 786 |

Potters' Pincers

(Brick Pincer)

DIN ISO 5743

58

- > for pottery work
- > with wire cutter for soft wire
- > cutting edges additionally hardened; cutting edge hardness approx. 59 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened



58 30 225



| | | | | | | | |
|-------------|-----------------|---------|--|--------------------|----------|------------------|--------|
| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Head width mm | ⚖ g |
| 58 30 225 | 014331 | 225 | | black atramentized | polished | 20.0 | 347 |

End Cutting Nippers

68



Head shape provides optimised movement when tightening steel mesh knots during reinforced concrete work

- > with cutting edges for soft and hard wire
- > also suitable for twisting and cutting binding wire
- > cutting edges additionally induction hardened, cutting edge hardness approx. 61 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened



68 01 180



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | | ⚖ g |
|-------------|-----------------|---------|--|--------------------|----------|----------------|--------------------|------|------|--------|
| | | | | | | | ⊘ mm | ⊘ mm | ⊘ mm | |
| 68 01 160 | 013792 | 160 | | black atramentized | polished | plastic coated | 4.0 | 2.8 | 2.3 | 202 |
| 68 01 180 | 013808 | 180 | | | | | 4.0 | 3.2 | 2.5 | 284 |
| 68 01 200 | 013815 | 200 | | | | | 4.0 | 3.5 | 2.8 | 319 |
| 68 01 280 | 077664 | 280 | | | | | 4.5 | 4.0 | 3.2 | 465 |

Concreters' Nippers

(Tower Pincers, Steel Fixers' Nippers)

DIN ISO 9242

99
0

- > to twist and cut wire in one operation: fast, reliable and economical
- > unobtained precision and long service life make these the most widely purchased concreters' nippers in the world
- > cutting edges additionally hardened; cutting edge hardness approx. 61 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened

99 00 220 K12

with 12 mm head, particularly suitable for tile paving work



99 00 200



99 00 220



99 00 250



99 00 280



99 00 300



99 00 220 K12



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | ⚖ g |
|---------------|--------------|------|---|--------------------|----------|----------------|--------------------|------|-----|
| | | | | | | | Ø mm | Ø mm | |
| 99 00 200 | 014393 | 200 | | | | | 1.8 | 1.4 | 230 |
| 99 00 220 | 013273 | 220 | | | | | 2.4 | 1.6 | 315 |
| 99 00 250 | 013280 | 250 | ✔ | black atramentized | polished | | 2.4 | 1.6 | 400 |
| 99 00 280 | 014096 | 280 | | | | | 2.8 | 1.8 | 455 |
| 99 00 300 | 014409 | 300 | | | | | 3.1 | 1.8 | 510 |
| 99 00 220 K12 | 027812 | 220 | ✔ | black atramentized | polished | | 2.4 | 1.6 | 315 |
| 99 01 200 | 021452 | 200 | | | | | 1.8 | 1.4 | 247 |
| 99 01 220 | 021469 | 220 | | | | | 2.4 | 1.6 | 334 |
| 99 01 250 | 021483 | 250 | ✔ | black atramentized | polished | plastic coated | 2.4 | 1.6 | 429 |
| 99 01 280 | 021490 | 280 | | | | | 2.8 | 1.8 | 499 |
| 99 01 300 | 014416 | 300 | | | | | 3.1 | 1.8 | 548 |
| 99 04 220 | 048398 | 220 | | | | | 2.4 | 1.6 | 321 |
| 99 04 250 | 048213 | 250 | ✔ | bright zinc plated | | | 2.4 | 1.6 | 398 |
| 99 04 280 | 048220 | 280 | | | | | 2.8 | 1.8 | 457 |

High Leverage Concreters' Nippers

DIN ISO 9242

99
1

High lever transmission

25 % less effort required compared to conventional concreters' nippers of the same size

Extra-slim form for tying deep mounted steel rods

- > to lace concrete reinforcing steel with binding wire from a roll wire is twisted and cut in a single pass
- > high-leverage joint, minimising strain, even when thick binding wires are used
- > the high damping of the cutting stroke on cutting through the binding wire reduces the strain on tendons and muscles
- > cutting edges additionally hardened; cutting edge hardness approx. 61 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened



99 10 250



99 10 300



99 11 300




99 14 250




99 14 300

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | Head width mm | △ g |
|-------------|--------------|------|---|--------------------|----------|----------------|--------------------|------|---------------|-----|
| | | | | | | | Ø mm | Ø mm | | |
| 99 10 250 | 071396 | 250 | | black atamentized | polished | | 3.3 | 1.8 | 23.0 | 350 |
| 99 10 300 | 022398 | 300 | ✔ | black atamentized | polished | | 3.8 | 2.0 | 25.0 | 501 |
| 99 11 250 | 071402 | 250 | ✔ | black atamentized | polished | plastic coated | 3.3 | 1.8 | 23.0 | 350 |
| 99 11 300 | 042365 | 300 | ✔ | black atamentized | polished | plastic coated | 3.8 | 2.0 | 25.0 | 537 |
| 99 14 250 | 071419 | 250 | ✔ | bright zinc plated | | | 3.3 | 1.8 | 23.0 | 350 |
| 99 14 300 | 028116 | 300 | ✔ | bright zinc plated | | | 3.8 | 2.0 | 25.0 | 499 |

Cutting Pliers

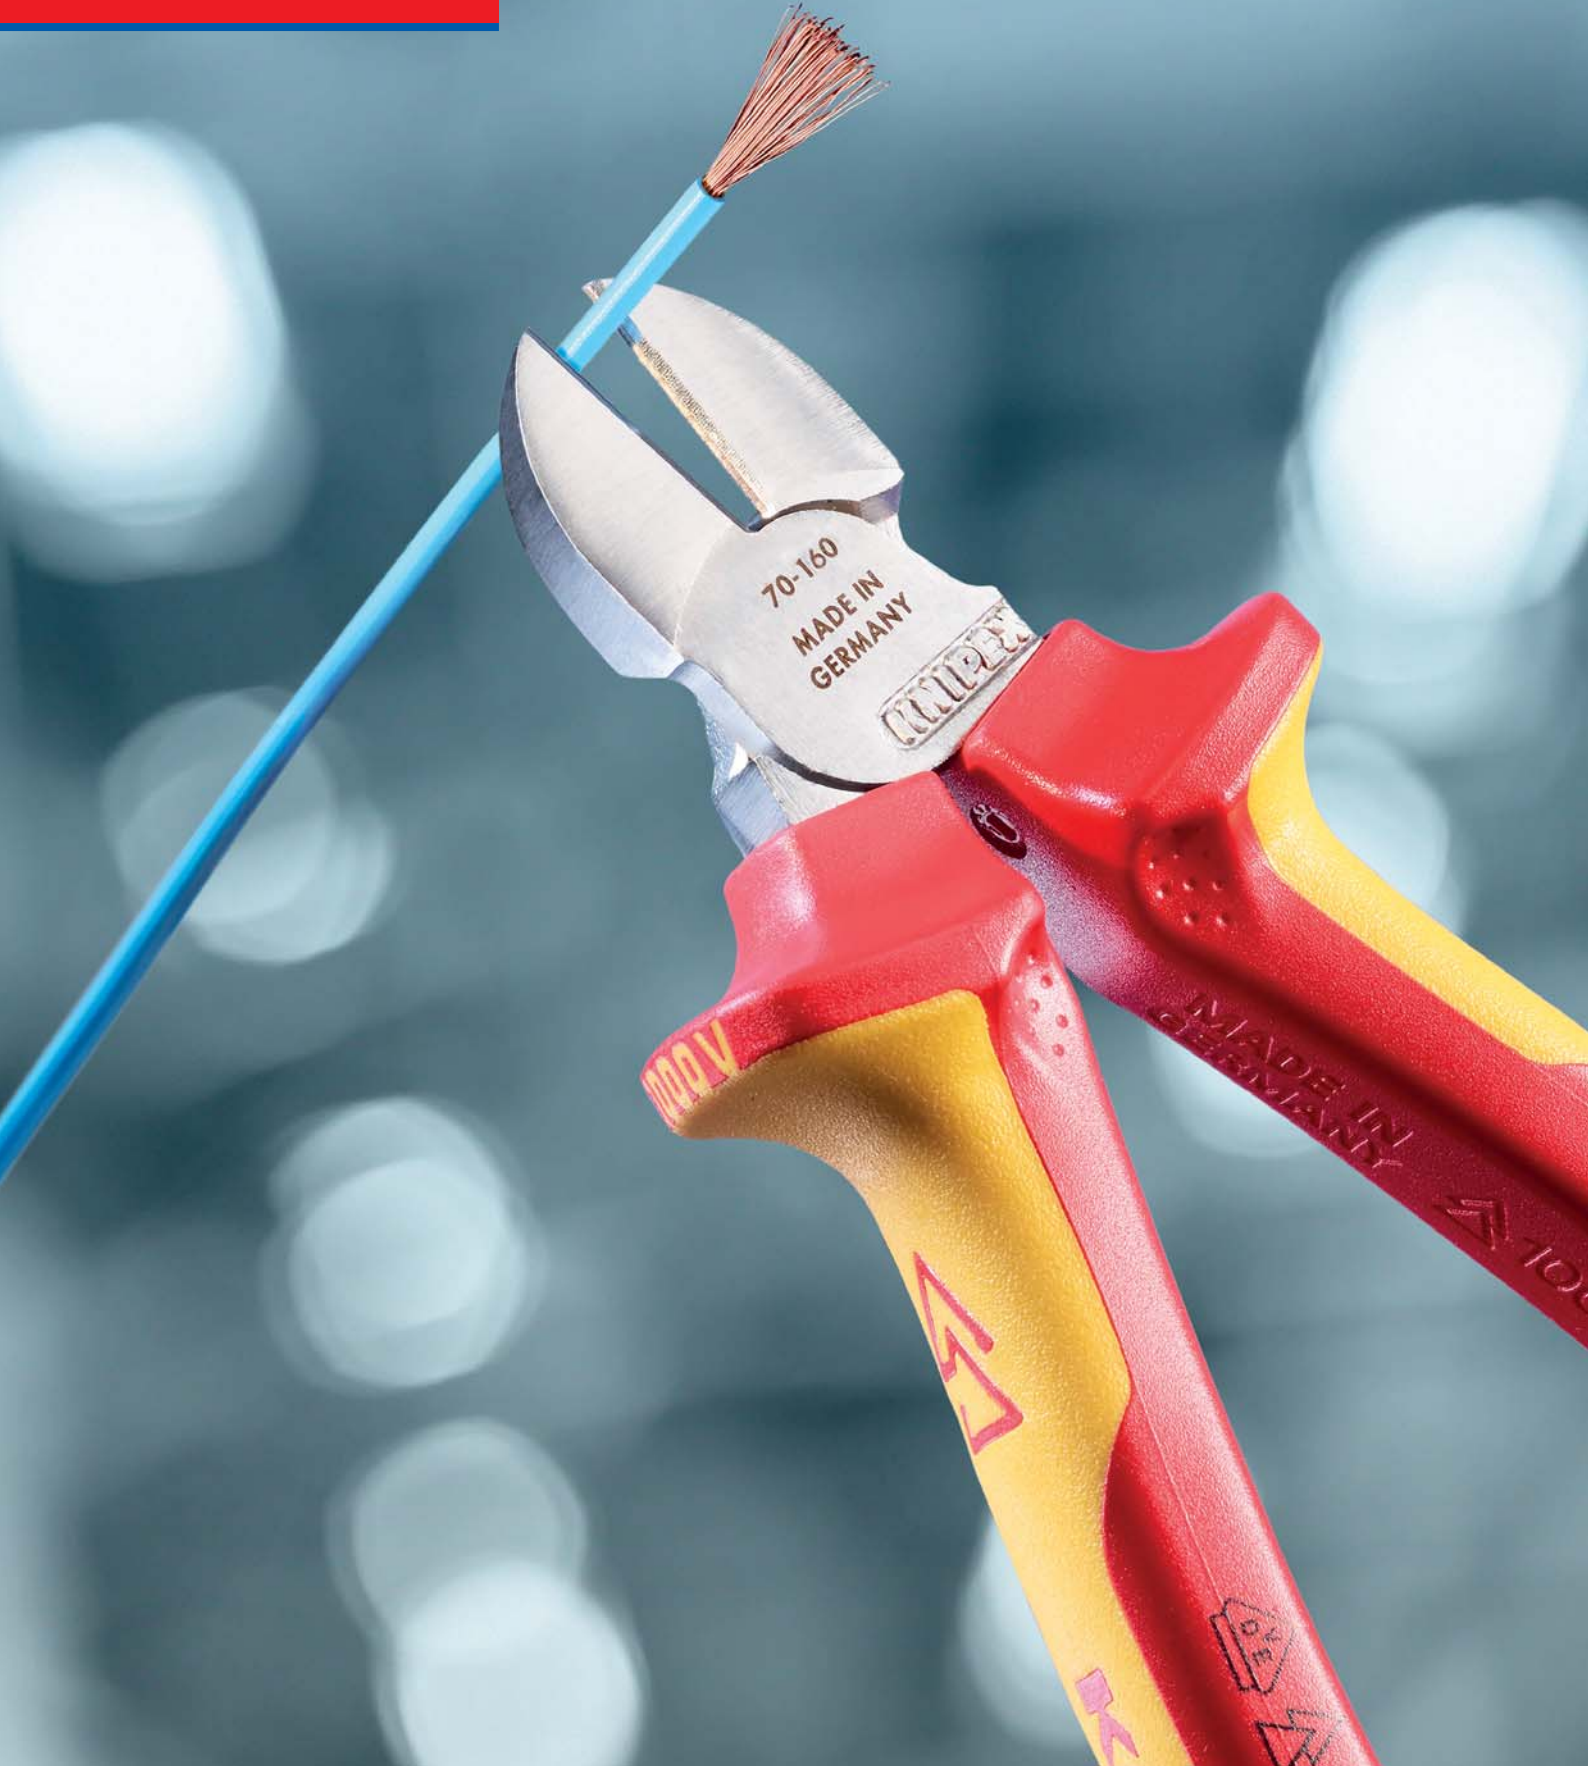

| | |
|--|-----|
| Diagonal Cutters for plastics | 92 |
| Diagonal Cutter for fibre optics | 92 |
| Diagonal Cutters | 94 |
| Diagonal Cutters – the next generation | 95 |
| Diagonal Cutters for electromechanics | 96 |
| X-Cut® | 97 |
| High Leverage Diagonal Cutters | 98 |
| TwinForce® | 100 |
| High Leverage Centre Cutters | 101 |
| CoBolt® | 102 |
| CoBolt® XL | 104 |
| Bolt Cutters | 106 |
| Concrete Mesh Cutter | 107 |
| Bolt End Cutting Nippers | 108 |
| High Leverage End Cutting Nippers | 108 |
| End Cutting Nippers | 109 |
| End Cutting Nippers for mechanics | 109 |

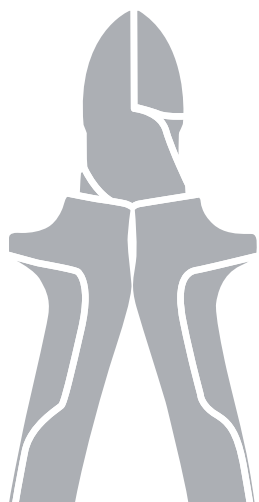

Diagonal Cutters for plastics


DIN ISO 5746

72

- > cutting face flush ground
- > for nearly flush cutting of moulded plastic components from sprues
- > cuts soft materials such as lead in a flush cut
- > with opening spring
- > Vanadium electric steel; forged, oil-hardened

72 01 160

with elongated cutting edge



Elongated cutting edge (5 mm)
25% more cutting performance



72 01 160
MM



72 02 125
MM



72 11 160
∠45° MM



72 21 160
∠85° MM

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | g |
|-------------|--------------|------|---------|----------|----------------------------|-----|
| 72 01 140 | 043713 | 140 | | | | 125 |
| 72 01 160 | 041245 | 160 | MM | polished | plastic coated | 164 |
| 72 01 180 | 046837 | 180 | | | | 193 |
| 72 02 125 | 044215 | 125 | MM | polished | with multi-component grips | 109 |
| 72 11 160 | 046813 | 160 | ∠45° MM | polished | plastic coated | 156 |
| 72 21 160 | 046820 | 160 | ∠85° MM | polished | plastic coated | 165 |

Diagonal Cutter for fibre optics

DIN ISO 5743

72
51

- > specially developed for cutting fibre optics (glass fibre cables)
- > with elongated cutting edge
- > cutting face flush ground
- > cutting edges additionally induction hardened
- > with opening spring
- > Vanadium electric steel, forged, multi stage oil-hardened



72 51 160
MM

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | g |
|-------------|--------------|------|----|----------|----------------|-----|
| 72 51 160 | 028031 | 160 | MM | polished | plastic coated | 166 |

KNIPEX WORLD OF DIAGONAL CUTTERS

With its four tailor-made diagonal cutters, KNIPEX provides solutions for every application. An extraordinary variety ensures an excellent response from the "KNIPEX World of diagonal cutters" to whatsoever specification.

KNIPEX-Diagonal Cutter

The classic model. The indispensable cutting tool for versatile use.

KNIPEX-High Leverage Diagonal Cutter

The robust. For very tough, continuous use.

KNIPEX X-Cut®

The all-rounder. Compact and light. Powerful and precise.

KNIPEX TwinForce®

The superior model. For comfortable cutting, repetitive cutting or extremely hard cutting jobs.

TwinForce®



The reapplying cutter
Double-hinged design
Hand force is multiplied by 39

Diagonal Cutter



Long cutting edges for cutting cable; also precise enough for the finest stranded wires
Hand force is multiplied by 12

High Leverage Diagonal Cutter



Forged on hinged joint for robust use
Hand force is multiplied by 13

X-Cut®



Box joint:
greatest stability with little weight
Hand force is multiplied by 16



* notch – reapply – cut through

Diagonal Cutters


DIN ISO 5749

70


- > the indispensable diagonal cutter for all-round use
- > high quality material and precise workmanship for long service life
- > precision cutting edges for soft and hard wire
- > clean cutting of thin copper wires, also at the cutting-edge tips
- > cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC
- > narrow head style for use in confined areas
- > Vanadium steel, forged, multi stage oil-hardened

70 05 180 T*

Pliers with tether attachment point for mounting a fall protection

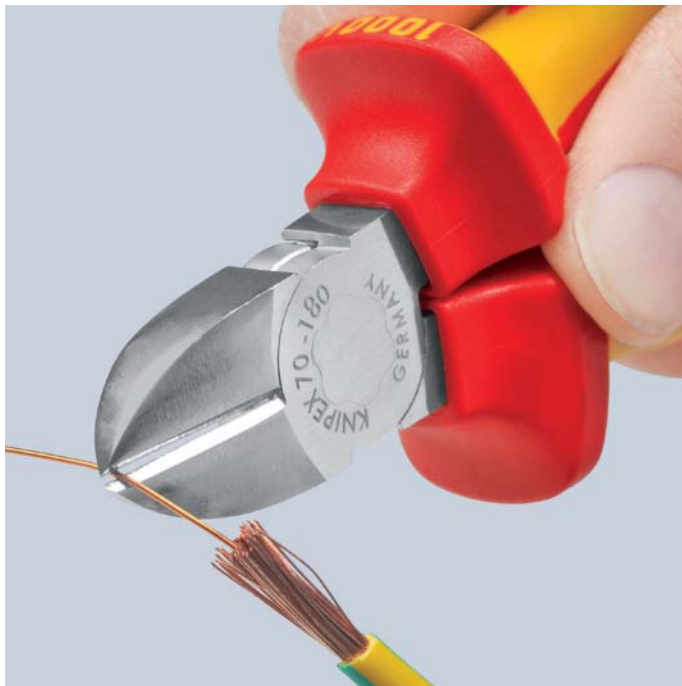

Clean cutting of thin copper wires, also at the cutting-edge tips

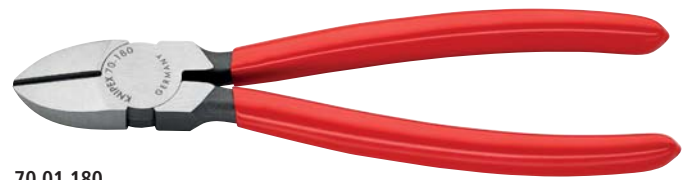

70 01 180



70 02 180



70 05 180 T



70 06 180



70 15 110



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | | |
|-------------|-----------------|---------|------------|-----------------------|----------|--|--------------------|------|------|--------|
| | | | | | | | ⊘ mm | ⊘ mm | ⊘ mm | ⚖ g |
| 70 01 110 | 014324 | 110 | | | | | 3.0 | 2.0 | 1.2 | 80 |
| 70 01 125 | 013402 | 125 | ✔ | black atramentized | polished | plastic coated | 3.0 | 2.3 | 1.5 | 80 |
| 70 01 140 | 013419 | 140 | | | | | 4.0 | 2.5 | 1.8 | 126 |
| 70 01 180 | 018070 | 180 | | | | | 4.0 | 3.0 | 2.5 | 200 |
| 70 02 125 | 034025 | 125 | | | | | 3.0 | 2.3 | 1.5 | 119 |
| 70 02 140 | 023098 | 140 | ✔ | black atramentized | polished | with multi-component grips | 4.0 | 2.5 | 1.8 | 150 |
| 70 02 180 | 034049 | 180 | | | | | 4.0 | 3.0 | 2.5 | 252 |
| 70 05 125 | 039501 | 125 | | | | | 3.0 | 2.3 | 1.5 | 119 |
| 70 05 140 | 039488 | 140 | | | | with multi-component grips | 4.0 | 2.5 | 1.8 | 154 |
| 70 05 180 | 043706 | 180 | ✔ | chrome plated | | | 4.0 | 3.0 | 2.5 | 246 |
| 70 05 180 T | 080039 | 180 | | | | with multi-component grips and integrated tether attachment point | 4.0 | 3.0 | 2.5 | 250 |
| 70 06 125 | 018124 | 125 | | | | | 3.0 | 2.3 | 1.5 | 121 |
| 70 06 140 | 040293 | 140 | ⚡ 1000 V ⚡ | chrome plated | | insulated with multi-component grips, VDE-tested | 4.0 | 2.5 | 1.8 | 160 |
| 70 06 180 | 033813 | 180 | | | | | 4.0 | 3.0 | 2.5 | 254 |
| 70 07 180 | 018179 | 180 | ⚡ 1000 V ⚡ | chrome plated | | with dipped insulation, VDE-tested | 4.0 | 3.0 | 2.5 | 269 |
| 70 11 110 | 018193 | 110 | ✔ | black atramentized | polished | plastic coated | 3.0 | 2.0 | 1.2 | 91 |
| 70 15 110 | 029649 | 110 | ✔ | chrome plated | | with multi-component grips | 3.0 | 2.0 | 1.2 | 98 |

Diagonal Cutters

DIN ISO 5749

70

The next generation of the KNIPEX classic, with even better features:



20 % higher cutting force than the previous model, plus longer cutting edges

High cutting force due to optimum cutting geometry and transmission ratio

- > strong precision rivet for even movement and long service-life
- > high-precision cutting edges: additionally induction hardened, cutting-edge hardness approx. 62 HRC
- > narrow head with long cutting edges: good access also in confined areas
- > long tool life and high loading capacity
- > the essential diagonal cutters for diverse use
- > Vanadium steel, forged, multi stage oil-hardened

70 05 160 T*

Pliers with tether attachment point for mounting a fall protection



Cuts thin Cu wire accurately, also at the cutting-edge tips



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | | ⚖ g |
|-------------|--------------|------|--------------|--------------------|----------|---|--------------------|------|------|-----|
| | | | | | | | Ø mm | Ø mm | Ø mm | |
| 70 01 160 | 013426 | 160 | ✂ | black atramentized | polished | plastic coated | 4.0 | 3.0 | 2.0 | 171 |
| 70 02 160 | 034032 | 160 | ✂ | black atramentized | | with multi-component grips | 4.0 | 3.0 | 2.0 | 206 |
| 70 05 160 | 039600 | 160 | ✂ | chrome plated | | with multi-component grips | 4.0 | 3.0 | 2.0 | 207 |
| 70 05 160 T | 080022 | 160 | ✂ | chrome plated | | with multi-component grips and integrated tether attachment point | 4.0 | 3.0 | 2.0 | 207 |
| 70 06 160 | 021995 | 160 | ⚡ 1000 V ⚠ ⚡ | chrome plated | | insulated with multi-component grips, VDE-tested | 4.0 | 3.0 | 2.0 | 216 |
| 70 07 160 | 018155 | 160 | ⚡ 1000 V ⚠ ⚡ | chrome plated | | with dipped insulation, VDE-tested | 4.0 | 3.0 | 2.0 | 227 |
| 70 26 160 | 018223 | 160 | ⚡ 1000 V ⚠ ⚡ | chrome plated | | insulated with multi-component grips, VDE-tested | 4.0 | | | 216 |

* Other tools with tethering can be found from page 254 ff

Diagonal Cutters

for electromechanics

DIN ISO 5749

76

- > with sharp, precisely aligned cutting edges for soft, hard wire and piano wire
- > cutting edges additionally induction hardened, cutting edge hardness approx. 63 HRC
- > lap joint
- > Vanadium electric steel, forged, multi stage oil-hardened

76 12 125

low-friction double spring for gentle and even opening

76 22 125

without bevel for flush cutting of soft wires;

low-friction double spring for gentle and even opening

76 81 125


particularly tapered head with small bevel for work in confined areas (cable harnesses, multiple stranded wires)



76 01 125
✳️ 🟢



76 05 125
✳️ 🟢



| Article No. | EAN 4003773- | ↔ mm | ✳️ 🟢 | Pliers | Head | Handles | Cutting capacities | | | | Dimensions | | | ⚖ g |
|-------------|--------------|------|--------|-----------------------|----------|----------------------------|--------------------|------|------|------|------------|------|------|-----|
| | | | | | | | Ø mm | Ø mm | Ø mm | Ø mm | A mm | B mm | D mm | |
| 76 01 125 | 018490 | 125 | ✳️ 🟢 | black atramentized | polished | plastic coated | 0.4 - 3.0 | 2.3 | 1.5 | 0.6 | 14.5 | 16 | 9 | 90 |
| 76 03 125 | 018506 | 125 | ✳️ 🟢 | chrome plated | | plastic coated | 0.4 - 2.5 | 1.8 | 1.0 | 0.6 | 14.5 | 16 | 9 | 90 |
| 76 05 125 | 005315 | 125 | ✳️ 🟢 | chrome plated | | with multi-component grips | 0.4 - 2.5 | 1.8 | 1.0 | 0.6 | 14.5 | 16 | 9 | 118 |
| 76 12 125 | 048015 | 125 | ✳️ 🟢 🟡 | black atramentized | polished | with multi-component grips | 0.4 - 2.5 | 1.8 | 1.0 | 0.6 | 14.5 | 16 | 9 | 112 |
| 76 22 125 | 048022 | 125 | ✳️ 🟢 🟡 | black atramentized | polished | with multi-component grips | 0.4 - 2.5 | | | | 14.5 | 16 | 9 | 107 |
| 76 81 125 | 018544 | 125 | ✳️ 🟡 | black atramentized | polished | plastic coated | 0.4 - 1.7 | 1.3 | 0.8 | | 14.5 | 16 | 9 | 87 |

KNIPEX X-Cut®

Compact Diagonal Cutters, high lever transmission
DIN ISO 5749

73


Powerful, light and universal

Cuts precisely finest strands as well as multi-core cables and piano wires

- > high cutting capacity with very little effort thanks to the optimum co-ordination of cutting-edge angle and leverage ratio
- > box-joint design: highest stability with low weight
- > large opening width for thicker cables
- > cuts precisely, even through fine copper wires
- > compact, low-weight construction
- > doubly supported joint axis for heaviest duty
- > universally usable, in the assembly, maintenance and production
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

73 05 160 T*

Pliers with tether attachment point for mounting a fall protection



Box-joint design: highest stability with low weight



73 02 160



73 05 160



73 05 160 T



73 06 160
⚠ 1000 V

X-Cut®

Product video



40% less effort required

compared to diagonal cutters of the same length.
With double mounted hinged joint

| Article No. | EAN 4003773- | ↔ mm | Icons | Pliers | Head | Handles | Cutting capacities | | | | | ⚖ g |
|-------------|-----------------|---------|-----------------|-----------------------|----------|--|--------------------|------|------|------|------|--------|
| | | | | | | | ⊘ mm | ⊘ mm | ⊘ mm | ⊘ mm | ⊘ mm | |
| 73 02 160 | 075127 | 160 | 🟢🟢🟢 | black atramentized | polished | with multi-component grips | 4.8 | 3.8 | 2.7 | 2.2 | 12.0 | 175 |
| 73 05 160 | 075134 | 160 | 🟢🟢🟢 | chrome plated | | with multi-component grips | 4.8 | 3.8 | 2.7 | 2.2 | 12.0 | 175 |
| 73 05 160 T | 080077 | 160 | 🟢🟢🟢 | chrome plated | | with multi-component grips and integrated tether attachment point | 4.8 | 3.8 | 2.7 | 2.2 | 12.0 | 179 |
| 73 06 160 | 075141 | 160 | ⚠ 1000 V 🟢🟢🟢 | chrome plated | | insulated with multi-component grips, VDE-tested | 4.8 | 3.8 | 2.7 | 2.2 | 12.0 | 175 |

* Other tools with tethering can be found from page 254 ff

High Leverage Diagonal Cutters

DIN ISO 5746

74

- > for very tough, continuous use
- > high cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > precision cutting edges additionally induction hardened (cutting edge hardness approx. 64 HRC), for all sorts of wire including piano wire
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

Style 1
with opening spring; to be activated if required

Style 2
angled head offers clearance for gripping

Length 250 mm
the 250-mm-long diagonal cutter is suitable for copper conductors up to 16 mm² and aluminium conductors up to 35 mm²

74 02 200 / 74 02 250 / 74 22 200 / 74 22 250 T*
Pliers with tether attachment point for mounting a fall protection

20% less effort required

compared to conventional diagonal cutters of the same length.
With integrated forged joint axle. For very tough, continuous use



74 12:
opening spring in deactivated position



74 12: just gentle sliding with your thumb will activate the opening spring



74 01 200



74 02 250



74 02 250 T



74 05 200



74 06 200
1000 V



74 12 180



74 21 200
12°



74 07 200
1000 V



With integrated forged joint axle for very tough, continuous use

| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Head | Handles | Cutting capacities | | | |
|-------------|-----------------|---------|------------|-------|-----------------------|----------|--|--------------------|------|------|-----|
| | | | | | | | | Ø mm | Ø mm | Ø mm | g |
| 74 01 140 | 039747 | 140 | | | | | | 3.1 | 2.0 | 1.5 | 131 |
| 74 01 160 | 033141 | 160 | | | | | | 3.4 | 2.5 | 2.0 | 178 |
| 74 01 180 | 022008 | 180 | ✂ | 0 | black atramentized | polished | plastic coated | 3.8 | 2.7 | 2.2 | 241 |
| 74 01 200 | 034056 | 200 | | | | | | 4.2 | 3.0 | 2.5 | 263 |
| 74 01 250 | 034063 | 250 | | | | | | 4.6 | 3.5 | 3.0 | 391 |
| 74 02 140 | 042419 | 140 | | | | | | 3.1 | 2.0 | 1.5 | 157 |
| 74 02 160 | 023081 | 160 | ✂ | 0 | black atramentized | polished | with multi-component grips | 3.4 | 2.5 | 2.0 | 209 |
| 74 02 180 | 023074 | 180 | | | | | | 3.8 | 2.7 | 2.2 | 273 |
| 74 02 200 | 040309 | 200 | | | | | | 4.2 | 3.0 | 2.5 | 304 |
| 74 02 200 T | 080084 | 200 | ✂ | 0 | black atramentized | polished | with multi-component grips and integrated tether attachment point | 4.2 | 3.0 | 2.5 | 308 |
| 74 02 250 | 042402 | 250 | ✂ | 0 | black atramentized | polished | with multi-component grips | 4.6 | 3.5 | 3.0 | 437 |
| 74 02 250 T | 080091 | 250 | ✂ | 0 | black atramentized | polished | with multi-component grips and integrated tether attachment point | 4.6 | 3.5 | 3.0 | 441 |
| 74 05 140 | 039617 | 140 | | | | | | 3.1 | 2.0 | 1.5 | 157 |
| 74 05 160 | 022961 | 160 | | | | | | 3.4 | 2.5 | 2.0 | 209 |
| 74 05 180 | 022978 | 180 | ✂ | 0 | chrome plated | | with multi-component grips | 3.8 | 2.7 | 2.2 | 270 |
| 74 05 200 | 035367 | 200 | | | | | | 4.2 | 3.0 | 2.5 | 303 |
| 74 05 250 | 039754 | 250 | | | | | | 4.6 | 3.5 | 3.0 | 440 |
| 74 06 160 | 040705 | 160 | | | | | | 3.4 | 2.5 | 2.0 | 215 |
| 74 06 180 | 022985 | 180 | ⚠ 1000 V ⚡ | 0 | chrome plated | | insulated with multi-component grips, VDE-tested | 3.8 | 2.7 | 2.2 | 280 |
| 74 06 200 | 033820 | 200 | | | | | | 4.2 | 3.0 | 2.5 | 308 |
| 74 06 250 | 041955 | 250 | | | | | | 4.6 | 3.5 | 3.0 | 453 |
| 74 07 200 | 018414 | 200 | ⚠ 1000 V ⚡ | 0 | chrome plated | | with dipped insulation, VDE-tested | 4.2 | 3.0 | 2.5 | 328 |
| 74 07 250 | 018421 | 250 | | | | | | 4.6 | 3.5 | 3.0 | 510 |
| 74 12 160 | 065111 | 160 | ✂ MM | 1 | black atramentized | polished | with multi-component grips | 3.4 | 2.5 | 2.0 | 209 |
| 74 12 180 | 060192 | 180 | | | | | | 3.8 | 2.7 | 2.2 | 273 |
| 74 21 180 | 069973 | 180 | | | | | | 3.8 | 2.7 | 2.2 | 235 |
| 74 21 200 | 050483 | 200 | ∠12° ✂ | 2 | black atramentized | polished | plastic coated | 4.2 | 3.0 | 2.5 | 258 |
| 74 21 250 | 045021 | 250 | | | | | | 4.6 | 3.5 | 3.0 | 390 |
| 74 22 200 | 051831 | 200 | | | | | with multi-component grips | 4.2 | 3.0 | 2.5 | 300 |
| 74 22 200 T | 080107 | 200 | | | | | with multi-component grips and integrated tether attachment point | 4.2 | 3.0 | 2.5 | 304 |
| 74 22 250 | 071372 | 250 | ∠12° ✂ | 2 | black atramentized | polished | with multi-component grips | 4.6 | 3.5 | 3.0 | 437 |
| 74 22 250 T | 080114 | 250 | | | | | with multi-component grips and integrated tether attachment point | 4.6 | 3.5 | 3.0 | 441 |

* Other tools with tethering can be found from page 254 ff

KNIPEX TwinForce®

High Performance Diagonal Cutter

DIN ISO 5749

73

The superior High-Leverage Diagonal Cutter with patented double joint

- > ideal transmission of force due to double-hinged design
- > reliably cuts all types of wire, including steel tape
- > for rough or very fine cutting
- > low cutting impact: gentle on hands.
The tension on muscles and tendons is relieved
- > for comfortable cutting, repetitive cutting or extremely hard cutting jobs
- > high degree of stability and zero-backlash due to precisely milled forged-in axles
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

73 72 180 F

with opening spring to simplify reapplication and for repetitive cutting



73 71 180
PATENTED



73 72 180
PATENTED



73 72 180 F
PATENTED



The High Performance Diagonal Cutter with opening spring to simplify reapplication and for repetitive cutting



The opening spring can be easily activated and deactivated by a press of the thumb

| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Cutting capacities | | | | ⚖ g |
|--------------------|-----------------|---------|--------------------|----------|----------------------------|--------------------|------|------|------|--------|
| | | | | | | ∅ mm | ∅ mm | ∅ mm | ∅ mm | |
| 73 71 180 | 074762 | 180 | black atramentized | polished | plastic coated | 5.5 | 4.6 | 3.2 | 3.0 | 255 |
| 73 72 180 | 074779 | 180 | black atramentized | polished | with multi-component grips | 5.5 | 4.6 | 3.2 | 3.0 | 280 |
| 73 72 180 F | 077657 | 180 | black atramentized | polished | with multi-component grips | 5.5 | 4.6 | 3.2 | 3.0 | 280 |

TwinForce®

Product video




New for diagonal cutters

Cuts again 50% easier than the tried and tested KNIPEX High Leverage Diagonal Cutters


The option to reapply the tool. The KNIPEX TwinForce® cuts even 4 mm thick wire without great effort when reapplied two or three times. Conventional high leverage diagonal cutters either cannot cut these diameters or only with very great effort.

The revolutionary lever action design of KNIPEX TwinForce®, patented


KNIPEX TwinForce® Reappling

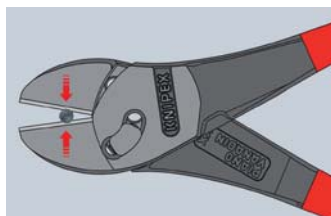


Insert the wires as close to the hinge as possible. In case of cutters with very high transmission, the width of the gap between the cutting edges close to the fulcrum may be less than the thickness of the wire. Wires may slip forward when the cutting starts.

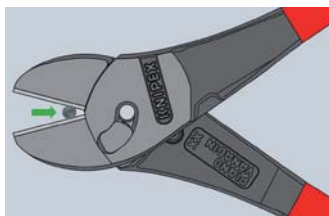

Continue cutting in the same location along the wire. Now cutting is much more easier because the wire remains in place closer to the fulcrum.

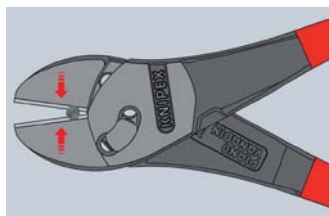

First make a notch in the wire using the KNIPEX TwinForce® until the required hand force increases considerably. Now open the pliers and slide the wire backwards towards the joint.

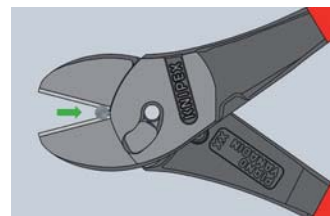

You can repeat this process if necessary.

Extremely easy cutting with little strain



High Leverage Centre Cutters
DIN ISO 5743

74
91

- > with integrated forged axle for heaviest duty
- > with precision cutting edges for soft, hard and piano wire
- > cuts thick wires with less effort than other diagonal cutters of the same length
- > centric precision cutting edges
- > high cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



74 91 250



The cutting edges are in the centre of the cutter head



| Article No. | EAN | ↔ mm | ▶▶ | Pliers | Head | Handles | Cutting capacities | | | | ⚖ g |
|-------------|----------------|------|----|--------------------|----------|----------------|--------------------|--------|--------|--------|-----|
| | | | | | | | ◐ Ø mm | ◑ Ø mm | ◒ Ø mm | ◓ Ø mm | |
| 74 91 250 | 4003773-034070 | 250 | ▶▶ | black atramentized | polished | plastic coated | 5.0 | 5.0 | 3.8 | 3.5 | 395 |

KNIPEX CoBolt®

Compact Bolt Cutters

DIN ISO 5743

71

CoBolt®

60% less effort

required compared to conventional high-leverage diagonal cutters. The ingenious lever-action mechanism ensures an extremely favourable lever ratio with very little friction. The cutting force is about 30 times higher than the hand force applied.

Exceptional cutting performance

- > precision cutting edges for soft and hard wire as well as piano wire
- > cuts components like bolts, nails, rivets, etc. up to 5.2 mm dia.
- > exceptional cutting performance with minimum effort because of unsurpassedly effective lever action design
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

Improved cutting performance

Micro-structured cutting edge allows easy cutting of large cross-sections

With gripping surface below the joint for gripping and pulling wires with a diameter as from 1 mm

71 12 200

opening spring and locking device are integrated in the handles also for comfortable work and protected transport

71 02 200 T*

Pliers with tether attachment point for mounting a fall protection



71 01 200



71 02 200



71 12 200



Product video



Micro-structured cutting edge allows easy cutting of large cross-sections



With gripping surface below the joint for gripping and pulling wires with a diameter as from 1 mm



Opening spring and locking device are integrated in the handles also for comfortable work and protected transport

| Article No. | EAN | ↔ mm | Icon | Pliers | Handles | Cutting capacities | | | | g |
|-------------|--------|------|------|--------------------|---|--------------------|------|------|------|-----|
| | | | | | | Ø mm | Ø mm | Ø mm | Ø mm | |
| 71 01 200 | 033165 | 200 | ▶◀ | black atramentized | plastic coated | 6.0 | 5.2 | 4.0 | 3.6 | 335 |
| 71 02 200 | 047056 | 200 | ▶◀ | black atramentized | with slim multi-component grips | 6.0 | 5.2 | 4.0 | 3.6 | 372 |
| 71 02 200 T | 080046 | 200 | ▶◀ | black atramentized | with multi-component grips and integrated tether attachment point | 6.0 | 5.2 | 4.0 | 3.6 | 376 |
| 71 12 200 | 066859 | 200 | ▶◀◻ | black atramentized | with slim multi-component grips | 6.0 | 5.2 | 4.0 | 3.6 | 375 |

The recess in the blade allows easier cutting of thicker wires, e.g. for anchor bolts in false ceilings

With gripping surface below the joint for gripping and pulling wires with a diameter as from 1 mm

71 32 200 / 71 32 200 T*

opening spring and locking device are integrated in the handles also for comfortable work and protected transport

71 32 200 T*

Pliers with tether attachment point for mounting a fall protection



71 31 200



71 31 200/71 32 200/71 32 200 T
The recess in the blade allows easier cutting of thicker wires, e.g. for anchor bolts in false ceilings



71 31 200/71 32 200/71 32 200 T
With gripping surface below the joint for gripping and pulling wires with a diameter as from 1 mm



| Article No. | EAN 4003773- | ↔ mm | Style | Pliers | Handles | Cutting capacities | | | | ⚖ g |
|-------------|--------------|------|-------|--------------------|---|--------------------|------|------|------|-----|
| | | | | | | ⊘ mm | ⊘ mm | ⊘ mm | ⊘ mm | |
| 71 31 200 | 042327 | 200 | 3 | black atramentized | plastic coated | 6.0 | 5.2 | 4.0 | 3.6 | 330 |
| 71 32 200 | 066880 | 200 | 3 | black atramentized | with slim multi-component grips | 6.0 | 5.2 | 4.0 | 3.6 | 370 |
| 71 32 200 T | 080060 | 200 | | | with multi-component grips and integrated tether attachment point | 6.0 | 5.2 | 4.0 | 3.6 | 374 |

20° angled head with single-sided joint bar and diagonal cutting edge for flush cutting; with space for gripping

71 22 200 / 71 22 200 T*

opening spring and locking device are integrated in the handles also for comfortable work and protected transport

71 22 200 T*

Pliers with tether attachment point for mounting a fall protection

71 41 200

the recess in the blade allows easier cutting of thicker wires, e.g. for anchor bolts in false ceilings



71 21 200



71 22 200



| Article No. | EAN 4003773- | ↔ mm | Style | Pliers | Handles | Cutting capacities | | | | ⚖ g |
|-------------|--------------|------|-------|--------------------|---|--------------------|------|------|------|-----|
| | | | | | | ⊘ mm | ⊘ mm | ⊘ mm | ⊘ mm | |
| 71 21 200 | 066866 | 200 | 3 | black atramentized | plastic coated | 6.0 | 5.2 | 4.0 | 3.6 | 320 |
| 71 22 200 | 066873 | 200 | 3 | black atramentized | with slim multi-component grips | 6.0 | 5.2 | 4.0 | 3.6 | 375 |
| 71 22 200 T | 080053 | 200 | | | with multi-component grips and integrated tether attachment point | 6.0 | 5.2 | 4.0 | 3.6 | 379 |
| 71 41 200 | 066897 | 200 | 3 | black atramentized | plastic coated | 6.0 | 5.2 | 4.0 | 3.6 | 335 |

* Other tools with tethering can be found from page 254 ff



KNIPEX CoBolt® XL

Compact bolt cutters

71

The compact bolt cutters from KNIPEX now also available in 250 mm length for one and two-hand operation. Up to a 40-fold increase of manual force.

For powerful cutting of larger cross-sections as well as very hard materials

Two-hand operation for maximum cutting force

- > 60% less effort required compared to high leverage diagonal cutters of the same size
- > 40-fold increase of manual force due to special joint design
- > with a gripping surface below the joint for gripping and pulling wires with a diameter from 1.0 mm
- > induction-hardened precision blades, cutting edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

71 01 250

straight blades

71 31 250

blades with recess for easier cutting of larger cross-sections thanks to better leverage close to the fulcrum



71 01 250



71 31 250

CoBolt® XL

Product video



Two-hand operation for maximum cutting force

| Article No. | EAN | ↔ mm | Pliers | Handles | Cutting capacities | | | ⚖ g |
|-------------|--------|------|----------------------|----------------|--------------------|------|------|-----|
| | | | | | ○ mm | ◐ mm | ● mm | |
| 71 01 250 | 079637 | 250 | ✂ black atramentized | plastic coated | 5.6 | 4.0 | 3.8 | 465 |
| 71 31 250 | 079644 | 250 | ✂ black atramentized | plastic coated | 6.0 | 4.3 | 4.2 | 465 |

Bolt Cutters

cut hard components up to 48 HRC

71
72

- > cutting capacity up to 48 HRC hardness
- > robust cutting edges are additionally induction hardened, cutting-edge hardness approx. 62 HRC
- > forged-in stopper with comfortable shock-absorber
- > good access due to very flat construction of head and joint area
- > ergonomically angled handles to minimise effort
- > sturdy non-slip two-colour dual component handle sleeves
- > precise adjustment (12 positions) by eccentric bolt
- > high cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > bolted cutter head, replaceable
- > blade: chrome vanadium heavy-duty steel, forged, multi stage oil-hardened
- > joint: special tool steel, forged
- > handle: steel tube, powder-coated



Forged-in stopper with damping inserts: cushions the cutting stroke comfortably

| Article No. | EAN 4003773- | ↔ mm | Head | Handles | Cutting capacities | | | ⚖ g |
|-------------|--------------|--|-------------------|----------------------------|--------------------|----------------|----------------|------|
| | | | | | HRC 19 Ø mm | HRC 40 Ø mm | HRC 48 Ø mm | |
| 71 72 460 | 066750 | 460 | grey atramentized | with multi-component grips | 8 | 6 | 5 | 2100 |
| 71 72 610 | 066767 | 610 | | | 9 | 8 | 7 | 2550 |
| 71 72 760 | 066774 | 760 | | | 11 | 9 | 8 | 4250 |
| 71 72 910 | 066781 | 910 | | | 13 | 10 | 9 | 4950 |
| 71 79 460 | 066804 | Spare cutter head for 71 72 460 complete with screws | | | | | | |
| 71 79 610 | 066811 | Spare cutter head for 71 72 610 complete with screws | | | | | | |
| 71 79 760 | 066828 | Spare cutter head for 71 72 760 complete with screws | | | | | | |
| 71 79 910 | 066835 | Spare cutter head for 71 72 910 complete with screws | | | | | | |

Concrete Mesh Cutter

71
82

- > cutting capacity up to 48 HRC hardness
- > robust cutting edges are additionally induction hardened, cutting-edge hardness approx. 62 HRC
- > forged-in stopper with comfortable shock-absorber
- > good access due to very flat construction of head and joint area
- > ergonomically angled handles to minimise effort
- > sturdy non-slip two-colour dual component handle sleeves
- > precise adjustment (12 positions) by eccentric bolt
- > high cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > bolted cutter head, replaceable
- > blade: chrome vanadium heavy-duty steel, forged, multi stage oil-hardened
- > joint: special tool steel, forged
- > handle: steel tube, powder-coated

71 82 950



The special shape of the mesh cutter head, 71 82 950, enables it to cut structural steel that is lying down flat



| Article No. | EAN 4003773- | ↔ mm | Head | Handles | Cutting capacities | | | ⚖ g |
|-------------|-----------------|--|-------------------|----------------------------|--------------------|----------------|----------------|--------|
| | | | | | HRC 19 Ø mm | HRC 40 Ø mm | HRC 48 Ø mm | |
| 71 82 950 | 066798 | 950 | grey atramentized | with multi-component grips | 11 | 9 | 6 | 4060 |
| 71 89 950 | 066842 | Spare cutter head for 71 82 950 complete with screws | | | | | | |

Bolt End Cutting Nippers

high lever transmission
DIN ISO 5743

61



Extraordinary cutting performance: also for piano wire



Particularly efficient for fence construction



Almost flush cutting of bolts, nails etc.

Powerful, compact, comfortable

- > compared to conventional lever-assisted end cutting nippers, greater cutting capacity, less effort required and better handling
- > for all classes of wire including piano wire
- > exceptional cutting capacity due to high-leverage joint
- > cutting edges additionally induction hardened; cutting edge hardness approx. 64 HRC
- > Vanadium steel, forged, multi stage oil-hardened

61 02 200

with slim two-colour multi-component sleeves without collar for better handling and easier transport; with large contact surface on the handles for better allotment of pressure and more comfort at work



61 01 200

∠85°



61 02 200

∠85°

| Article No. | EAN 4003773- | ↔ mm | ∠85° | Pliers | Head | Handles | Cutting capacities | | | | g |
|-------------|--------------|------|------|--------------------|----------|---------------------------------|--------------------|------|------|------|-----|
| | | | | | | | ∅ mm | ∅ mm | ∅ mm | ∅ mm | |
| 61 01 200 | 033172 | 200 | ∠85° | black atramentized | polished | plastic coated | 1.0 - 6.0 | 4.0 | 3.5 | 3.0 | 435 |
| 61 02 200 | 067047 | 200 | ∠85° | black atramentized | polished | with slim multi-component grips | 1.0 - 6.0 | 4.0 | 3.5 | 3.0 | 435 |

High Leverage End Cutting Nippers

DIN ISO 5748

67

- > with cutting edges for soft, hard and piano wire
- > high cutting capacity with little effort due to optimum co-ordination of cutting edge angle and transmission ratio
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



67 01 200

| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Cutting capacities | | | | g | |
|-------------|--------------|------|--------|--------------------|----------|----------------------------|------|------|------|-----|-----|
| | | | | | | ∅ mm | ∅ mm | ∅ mm | ∅ mm | | |
| 67 01 140 | 043690 | 140 | | | | 4.0 | 3.1 | 2.0 | 1.5 | 152 | |
| 67 01 160 | 040620 | 160 | ∠85° | black atramentized | polished | plastic coated | 4.5 | 3.4 | 2.5 | 2.0 | 237 |
| 67 01 200 | 040637 | 200 | ∠85° | black atramentized | polished | plastic coated | 5.0 | 3.8 | 3.0 | 2.5 | 318 |
| 67 05 140 | 017929 | 140 | | | | 4.0 | 3.1 | 2.0 | 1.5 | 176 | |
| 67 05 160 | 017936 | 160 | ∠85° | chrome plated | | with multi-component grips | 4.5 | 3.4 | 2.5 | 2.0 | 266 |
| 67 05 200 | 017943 | 200 | ∠85° | chrome plated | | with multi-component grips | 5.0 | 3.8 | 3.0 | 2.5 | 361 |

End Cutting Nippers

DIN ISO 5748

68

Head shape provides optimised movement when tightening steel mesh knots during reinforced concrete work

- > with cutting edges for soft and hard wire
- > also suitable for twisting and cutting binding wire
- > cutting edges additionally induction hardened, cutting edge hardness approx. 61 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened



68 01 180



68 01 280



| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Cutting capacities | | | |
|-------------|--------------|------|-----------------------|----------|----------------|--------------------|------|------|-----|
| | | | | | | Ø mm | Ø mm | Ø mm | g |
| 68 01 160 | 013792 | 160 | black atramentized | polished | plastic coated | 4.0 | 2.8 | 2.3 | 202 |
| 68 01 180 | 013808 | 180 | | | | 4.0 | 3.2 | 2.5 | 284 |
| 68 01 200 | 013815 | 200 | | | | 4.0 | 3.5 | 2.8 | 319 |
| 68 01 280 | 077664 | 280 | | | | 4.5 | 4.0 | 3.2 | 467 |


End Cutting Nippers

for mechanics

DIN ISO 5748

69


- > with cutting edges for soft, hard and piano wire; also suitable for thin copper wires
- > lap joint
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

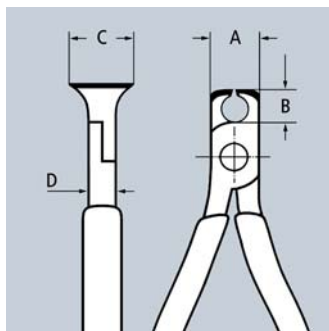

69 01 130




| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | Handles | Cutting capacities | | | | Dimensions | | | | |
|-------------|--------------|------|-----------------------|----------|----------------|--------------------|------|------|------|------------|------|------|------|-----|
| | | | | | | Ø mm | Ø mm | Ø mm | Ø mm | A mm | B mm | D mm | C mm | g |
| 69 01 130 | 017974 | 130 | black atramentized | polished | plastic coated | 0.4 - 2.0 | 1.3 | 1.0 | 0.8 | 16 | 7.5 | 10 | 20 | 111 |
| 69 03 130 | 018001 | 130 | chrome plated | | plastic coated | 0.4 - 2.0 | 1.3 | 1.0 | 0.8 | 16 | 7.5 | 10 | 20 | 111 |

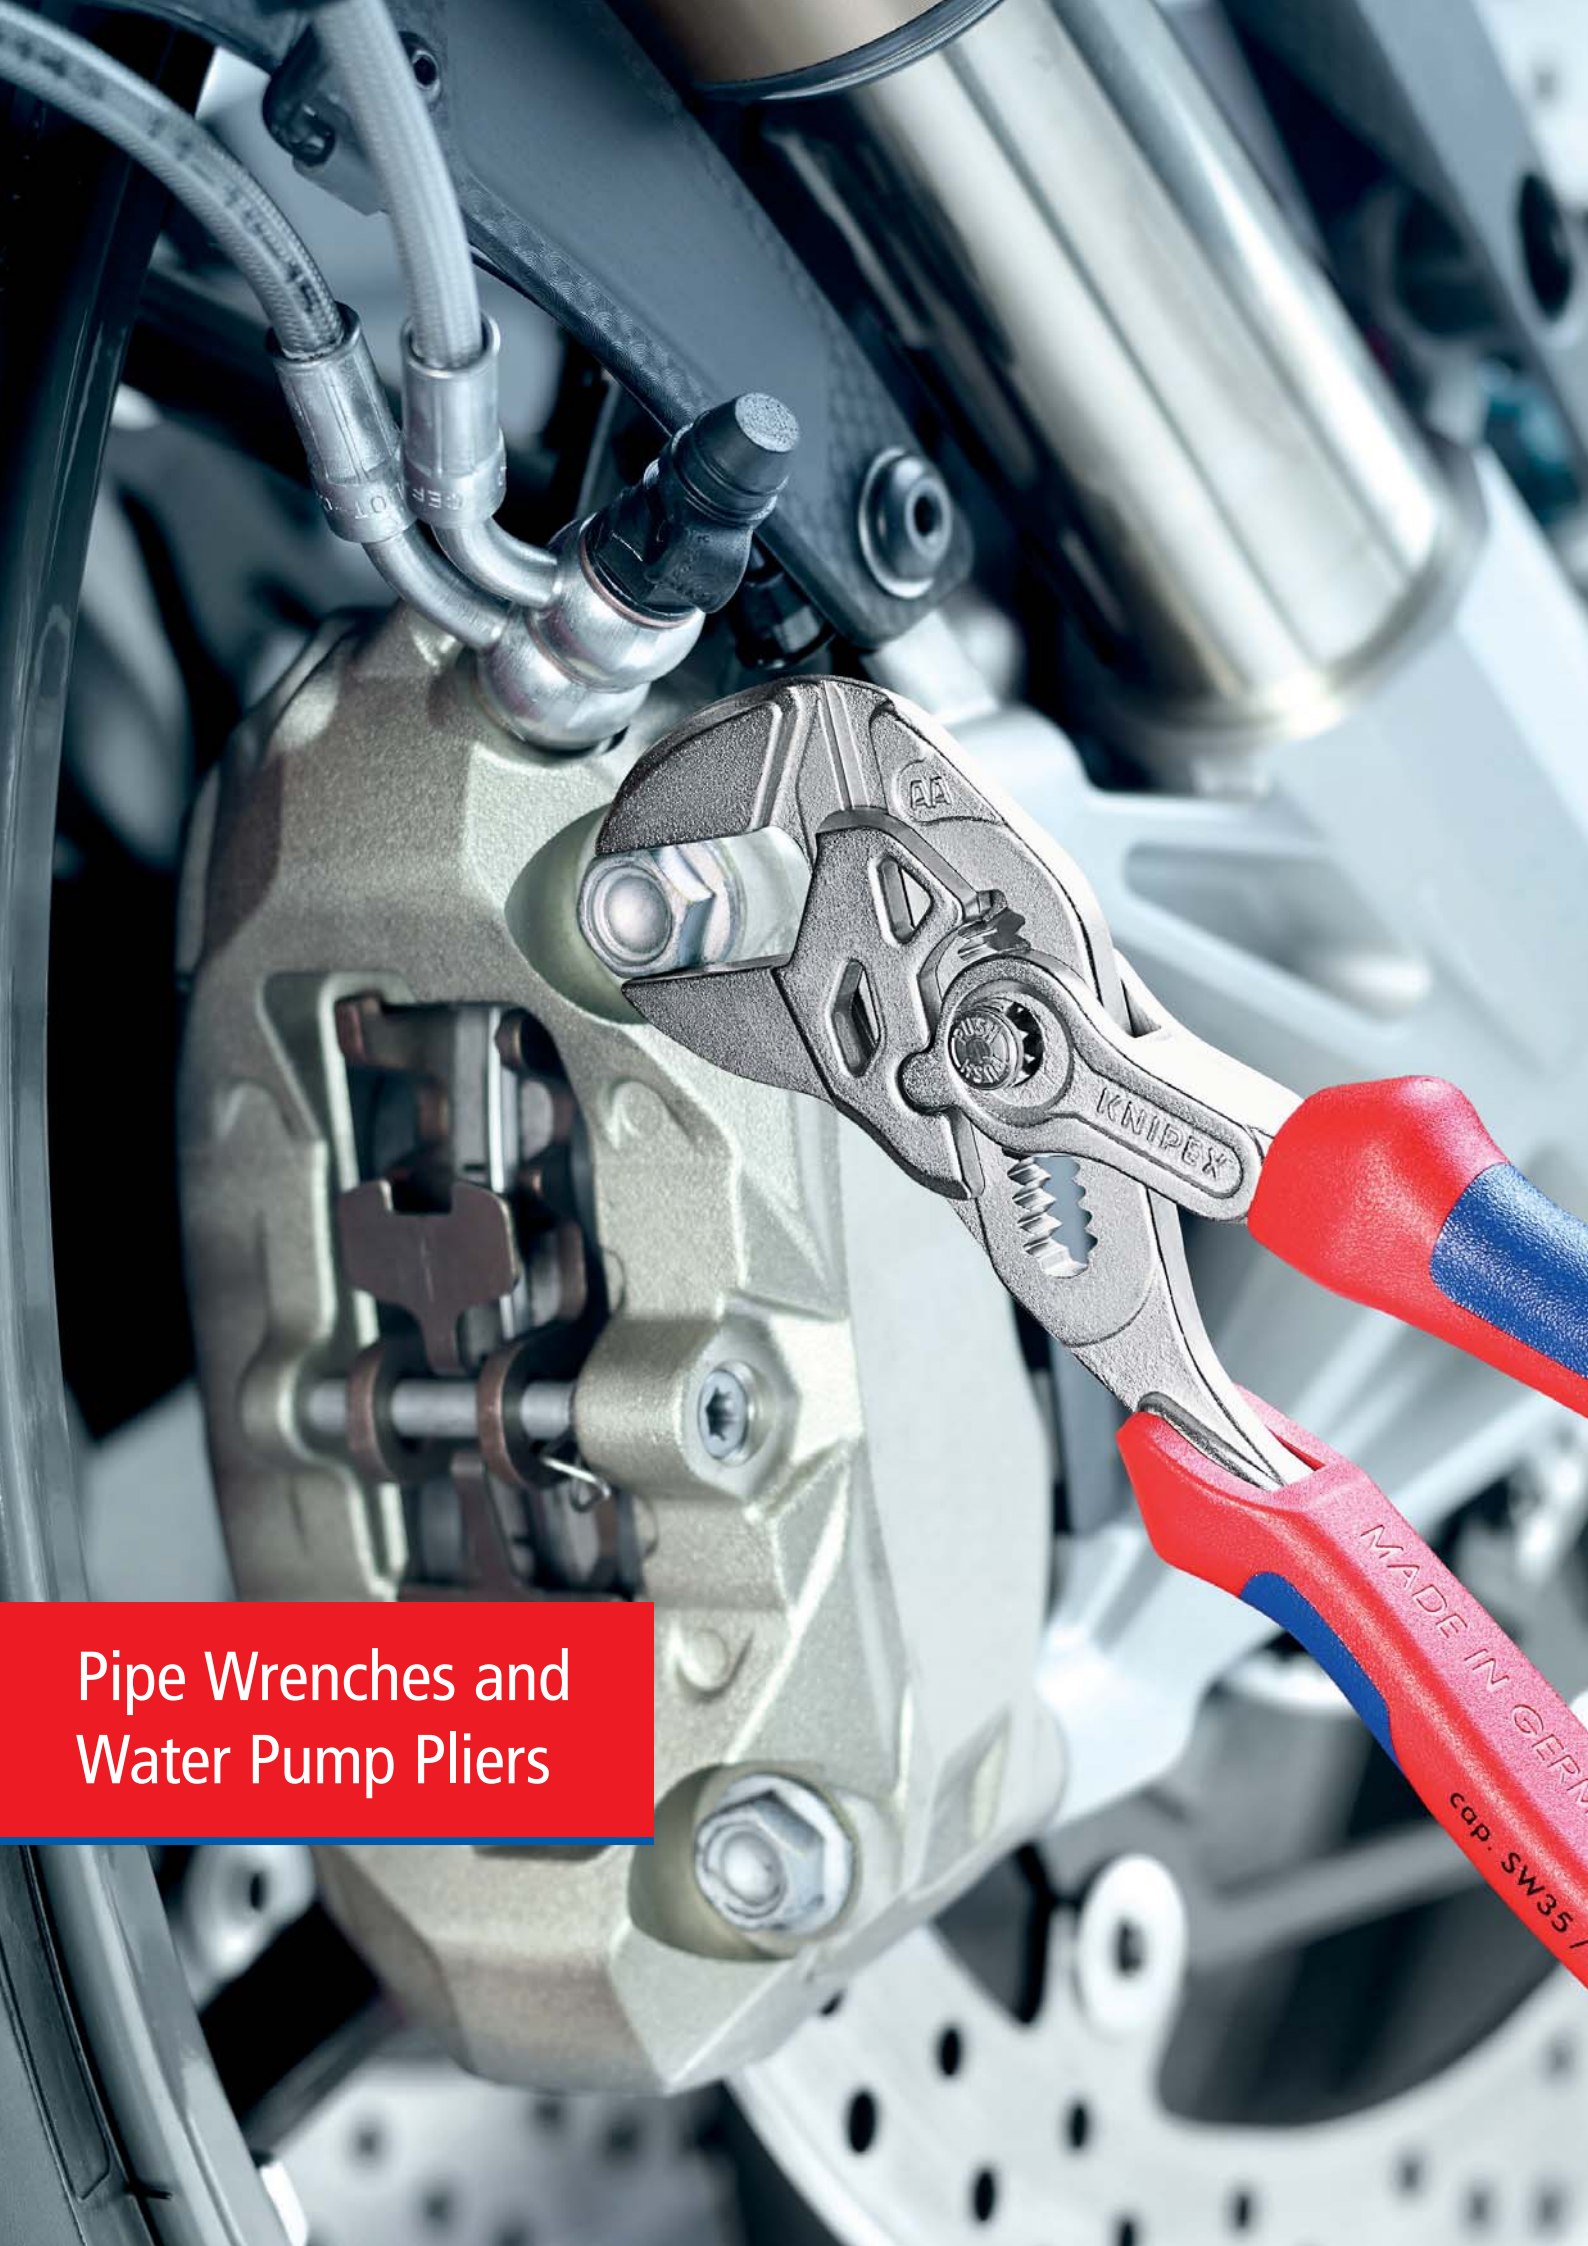

Pipe Wrenches and
Water Pump Pliers

| | |
|---|-----|
| Pliers Wrenches | 112 |
| Set of pliers wrenches | 113 |
| Pliers Wrench XL | 114 |
| Multiple Slip Joint Spanner | 115 |
| Smart Grip® | 115 |
| Cobra® | 116 |
| Cobra® XL / XXL | 118 |
| Cobra® ...matic | 119 |
| Cobra® QuickSet | 120 |
| Cobra® VDE | 121 |
| Cobra® ES | 121 |
| Alligator® | 122 |
| Alligator® XL | 124 |
| Water Pump Pliers with groove joint | 125 |
| Mini Water Pump Pliers with groove joint. | 125 |
| Pipe Wrenches 90° | 126 |
| Pipe Wrenches 45° | 126 |
| Pipe Wrenches S-type | 127 |
| Pipe Wrenches S-Type with rapid adjustment. | 127 |
| Siphon- and Connector Pliers | 128 |

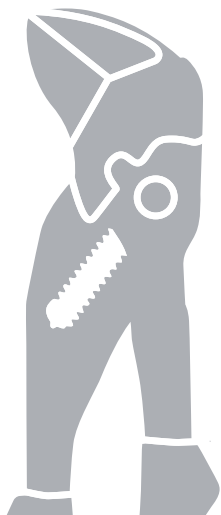

Pliers Wrenches

pliers and a wrench in a single tool

DIN ISO 5743

86

Replaces the need for sets of metric and imperial spanners
Smooth jaws for damage free installation of plated fittings – working directly on chrome!

- > adjustable tightening tool
- > also excellent for gripping, holding, pressing and bending workpieces
- > zero backlash jaw pressure prevents damage to edges of sensitive components
- > adjustment at the touch of a button directly on the workpiece
- > parallel jaws give a more solid grip; the construction gives infinite adjustment of all widths up to the specified maximum size
- > reliable catching of the hinge bolt: no unintentional shifting
- > the action of the jaws allows quick tightening and release of bolted connections using the ratchet principle
- > lever transmission greater than 10 : 1 for strong gripping power
- > Chrome vanadium electric steel, forged, oil-hardened

Length 125 mm

the mini pliers wrench for precision mechanics; particularly suitable for working on small bolted connections; very good access in very confined areas

Length 150 mm


ideal multi-purpose wrench in pocket size; indispensable companion in emergency tool kit

Length 180 mm


with narrow gripping jaws – for tightening situations that require a slim tool

86 05 180 / 86 05 250 T*



Pliers with tether attachment point for mounting a fall protection

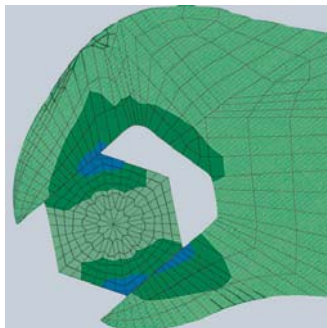

Pliers wrench: zero backlash contact pressure, no damage to edges

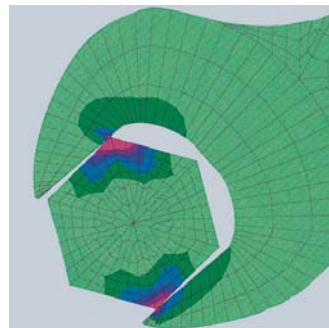

Conventional open end wrench: edge pressure causes surface damage



Fast adjustment by pushing a button



86 03 125



86 03 150



86 03 180



86 05 250



86 05 250 T



86 03 300



The smooth jaws grip all parallel surfaces in the capacity range with a high degree of pressure if necessary and open up almost unlimited application possibilities for the pliers wrench: e.g. for tightening locknuts, exerting pressure to activate the adhesive power of contact adhesives, edge breaking in tile work, snapping cable ties, utilisation as a small vice.



Working on plated fittings without damage of the surface



Replaces the need for sets of metric and imperial spanners



Ideal for bending operations



The mini pliers wrench for precision mechanics


| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Inch | mm | Adjustment positions | Dimensions | | | g |
|-------------|-----------------|---------|---------------|---|-------|----|----------------------|------------|-------|-------|-----|
| | | | | | | | | B1 mm | B2 mm | B3 mm | |
| 86 03 125 | 077497 | 125 | chrome plated | plastic coated | 7/8 | 23 | 11 | 3.0 | 5.0 | 9.5 | 105 |
| 86 03 150 | 069676 | 150 | | | 1 | 27 | 14 | 4.7 | 7.0 | 10.5 | 175 |
| 86 03 180 | 035466 | 180 | | | 1 3/8 | 35 | 13 | 5.0 | 8.0 | 12.0 | 254 |
| 86 03 250 | 033837 | 250 | | | 1 3/4 | 46 | 17 | 8.0 | 8.0 | 14.0 | 536 |
| 86 03 300 | 041429 | 300 | | | 2 3/8 | 60 | 22 | 9.5 | 9.5 | 15.0 | 729 |
| 86 05 150 | 069928 | 150 | chrome plated | with multi-component grips | 1 | 27 | 14 | 4.7 | 7.0 | 10.5 | 193 |
| 86 05 180 | 047162 | 180 | | with multi-component grips | 1 3/8 | 35 | 13 | 5.0 | 8.0 | 12.0 | 277 |
| 86 05 180 T | 080121 | 180 | | with multi-component grips and integrated tether attachment point | 1 3/8 | 35 | 13 | 5.0 | 8.0 | 12.0 | 281 |
| 86 05 250 | 047841 | 250 | | with multi-component grips | 1 3/4 | 46 | 17 | 8.0 | 8.0 | 14.0 | 571 |
| 86 05 250 T | 080138 | 250 | | with multi-component grips and integrated tether attachment point | 1 3/4 | 46 | 17 | 8.0 | 8.0 | 14.0 | 575 |

Set of pliers wrenches

5-piece

00
19

- > tool roll made of hard-wearing polyester fabric
- > with hook and loop fastener
- > Fitted with 1 each of 86 03 125/150/180/250/300

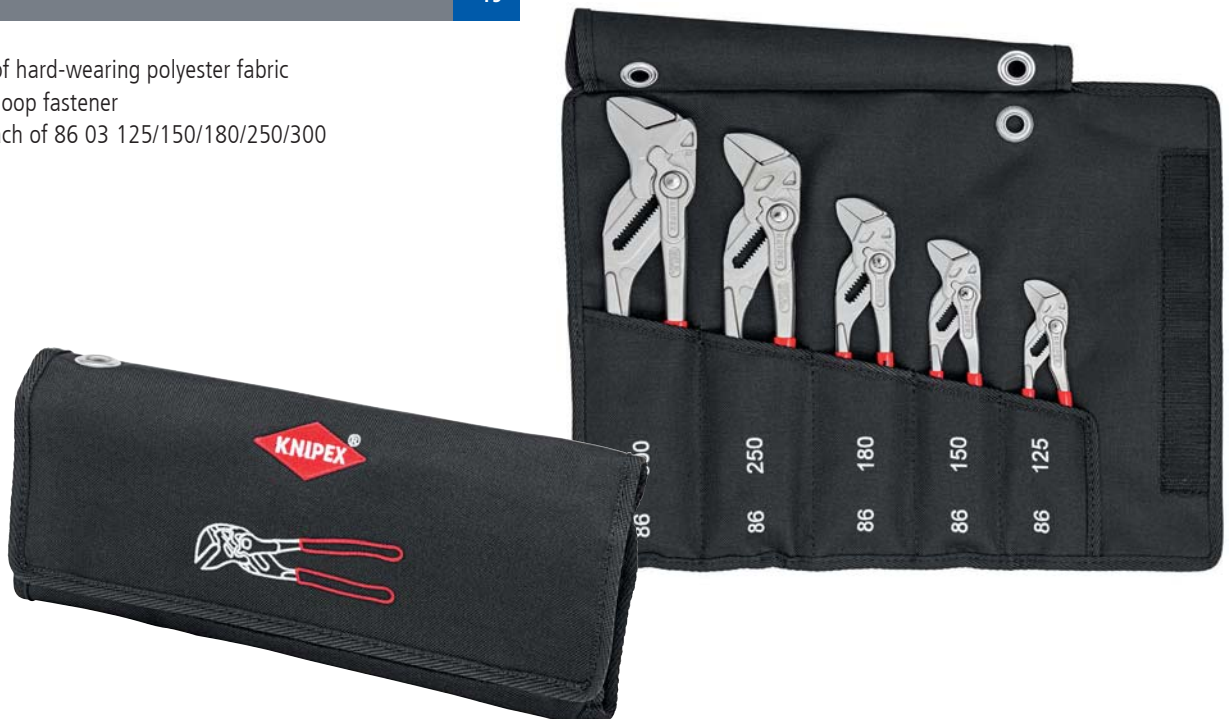

| Article No. | EAN 4003773- | Quantity | g |
|-------------|-----------------|----------|---|
| 00 19 55 54 | 077817 | 1 | 2060 |
| | | | Set of pliers wrenches |
| | | 1 | 86 03 125 KNIPEX Mini pliers wrench, pliers and a wrench in a single tool |
| | | 1 | 86 03 150 Mini Pliers Wrench, pliers and a wrench in a single tool |
| | | 1 | 86 03 180 Pliers Wrench, pliers and a wrench in a single tool |
| | | 1 | 86 03 250 Pliers Wrench, pliers and a wrench in a single tool |
| | | 1 | 86 03 300 Pliers Wrench, pliers and a wrench in a single tool |

* Other tools with tethering can be found from page 254 ff

Pliers Wrench XL

pliers and a wrench in a single tool
DIN ISO 5743

86
03

The unique installation tool now also in 400 mm length
For opening widths up to 85 mm / 3 3/8"

- > excellent for gripping, holding, pressing and bending workpieces
- > optimised adjustment to the workpiece with hand-friendly position of grips
- > reliable catching of the hinge bolt: no unintentional shifting
- > lever transmission greater than 10 : 1 for strong gripping power
- > Chrome vanadium electric steel, forged, oil-hardened



Pliers Wrench XL

adjustable tightening tool – replaces diverse expensive, large open-end wrenches


parallel jaws give a more solid grip; its design allows flexible adjustment up to a maximum size of AF 85 or 3 3/8"

smooth jaws, for damage free installation of quality union joints made from brass, red brass, stainless steel or chrome-plated material

zero backlash jaw pressure prevents damage to edges of sensitive components

the ratchet type principle allows quick and easy tightening and release of bolted connections

push the button for adjustment on the workpiece

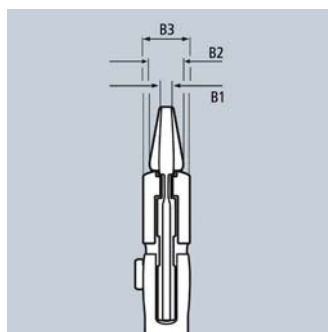

Product video



Product video



| Article No. | EAN | ↔ mm | Pliers | Handles | Inch | mm | Adjustment positions | Dimensions | | | g |
|-------------|----------------|---------|---------------|----------------|-------|----|----------------------|------------|-------|-------|------|
| | | | | | | | | B1 mm | B2 mm | B3 mm | |
| 86 03 400 | 4003773-077312 | 400 | chrome plated | plastic coated | 3 3/8 | 85 | 25 | 12.5 | 16 | 20 | 1460 |

Multiple Slip Joint Spanner

DIN ISO 5743

87
4



Self-locking: no slip on workpieces; less effort required



Fine adjustment by pushing a button: fast and comfortable



In operation on rusted nut with rounded edges

- > for metric and imperial nuts and screws with widths across flats from 10 to 32 mm (3/8" up to 1 1/4"); self-locking from 17 mm: no slipping on the workpiece
- > zero-backlash gripping of metric or imperial hexagonal headed screws, no rounding of bolt heads
- > reliable and tight gripping of rounded, rusty, or thick coated bolts and screws
- > ideal for work on vehicle brake systems
- > quick tightening of bolted connections using ratchet action
- > adjustment at the touch of a button directly on the workpiece, also possible with one hand only
- > fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > box-joint design: high stability because of the double guide
- > reliable catching of the hinge bolt: no unintentional shifting
- > favourable lever action: optimum transmission of force
- > guard prevents operators' fingers being pinched
- > replaces a set of wrenches, ideal for tightening locknuts
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



87 41 250
PATENTED

The Multiple Slip Joint Spanner combines the convenience of the comfortable push-button adjustment on the workpiece and the function of an all-purpose tightening tool. Jaw gripping with zero backlash prevents slipping on the bolt head or rounding edges. Even rusty or thick coated bolted connections which have no surfaces capable of being gripped reliably by a conventional spanner can be managed by the exceptionally powerful closing gripping jaws of this spanner.

| Article No. | EAN | ↔ mm | | Pliers | Head | Handles | Hex Inch | Hex mm | Adjustment positions | g |
|-------------|--------|------|--|-------------------|----------|----------------|-------------|---------|----------------------|-----|
| 87 41 250 | 054566 | 250 | | grey atramentized | polished | plastic coated | 3/8 - 1 1/4 | 10 - 32 | 15 | 328 |

KNIPEX SmartGrip®

Water Pump Pliers with automatic adjustment

DIN ISO 8976

85

- > ideal for frequent changeovers to workpieces of different sizes
- > automatic adjustment per one-hand operation both for right-handed and left-handed use
- > good access to the workpiece thanks to the slim dimensions in the head and joint area and flush joint bolt
- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: low wear and stable gripping
- > box-joint design: high stability because of the double guide
- > guard prevents operators' fingers being pinched
- > locking lever for space saving transport with reliable closed handles
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



85 01 250
PATENTED

Adjustment to suit the workpiece is automatic with the KNIPEX SmartGrip®! Place the outer jaw on the workpiece, squeeze the handles – turn!



| Article No. | EAN | ↔ mm | | Pliers | Head | Handles | Ø Inch | Ø mm | Hex mm | g |
|-------------|--------|------|--|-------------------|----------|----------------|--------|------|--------|-----|
| 85 01 250 | 061304 | 250 | | grey atramentized | polished | plastic coated | 1 1/4 | 32 | 36 | 370 |

KNIPEX Cobra®
 Hightech Water Pump Pliers
 DIN ISO 8976

87
 0

- > adjustment at the touch of a button directly on the workpiece
- > fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: low wear and stable gripping
- > box-joint design: high stability because of the double guide
- > reliable catching of the hinge bolt: no unintentional shifting
- > guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened

87 02 250 / 87 02 250 T* / 87 05 250

with slim two-colour multi-component sleeves without collar for better handling and easier transport

87 02 180 / 87 02 250 / 87 02 300 T*


Pliers with tether attachment point for mounting a fall protection



Fine adjustment by pushing a button: fast and comfortable



Fast and firm adjustment directly on the workpiece



Cobra®



87 01 125



87 01 150



87 01 180



87 01 250



87 01 300



87 02 250



87 02 250 T



87 03 250



87 05 250

KNIPEX Cobra® – the Hightech Water Pump Pliers.

No more time-consuming presetting of the required opening size. Just position the upper jaw to the workpiece, push button and move close the lower jaw, ingeniously simple.





Teeth set against the direction of rotation have a self-locking effect and prevent slipping on the workpiece



Mini-Cobra®

pocket sized tool with full fledged tool function.
Capacity up to 27 mm dia.



Original size

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | ∅ Inch | ∅ mm | ∅ mm | Adjustment positions | g |
|-------------|--------------|------|--|-------------------|----------|--|--------|------|------|----------------------|-----|
| 87 01 125 | 069935 | 125 | | grey atramentized | polished | with non-slip plastic coating | 1 | 27 | 27 | 13 | 85 |
| 87 01 150 | 060116 | 150 | | | | | 1 1/4 | 32 | 30 | 11 | 145 |
| 87 01 180 | 022015 | 180 | | | | | 1 1/2 | 42 | 36 | 18 | 170 |
| 87 01 250 | 022022 | 250 | | | | | 2 | 50 | 46 | 25 | 335 |
| 87 01 300 | 034087 | 300 | | | | | 2 3/4 | 70 | 60 | 30 | 530 |
| 87 02 180 | 042396 | 180 | | grey atramentized | polished | with multi-component grips | 1 1/2 | 42 | 36 | 18 | 196 |
| 87 02 180 T | 080145 | 180 | | | | with multi-component grips and integrated tether attachment point | 1 1/2 | 42 | 36 | 18 | 200 |
| 87 02 250 | 040316 | 250 | | | | with slim multi-component grips | 2 | 50 | 46 | 25 | 366 |
| 87 02 250 T | 080152 | 250 | | | | with slim multi-component grips and integrated tether attachment point | 2 | 50 | 46 | 25 | 370 |
| 87 02 300 | 029144 | 300 | | | | with multi-component grips | 2 3/4 | 70 | 60 | 30 | 580 |
| 87 02 300 T | 080169 | 300 | | | | with multi-component grips and integrated tether attachment point | 2 3/4 | 70 | 60 | 30 | 584 |
| 87 03 125 | 073949 | 125 | | chrome plated | | with non-slip plastic coating | 1 | 25 | 27 | 13 | 85 |
| 87 03 180 | 005667 | 180 | | | | | 1 1/2 | 42 | 36 | 18 | 175 |
| 87 03 250 | 043805 | 250 | | | | | 2 | 50 | 46 | 25 | 314 |
| 87 03 300 | 041382 | 300 | | | | | 2 3/4 | 70 | 60 | 30 | 530 |
| 87 05 250 | 005681 | 250 | | chrome plated | | with slim multi-component grips | 2 | 50 | 46 | 25 | 355 |
| 87 05 300 | 014126 | 300 | | | | with multi-component grips | 2 3/4 | 70 | 60 | 30 | 579 |

* Other tools with tethering can be found from page 254 ff

KNIPEX Cobra® XL/XXL

Pipe Wrenches and Water Pump Pliers

DIN ISO 5743

87
0

- > greater gripping capacity but much lower weight than comparable pipe wrenches
- > fast push-button adjustment directly on the workpiece, no unintentional slipping of the joint
- > fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: low wear and stable gripping
- > box-joint design: high stability because of the double guide
- > guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened

Cobra®

Both the KNIPEX Cobra® XL and XXL offer the performance and comfort of water pump pliers while being lighter in weight and having a greater gripping capacity than comparable pipe wrenches. The Cobra® XL can e.g. grip a 2" pipe fitting and weighs 50% less than a 2" pipe wrench, which has a much lower gripping capacity. With its handy length of 400 mm, the Cobra® XL also fits into a plumber's tool kit. The Cobra® XXL comes along with the weight of a 2" pipe wrench but offers a back-up gripping capacity up to 4 1/2".

87 01 400



87 01 560

Cobra® XL
length 400 mm – weight 1214 g

gripping a union nut of a 2" pipe fitting
large gripping capacity of 95 mm,
would require a 3-inch pipe wrench



smaller dimensions and less weight than 1 1/2" pipe wrenches

2" pipe wrench
length 560 mm – weight 2670 g



gripping the 2" union nut exceeds the capacity of a 2" pipe wrench; no confident working conditions

| Article No. | EAN | ↔ mm | | Pliers | Head | Handles | ∅ Inch | ∅ mm | ∅ mm | Adjustment positions | ⚖ g |
|-------------|--------|------|--|-------------------|----------|----------------|--------|------|------|----------------------|------|
| 87 01 400 | 005636 | 400 | | grey atramentized | polished | plastic coated | 3 1/2 | 90 | 95 | 27 | 1214 |
| 87 01 560 | 044321 | 560 | | grey atramentized | polished | plastic coated | 4 1/2 | 115 | 120 | 20 | 2750 |



KNIPEX Cobra®...matic

Water Pump Pliers
DIN ISO 8976

87
1

> all features of the KNIPEX Cobra® 87 01 250

Special feature:

- > automatic adjustment at the touch of a button directly on the workpiece
- > the sheltered positioned spring ensures that the pliers close automatically once the push-button is activated (one-hand operation!)



87 11 250


| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | ∅ Inch | ∅ mm | ∅ mm | Adjustment positions | ⚖ g |
|-------------|-----------------|----------------------------|---|-------------------|----------|-------------------------------|--------|------|------|-------------------------|--------|
| 87 11 250 | 035473 | 250 |  | grey atramentized | polished | with non-slip plastic coating | 2 | 50 | 46 | 25 | 314 |
| 87 19 250 | 022640 | Spare spring for 87 11 250 | | | | | | | | | |

KNIPEX Cobra® QuickSet

Hightech Water Pump Pliers

DIN ISO 8976

87
2

Fully open, push, grab!

Additional fast adjustment on the workpiece by sliding the pliers handle

- > combines the proven, reliable locking of the hinge bolt with an additional push function which makes it easier to work in very confined and inaccessible areas
- > the adjustment directly on the workpiece is possible by simply sliding the pliers handle
- > securely lock of the hinge bolt with the first workload. The gripping width of the pliers is then fixed and can only be adjusted by pressing the button
- > to re-activate the sliding function, the hinge bolt must be released by pressing the push button and the pliers must be completely opened again
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



87 21 250



87 21 300



87 22 250



Product video



Proven Cobra®-functions

- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width



Press the button – open pliers completely



Press the button – open pliers completely



The hinge bolt locks itself with the first workload



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | ∅ Inch | ∅ mm | ∅ mm | Adjustment positions | g |
|-------------|--------------|------|--|-------------------|----------------------------|--------|------|------|----------------------|-----|
| 87 21 250 | 072775 | 250 | | grey atramentized | plastic coated | 2 | 50 | 46 | 25 | 335 |
| 87 21 300 | 078524 | 300 | | grey atramentized | plastic coated | 2 3/4 | 70 | 60 | 25 | 530 |
| 87 22 250 | 077794 | 250 | | grey atramentized | with multi-component grips | 2 | 50 | 46 | 25 | 364 |

KNIPEX Cobra® VDE

Hightech Water Pump Pliers, insulated
DIN ISO 8976 IEC 60900 DIN EN 60900

87
26

- > adjustment by shifting one jaw directly on to the workpiece: fast, reliable and comfortable handling
- > opening at the touch of a button apart from the workpiece
- > fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > good access to the workpiece due to slim size in the head and joint area
- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: low wear and stable gripping
- > box-joint design: high stability because of the double guide
- > guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



87 26 250

The adjustment action to adapt to the workpiece is easy and reliable with the KNIPEX Cobra® VDE: place the upper gripping jaw of the opened pliers on the workpiece, push pliers to close, done!

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | ∅ Inch | ∅ mm | ∅ mm | Adjustment positions | g |
|-------------|--------------|------|--|---------------|--|--------|------|------|----------------------|-----|
| 87 26 250 | 071495 | 250 | | chrome plated | insulated with multi-component grips, VDE-tested | 2 | 50 | 46 | 24 | 340 |

KNIPEX Cobra® ES


Water Pump Pliers extra-slim
DIN ISO 8976

87
5

- > ideal for service, maintenance and equipment repair, in automotive and general industry
- > long, narrow jaws
- > particularly good access to the workpiece due to very slim construction of head and joint area
- > firm grip also on flat material due to three-point rest
- > adjustment at the touch of a button directly on the workpiece
- > fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > box-joint design: high stability because of the double guide
- > reliable catching of the hinge bolt: no unintentional shifting
- > favourable lever action: optimum transmission of force
- > guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



Very slim design in the complete head and joint area (compared to conventional water pump pliers)

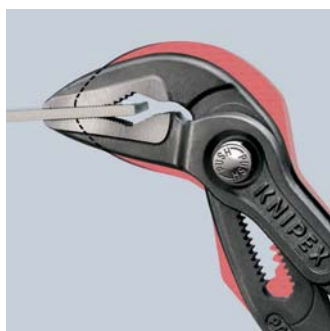

Optimum access to the workpiece. Ideal for service, maintenance and equipment repair, in automotive and general industry



Grips nuts up to 34 mm (1 5/8") across flats



87 51 250

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | ∅ Inch | ∅ mm | ∅ mm | max. parallel opening width in mm | max. gripping depth | Adjustment positions | g |
|-------------|--------------|------|--|-------------------|----------|-------------------------------|--------|------|------|-----------------------------------|---------------------|----------------------|-----|
| 87 51 250 | 061267 | 250 | | grey atramentized | polished | with non-slip plastic coating | 1 1/4 | 32 | 34 | 37 | 42 | 19 | 328 |

KNIPEX Alligator®

Water Pump Pliers

DIN ISO 8976

88

More output and comfort compared to conventional water pump pliers of the same length: 9-notch adjustment positioning for 30% more gripping capacity

Good access to the workpiece due to slim size of head and joint area

- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: low wear and stable gripping
- > box-joint design: high stability because of the double guide
- > robust construction, insensitive to dirt; particularly suitable for outdoor work
- > guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened

88 02 250 / 88 02 250 T* / 88 05 250

with slim multi-component grips without collar for better handling and easier transport

88 02 250 / 88 02 300 T*

Pliers with tether attachment point for mounting a fall protection



Self-locking on pipes and nuts: no slipping on the workpiece; the complete actuating force can be used to turn the workpieces; not having to squeeze the pliers handles reduces the required effort



88 01 180



88 01 250



88 02 250



88 02 250 T



88 05 250



88 06 250
 ⚠️ 1000 V ⚡️




88 07 250
 ⚠️ 1000 V ⚡️

Alligator®



Conventional water pump pliers

Alligator® 250/300

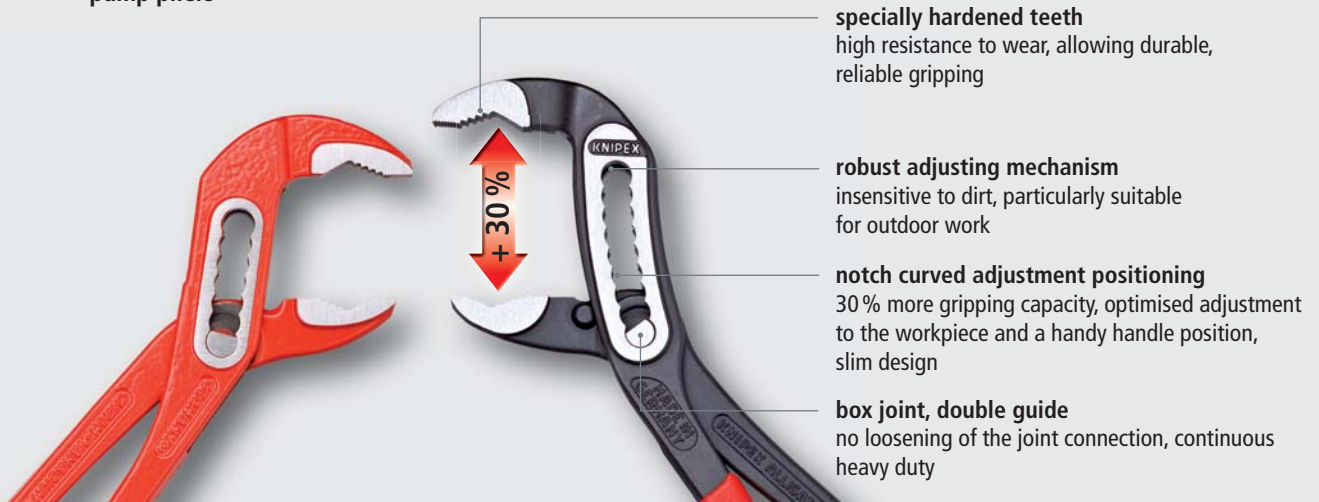

specially hardened teeth
high resistance to wear, allowing durable, reliable gripping

robust adjusting mechanism
insensitive to dirt, particularly suitable for outdoor work

notch curved adjustment positioning
30% more gripping capacity, optimised adjustment to the workpiece and a handy handle position, slim design

box joint, double guide
no loosening of the joint connection, continuous heavy duty

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | ∅ Inch | ∅ mm | mm | Adjustment positions | g |
|-------------|--------------|------|--|---------------|----------|--|--------|------|----|----------------------|-----|
| 88 01 180 | 035480 | 180 | | black | polished | | 1 1/2 | 42 | 36 | 9 | 180 |
| 88 01 250 | 022992 | 250 | | atramentized | polished | plastic coated | 2 | 50 | 46 | 9 | 319 |
| 88 01 300 | 034094 | 300 | | | | | 2 3/4 | 70 | 60 | 9 | 511 |
| 88 02 180 | 044222 | 180 | | | | with multi-component grips | 1 1/2 | 42 | 36 | 9 | 215 |
| 88 02 250 | 019282 | 250 | | | | with slim multi-component grips | 2 | 50 | 46 | 9 | 357 |
| 88 02 250 T | 080176 | 250 | | black | polished | with slim multi-component grips and integrated tether attachment point | 2 | 50 | 46 | 9 | 361 |
| 88 02 300 | 029151 | 300 | | | | with multi-component grips | 2 3/4 | 70 | 60 | 9 | 565 |
| 88 02 300 T | 080619 | 300 | | | | with multi-component grips and integrated tether attachment point | 2 3/4 | 70 | 60 | 9 | 569 |
| 88 03 180 | 042860 | 180 | | chrome plated | | plastic coated | 1 1/2 | 42 | 36 | 9 | 181 |
| 88 03 250 | 005742 | 250 | | | | | 2 | 50 | 46 | 9 | 317 |
| 88 05 180 | 060130 | 180 | | | | | 1 1/2 | 42 | 36 | 9 | 214 |
| 88 05 250 | 035497 | 250 | | chrome plated | | with multi-component grips | 2 | 50 | 46 | 9 | 344 |
| 88 05 300 | 042389 | 300 | | | | | 2 3/4 | 70 | 60 | 9 | 560 |
| 88 06 250 | 039303 | 250 | | chrome plated | | insulated with multi-component grips, VDE-tested | 2 | 50 | 46 | 9 | 374 |
| 88 07 250 | 019343 | 250 | | chrome plated | | with dipped insulation, VDE-tested | 2 | 50 | 46 | 9 | 420 |
| 88 07 300 | 022350 | 300 | | | | | 2 3/4 | 70 | 60 | 9 | 661 |

* Other tools with tethering can be found from page 254 ff

KNIPEX Alligator® XL

Pipe Wrench and Water Pump Pliers

DIN ISO 5743

88

The classic in 400 mm length

Robust construction, insensitive to dirt; particularly suitable for outdoor work

- > good access to the workpiece due to slim size in the head and joint area
- > guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



88 01 400



The KNIPEX Alligator® XL offers the performance and comfort of a water pump pliers while being 50% lighter in weight and having a greater gripping capacity (3 1/2") than comparable pipe wrenches. With their handy length of 400 mm, there is a place for KNIPEX Alligator® XL in every tool box.

Robust pliers for very hard applications


gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: low wear and stable gripping

self-locking on pipes and nuts: no slipping on the workpiece and low handforce required

box-joint design: high stability because of the double guide

robust adjustment mechanism, insensitive to dirt, easy to clean; particularly suitable for outdoor work

11-notch adjustment for a gripping capacity up to 3 1/2", optimised adjustment to the workpiece and a comfortable handle position

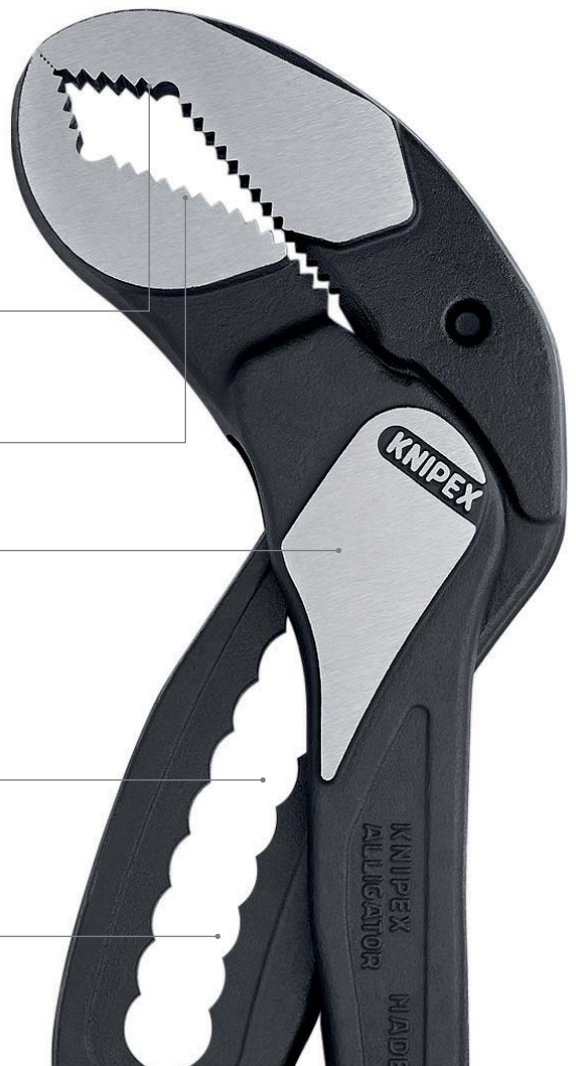

| Article No. | EAN | ↔ mm | | Pliers | Head | Handles | ∅ Inch | ∅ mm | ∅ mm | Adjustment positions | g |
|-------------|--------|------|--|--------------------|----------|-------------------------------|--------|------|------|----------------------|------|
| 88 01 400 | 075844 | 400 | | black atramentized | polished | with non-slip plastic coating | 3 1/2 | 90 | 95 | 11 | 1190 |

Water Pump Pliers

with groove joint

DIN ISO 8976

89

- > self-locking on pipes and nuts: no slipping on the workpiece and low hand force required
- > easy, convenient engagement in 5 different positions due to milled tongue
- > non-slip joint
- > jaw profile designed to fit screws and nuts
- > joint design reduces strain of the centre bolt, hence no wear on pivot
- > guard prevents operators' fingers being pinched
- > gripping surfaces with special hardened teeth
- > teeth hardness approx. 61 HRC for tool length 250 mm: low wear and stable gripping
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



89 01 250



89 03 250



89 05 250



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | ∅ Inch | ∅ mm | ∅ mm | g |
|-------------|--------------|------|--|--------------------|----------|----------------------------|--------|------|------|-----|
| 89 01 250 | 013334 | 250 | | black atramentized | polished | plastic coated | 1 5/16 | 34 | 36 | 340 |
| 89 03 250 | 015086 | 250 | | chrome plated | | plastic coated | 1 5/16 | 34 | 36 | 338 |
| 89 05 250 | 043836 | 250 | | chrome plated | | with multi-component grips | 1 5/16 | 34 | 36 | 371 |

Mini Water Pump Pliers

with groove joint

DIN ISO 8976

90

- > easy, convenient engagement in 4 different positions
- > non-slip joint
- > joint design reduces strain of the centre bolt, hence no wear on pivot
- > Chrome vanadium electric steel, forged, oil-hardened



90 01 125



90 03 125



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | ∅ Inch | ∅ mm | ∅ mm | g |
|-------------|--------------|------|--|--------------------|----------|----------------|--------|------|------|-----|
| 90 01 125 | 035503 | 125 | | black atramentized | polished | plastic coated | 11/16 | 17 | 14 | 103 |
| 90 03 125 | 050490 | 125 | | chrome plated | | plastic coated | 11/16 | 17 | 14 | 105 |

Pipe Wrenches 90°

DIN 5234

83
1

- > Swedish pattern
- > 90° angled jaws
- > jaws with offset teeth in opposite direction
- > teeth additionally induction hardened
- > I-beam handle design
- > captive adjusting nut
- > red powder coated, jaws bright ground
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



83 10 015
∠90°



| Article No. | EAN 4003773- | ↔ mm | | Pliers | ∅ Inch | ∅ mm | ∅ Inch | g |
|------------------|--------------|------|------|-------------------|--------|------|--------|------|
| 83 10 010 | 014188 | 310 | | | 1 5/8 | 42 | 1 | 779 |
| 83 10 015 | 014195 | 420 | | | 2 3/8 | 60 | 1 1/2 | 1415 |
| 83 10 020 | 014201 | 560 | ∠90° | red powder-coated | 2 3/4 | 70 | 2 | 2600 |
| 83 10 030 | 022329 | 650 | | | 4 3/8 | 110 | 3 | 3433 |
| 83 10 040 | 022336 | 750 | | | 5 1/8 | 130 | 4 | 4921 |

Pipe Wrenches 45°

DIN 5234

83
2

- > Swedish pattern
- > 45° angled jaws
- > jaws with offset teeth in opposite direction
- > teeth additionally induction hardened
- > I-beam handle design
- > captive adjusting nut
- > red powder coated, jaws bright ground
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



83 20 015
∠45°



| Article No. | EAN 4003773- | ↔ mm | | Pliers | ∅ Inch | ∅ mm | ∅ Inch | g |
|------------------|--------------|------|------|-------------------|--------|------|--------|------|
| 83 20 010 | 014218 | 320 | | | 1 5/8 | 42 | 1 | 817 |
| 83 20 015 | 014225 | 430 | ∠45° | red powder-coated | 2 3/8 | 60 | 1 1/2 | 1408 |
| 83 20 020 | 014232 | 570 | | | 2 3/4 | 70 | 2 | 2596 |

Pipe Wrenches S-Type

DIN 5234

83

3

- > slim, S-type jaw
- > jaws with offset teeth in opposite direction
- > teeth additionally induction hardened
- > three-point contact on pipes, self-locking
- > I-beam handle design
- > captive adjusting nut
- > red powder coated, jaws bright ground
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



83 30 015



| Article No. | EAN 4003773- | ↔ mm | | Pliers | ∅ Inch | ∅ mm | ∅ Inch | ⚖ g |
|-------------|-----------------|---------|--|-------------------|--------|------|--------|--------|
| 83 30 005 | 025221 | 245 | | red powder-coated | 1 1/2 | 35 | 1/2 | 472 |
| 83 30 010 | 014249 | 320 | | | 1 5/8 | 42 | 1 | 836 |
| 83 30 015 | 014256 | 420 | | | 2 3/8 | 60 | 1 1/2 | 1540 |
| 83 30 020 | 014263 | 540 | | | 2 3/4 | 70 | 2 | 2669 |
| 83 30 030 | 014164 | 680 | | | 4 3/4 | 120 | 3 | 4366 |

Pipe Wrenches S-Type

with rapid adjustment

83

6

- > time-saving, precise adjustment of the gripping width directly on the workpiece at the push of a button
- > less effort required due to self-locking action
- > no unintentional shifting of the pliers handles
- > guard prevents operators' fingers being pinched
- > maximum load capacity thanks to completely hardened handles
- > high wear resistance due to the additionally hardened teeth
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



83 60 010



83 61 010



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | ∅ Inch | ∅ mm | ∅ Inch | ⚖ g |
|-------------|-----------------|---------|--|--------------------|----------------|--------|------|--------|--------|
| 83 60 010 | 075424 | 330 | | red powder-coated | | 1 5/8 | 42 | 1 | 955 |
| 83 60 015 | 075677 | 420 | | | | 2 3/8 | 60 | 1 1/2 | 1470 |
| 83 60 020 | 078838 | 560 | | | | 2 3/4 | 70 | 2 | 2420 |
| 83 61 010 | 077602 | 330 | | grey powder-coated | plastic coated | 1 5/8 | 42 | 1 | 955 |
| 83 61 015 | 077619 | 420 | | | | 2 3/8 | 60 | 1 1/2 | 1470 |
| 83 61 020 | 077602 | 560 | | | | 2 3/4 | 70 | 2 | 2480 |

Siphon- and Connector Pliers

for traps, tube fittings and connectors

DIN ISO 5743

81

For siphons, tube fittings and connectors up to 80 mm diameter

Fine adjustment for ideal adjustment to diverse diameters

Robust, heavy duty

- > ideal for tightening and loosening siphon screw connections, plastic pipe fittings and round union nuts
- > for connectors and couplings with screw connection, such as Cannon circular connectors
- > for gentle loosening of hoses on nozzles
- > 25 adjustment positions, box-joint design
- > ergonomic handle geometry
- > Chrome vanadium electric steel, forged, oil-hardened

81 01 250 / 81 03 250

with serrated gripping jaws; up to Ø 80 mm

81 11 250 / 81 13 250

with exchangeable plastic jaws for sensitive surfaces; up to Ø 75 mm



81 01 250



81 03 250




81 11 250



81 13 250

Product video

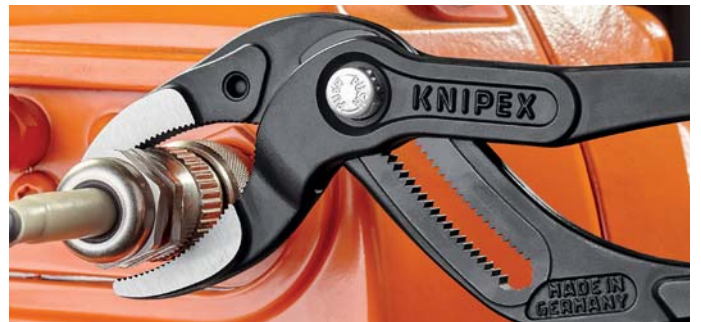

| Article No. | EAN | ↔ mm | | Pliers | Head | Handles | Working Capacity Ø mm | Adjustment positions | ⚖ g |
|-------------|--------|------|--|--------------------|----------|----------------------------------|--------------------------|-------------------------|-----|
| 81 01 250 | 078463 | 250 | | black atramentized | polished | with non-slip plastic coating | 25 - 80 | 25 | 355 |
| 81 03 250 | 078487 | 250 | | chrome plated | | | 25 - 80 | 25 | 355 |
| 81 11 250 | 078470 | 250 | | black atramentized | polished | | 10 - 75 | 25 | 355 |
| 81 13 250 | 078494 | 250 | | chrome plated | | | 10 - 75 | 25 | 355 |

81 19 230 050124 2 pairs of plastic jaws for 81 11 250 / 81 13 250





Special Pliers and
Control Cabinet Keys

| | |
|--|-----|
| Ear Clamp Pliers | 132 |
| Cutter for ribbon cable | 133 |
| Mitre Shears for plastic and rubber sections | 133 |
| Vinyl Shears | 134 |
| Shears for KEVLAR® fibres | 134 |
| Combination Shears | 135 |
| Pipe Cutter for plastic conduit pipes and hoses | 135 |
| Pipe Cutter for composite pipes and protective tubes | 136 |
| Pipe Cutter for composite and plastic pipes | 137 |
| Pipe Cutter for plastic conduit pipes | 137 |
| Punch Lock Riveters | 138 |
| Sheet Metal Nibblers | 138 |
| Notching Pliers | 139 |
| Cycle Pliers | 139 |
| Spring Hose Clamp Pliers | 140 |
| Spring Hose Clamp Pliers with retainer | 142 |
| Hose Clamp Pliers for Click clamps | 143 |
| Revolving Punch Pliers | 144 |
| Tile Nibbling Pincer | 144 |
| Upholstery pliers | 144 |
| Tile Breaking Pliers | 145 |
| Pliers for working on glass | 146 |
| Halogen Bulb Exchange Pliers | 147 |
| Magnetic LED Lamp | 147 |
| TwinKey® | 148 |
| Control Cabinet Keys | 149 |



Ear Clamp Pliers

10

Suitable for universal use, for 1-ear and 2-ear clamps (Oetiker system or similar)

- > for the simple and reliable mounting of 1-ear and 2-ear clamps
- > no damage to press points on the ear clamps
- > the slim head permits good accessibility in confined areas
- > versatile use for clamps on CV boots, cooler and fuel lines, air pressure systems, compressors
- > durable and strong
- > High-grade special tool steel, forged, oil-hardened

10 99 I220

especially suitable for universal use thanks to the additional side jaw



10 98 I220



10 99 I220

Product video



10 98 I220



Sealing the fluid hose on the connecting piece



Sealing the pneumatic hose on the quick action coupling




Sealing the hose connection on central lubrication

10 99 I220



Using the front press nib



Sealing the pneumatic hose on the quick action coupling using the side press nib



Using the side press nib



Sealing the fluid hose on the connecting piece using the side press nib

| Article No. | EAN | ↔ mm | Pliers | Head | Handles | ⚖ g |
|-------------|----------------|------|--------------------|----------|----------------|-----|
| 10 98 I220 | 4003773-080749 | 220 | black atramentized | polished | plastic coated | 494 |
| 10 99 I220 | 4003773-080756 | 220 | black atramentized | polished | plastic coated | 494 |

Cutter

for ribbon cable

94
15

- > for crushing-free cutting of ribbon cable up to 56 mm width
- > exchangeable cutting base with try square for rectangular cuts
- > with opening spring and locking device
- > tool body: tool steel, rolled, oil-hardened
- > blade: standard trapezoidal blade, replaceable



94 15 215



| Article No. | EAN 4003773- | ↔ mm | | Tool | Handles | Blade length mm | ⚖ g |
|-------------|-----------------|--|--|---------------|--------------------|--------------------|--------|
| 94 15 215 | 046011 | 215 | | chrome plated | with plastic grips | 56 | 346 |
| 94 19 215 | 046219 | Set with 10 spare blades for 94 15 215 / 94 35 215 | | | | | |

Mitre Shears


for plastic and rubber sections

94
3

- > for crushing-free cutting of plastic, rubber and soft timber sections; also for ribbon cable up to 56 mm width
- > exchangeable cutting base with try square for 45°-cuts and markings for 60°, 75°, and 90°-cuts
- > with opening spring and locking device
- > tool body: special tool steel, rolled, oil-hardened
- > blade: standard trapezoidal blade, replaceable



94 35 215



| Article No. | EAN 4003773- | ↔ mm | | Tool | Handles | Blade length mm | ⚖ g |
|-------------|-----------------|--|--|---------------|--------------------|--------------------|--------|
| 94 35 215 | 046028 | 215 | | chrome plated | with plastic grips | 56 | 397 |
| 94 19 215 | 046219 | Set with 10 spare blades for 94 15 215 / 94 35 215 | | | | | |

Vinyl Shears

also for cable ducts

95
02

- > for cutting and shortening cable ducts, also for plastic material up to 4 mm thickness
- > special lever transmission
- > very effective blade geometry
- > tool body: high-grade chrome vanadium electric steel, oil-hardened
- > blade: special tool steel, oil-hardened



95 02 21
 PATENTED



95 02 21: blade length 110 mm for cutting wide cable ducts

| Article No. | EAN 4003773- | ↔ mm | Tool | Handles | Cutting capacities mm | Blade length mm | ⚖ g |
|-------------|--------------|------|---|----------------------------|-----------------------|-----------------|-----|
| 95 02 21 | 052128 | 275 |  burnished | with multi-component grips | max. 4.0 | 110 | 665 |

Shears

for KEVLAR® fibres

95
03

- > only for cutting fibres of KEVLAR® in optical fibre cables, not recommended for other materials
- > precisely ground blades with serration prevent the fibres from slipping and guarantee a clean cut
- > riveted precision joint, for low-friction movement and smooth and even cutting of the thin KEVLAR® fibres
- > hard-chrome plated, ground surface
- > shears body: chrome vanadium electric steel, oil-hardened
- > user-friendly handles: plastic, impact-proof



95 03 160 SB



KEVLAR® is a registered trademark of E. I. du Pont de Nemours and Company

| Article No. | EAN 4003773- | ↔ mm | Shears | Handles | ⚖ g |
|--------------|--------------|------|---------------|----------------|-----|
| 95 03 160 SB | 043362 | 160 | chrome plated | plastic coated | 85 |

Combination Shears

95
05

- > for cutting cardboard, plastics, aluminium, brass and copper foils
- > not suitable for steel wire or iron sheets
- > precision ground, hardened blades
- > with opening spring and locking device
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint
- > shears body: surgical steel, stainless, vacuum-hardened
- > handles: plastic, impact-resistant

95 05 185

angled shape – for easy execution of long cuttings;
ergonomically shaped plastic handles



95 05 140
MM



95 05 185
∠40° MM



95 05 190
MM

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | g |
|-------------|-----------------|---------|---------|----------|----------------|-----|
| 95 05 140 | 019589 | 140 | MM | polished | plastic coated | 67 |
| 95 05 185 | 060277 | 185 | ∠40° MM | polished | plastic coated | 115 |
| 95 05 190 | 019602 | 190 | MM | polished | plastic coated | 116 |

Pipe Cutter

for plastic conduit pipes and hoses

90
20

- > for cutting thin walled plastic pipes (conduit plastic pipes) and flexible hoses, also with fabric reinforcement, of plastic and rubber up to 25 mm dia. / 1" exterior dia.
- > not suitable for cutting cables
- > with opening spring and locking device
- > tool body: plastic, fibreglass-reinforced
- > blades: special tool steel, oil-hardened, interchangeable



90 20 185
MM



With replaceable blade

| Article No. | EAN 4003773- | ↔ mm | | Cutting capacities Ø mm | g |
|-------------|-----------------|---------------------------|----|----------------------------|-----|
| 90 20 185 | 067122 | 185 | MM | 25 | 172 |
| 90 29 185 | 067139 | Spare blade for 90 20 185 | | | |



Pipe Cutter

for composite pipes and protective tubes

90
25

- > for cutting composite pipes with diameters from 12 to 25 mm and for cutting flexible protective tubes with a diameter of 18 - 35 mm without damaging a potentially pipe inside
- > a calibration arbor can be fitted, for example for Geberit composite pipes with 11.5 and 15 mm dia.
- > tool body: high-grade chrome vanadium electric steel, oil-hardened
- > blades: special tool steel, oil-hardened, interchangeable



90 25 20
 PATENTED






Composite pipes of 12 - 25 mm dia. are cut cleanly and without deformation



Clean cut of protective tubes 18 - 35 mm diameter



| Article No. | EAN 4003773-046004 | ↔ mm 210 | Tool  | Handles | Cutting capacities Composite pipes Ø mm | Cutting capacities Protective tubes Ø mm | Blade length mm |  g |
|-------------|--------------------|--|--|----------------------------|---|--|-----------------|--|
| 90 25 20 | 046004 | 210 |  galvanized | with multi-component grips | 12 - 25 | 18 - 35 | 25 | 332 |
| 90 29 01 | 031932 | Spare blade for 90 25 20 (composite pipes) | | | | | | |
| 90 29 02 | 031949 | 1 pair of spare blades for 90 25 20 (protective pipes) | | | | | | |
| 90 29 15 | 031956 | Calibration arbor for 90 25 20 (Geberit pipes) | | | | | | |



Pipe Cutter

for composite and plastic pipes

90
25

- > for cutting thick walled plastic and composite pipes with diameters from 26 to 40 mm
- > cuts pipes using the ratchet principle in several strokes
- > self-adapting pipe support positions pipes of various diameters correctly for a rectangular cut
- > tool body: high-grade chrome vanadium electric steel, oil-hardened
- > blades: special tool steel, oil-hardened, interchangeable



90 25 40
PATENTED



Clean cut of thick walled plastic and composite pipes



Not suitable for thin-walled plastic pipes.
Please use article number 90 20 185 for these



| Article No. | EAN 4003773- | ↔ mm | | Tool | Handles | Cutting capacities Ø mm | Cutting edge length mm | ⚖ g |
|-------------|-----------------|--------------------------|----|------------|----------------------------|----------------------------|---------------------------|--------|
| 90 25 40 | 045182 | 210 | MM | galvanized | with multi-component grips | 26 - 40 | 40 | 500 |
| 90 29 40 | 045199 | Spare blade for 90 25 40 | | | | | | |

Pipe Cutter

for plastic conduit pipes (electrical installation work)

94
10

- > for clean cutting of plastic pipes (e.g. plastic conduit pipes) with 6 - 35 mm dia.
- > not suitable for cutting cables
- > blade is replaceable and can be retracted from any position
- > low force requirement due to special blade geometry and optimum transmission
- > minimum operator fatigue due to ergonomic handle design and incremental ratchet blade feed
- > housing: die-cast aluminium, red lacquered
- > blade: special tool steel, oil-hardened



94 10 185
MM




| Article No. | EAN 4003773- | ↔ mm | | Body | Cutting capacities Ø mm | Cutting edge length mm | ⚖ g | |
|-------------|-----------------|---------------------------|----|--|----------------------------|---------------------------|--------|--|
| 94 10 185 | 047025 | 185 | MM | die-cast aluminium body, red lacquered | 6 - 35 | 35 | 583 | |
| 94 19 185 | 047032 | Spare blade for 94 10 185 | | | | | | |

Punch Lock Riveters

90
4

- > to join metal section sheets used in dry walling with a lock seam
- > for U- and C-shaped sections with max 1.2 mm metal (2 x 0.6 mm)
- > minimum handforce required due to optimum lever transmission
- > pliers body: special tool steel, rolled, oil-hardened

90 42 250
for one-hand operation

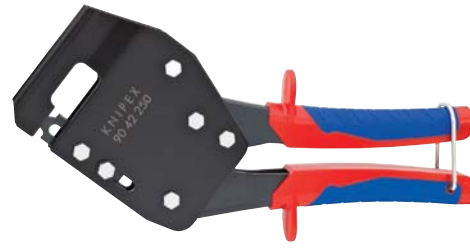

90 42 250
MM



Setting the pliers for connection of two metal section sheets



The punching tool is squeezed through the metal section sheets



90 42 340

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Capacity | ⚖ g |
|-------------|--------------|---------------------------|----|-----------|----------------------------|--------------------|-----|
| 90 42 250 | 047865 | 250 | MM | burnished | with multi-component grips | max. 1.2 (2 x 0.6) | 676 |
| 90 42 340 | 071884 | 340 | | burnished | with multi-component grips | max. 1.2 (2 x 0.6) | 901 |
| 90 49 340 | 028079 | Spare punch for 90 42 340 | | | | | |
| 90 49 340 M | 028499 | Spare punch for 90 42 340 | | | | | |


Sheet Metal Nibbler

90
55

- > for cutting iron, copper or aluminium sheet metal up to max. 1.2 mm thickness, plastic up to max. 2.0 mm thickness
- > materials are cut without deformation
- > clean cut edges – no trimming activities needed
- > with chip breaker
- > easy handling
- > cutting width: 2.7 mm
- > tool body: special tool steel, rolled, oil-hardened
- > blades: special tool steel, oil-hardened, interchangeable



Notching and chip breaking in a single pass



Notching without chip breaking



90 55 280
MM

| Article No. | EAN 4003773- | ↔ mm | | Tool | Handles | ⚖ g |
|-------------|--------------|--------------------------|----|---------------|----------------------------|-----|
| 90 55 280 | 026730 | 280 | MM | nickel plated | with multi-component grips | 461 |
| 90 59 280 | 027355 | Spare blade fo 90 55 280 | | | | |

Notching Pliers

90
61

- > special pliers for notching recesses into plastic ledges and plastic casings for electric and sanitary installation
- > notches can be enlarged by initial and final cut
- > clean cut edges – no trimming activities needed
- > easy handling
- > with opening spring, opening limiter and locking lever
- > pliers body: special tool steel, rolled, oil-hardened



90 61 20
 PATENTED



The KNIPEX Notching Pliers produces the most common notches in plastic ledges and cable ducts in a simple, fast and clean way. No time-consuming sawing out or nibbling and no additional work required.

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Capacity | ⚖ g |
|-------------|--------------|------|---|-----------|--------------------|------------|-----|
| 90 61 16 | 051947 | 250 | M | burnished | with plastic grips | 16 x 32 mm | 403 |
| 90 61 20 | 051954 | 250 | | | | 20 x 29 mm | 414 |

Cycle Pliers

DIN ISO 5743

84

- > for very narrow screw connections
- > Special tool steel, forged, oil-hardened

84 11 200
straight head



84 21 200
20° angled head



84 11 200




84 21 200
 $\angle 20^\circ$ 

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Recess Ø mm | Head thickness mm | ⚖ g |
|-------------|--------------|------|---|--------------------|----------|----------------|-------------|-------------------|-----|
| 84 11 200 | 051923 | 200 |  | black atramentized | polished | plastic coated | 6 / 10 | 3.5 | 177 |
| 84 21 200 | 051930 | 200 | $\angle 20^\circ$  | black atramentized | polished | plastic coated | 6 / 10 | 3.5 | 182 |



Spring Hose Clamp Pliers

85
51

- > rotatable, universal grip inserts for reliably gripping the clamps in all positions
- > extremely good leverage which allows clamps to be opened easily without great effort
- > quick-set adjustment: adjusts by shifting directly onto the workpiece
- > slim head design; narrow head width, rotatable grip inserts: an ideal tool, especially in confined areas
- > can be used for standard, space-saving and spring wire hose clamps and for spring band clamps up to 70 mm nominal size
- > maximum jaw opening 80 mm; over 40 mm clamping range
- > Chrome vanadium electric steel, forged, oil-hardened

85 51 250 A

Product video



The proven features of the Cobra® also apply to the KNIPEX Spring Hose Clamp Pliers

- > less effort required due to extremely good transmission ratio
- > first class guard to prevent fingers being pinched
- > reliable gripping with hand-friendly handle position
- > fine adjustment ensures a precise fit to suit the most diverse clamp sizes
- > opens at the touch of a button
- > box-joint design: high stability due to the double guidance



A single pair of pliers for clamps and spring band clamps of different sizes up to 70 mm. Adapts to all positions due to rotatable grip inserts. Secure position of clamps in the pliers nevertheless guaranteed.

APPLICATION AREAS CARS / TRUCKS:
air intake, cooling, charged air, water return flow, thermostat, fuel, heating

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Capacity | Adjustment positions | ⚖ g |
|-------------|-----------------|---|--|-------------------|-------------------------------|------------|-------------------------|--------|
| 85 51 250 A | 077329 | 250 | | grey atramentized | with non-slip plastic coating | max. 70 mm | 25 | 340 |
| 85 59 250 A | 077336 | Spare parts assortment grip inserts, for 85 51 250 A / 85 51 250 AF | | | | | | |

Spring Hose Clamp Pliers with retainer

85
51

The locking device enables simple and secure work on clamps under tension without effort
One-hand release

- > rotating, universal grip inserts for reliably gripping the clamps in all positions
- > extremely good leverage which allows clamps to be opened easily without great effort
- > slim head design; narrow head width, rotating grip inserts make this an ideal tool, especially in confined areas
- > can be used for standard, space-saving, spring wire hose clamps and for spring band clamps up to 70 mm nominal size
- > maximum jaw opening 80 mm; allows more than 40 mm clamping range
- > Chrome vanadium electric steel, forged, oil-hardened



85 51 250 AF

Product video



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Capacity | Adjustment positions | ⚖ g |
|--------------|-----------------|---|--|-------------------|----------------|------------|-------------------------|--------|
| 85 51 250 AF | 078623 | 250 | | grey agramentized | plastic coated | max. 70 mm | 19 | 350 |
| 85 59 250 A | 077336 | Spare parts assortment grip inserts, for 85 51 250 A / 85 51 250 AF | | | | | | |

Hose Clamp Pliers

for Click clamps

85
51

To open and close Click clamps

- > rotating jaw inserts for the safe actuation of clamps in any position
- good leverage which allows clamps to be opened and closed again comfortably and easily without a great deal of effort
- > for easy working on fuel hoses, vacuum pipes and suction nozzles and many other applications
- > additional function: detach hoses gently using the serrated jaw
- > slim head design; narrow head width, rotating grip inserts make this an ideal tool, especially in confined areas
- > Chrome vanadium electric steel, forged, oil-hardened



85 51 250 C



Product video



Serrated gripping jaws for easy loosening of tight hoses

The proven advantages of the Cobra® also apply to this KNIPEX Hose Clamp Pliers

- > guard prevents operators' fingers being pinched
- > reliable gripping with hand-friendly handle position
- > box-joint design for high stability due to double guide



| Article No. | EAN | ↔ | | | ⚖ |
|-------------|----------------|-----|---|----------------|-----|
| 85 51 250 C | 4003773-078517 | mm | Pliers | Handles | g |
| | | 250 | grey atramentized | plastic coated | 340 |
| 85 59 250 C | 078999 | | Spare parts assortment grip inserts for 85 51 250 C | | |

Revolving Punch Pliers

90
7

- > to punch holes into leather, textiles and plastic material
- > with six interchangeable punches: 2 / 2.5 / 3 / 3.5 / 4 / 5 mm dia.
- > with opening spring and locking device
- > powder-coated for reliable protection against rust
- > pliers body and punches: special tool steel, oil-hardened



Interchangeable punches



90 70 220



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Finish | ⚖ g |
|-------------|-----------------|---------|----|-------------------|---------------|--------|
| 90 70 220 | 019411 | 220 | MM | red powder-coated | powder coated | 251 |

Tile Nibbling Pincer

(Parrot Beak Pincer)

91
0

- > enlarges holes in tiles and forms tile edges
- > Special tool steel, forged, oil-hardened



91 00 200

| Article No. | EAN 4003773- | ↔ mm | Pliers | Head | ⚖ g |
|-------------|-----------------|---------|--------------------|----------|--------|
| 91 00 200 | 013754 | 200 | black atramentized | polished | 158 |

Upholstery pliers

91

- > for the professional fixing of seat covers on profiled seats to the seat frame with all popular upholstery clips
- > Securely insert upholstery clips, guide and hold: the special groove fixes the upholstery clips in the correct position
- > easy positioning of the upholstery clips: a closing spring holds the pliers closed, the clip can be securely positioned and pressed
- > upholstery clips can be easily pressed together due to a good transmission ratio of the pliers
- > user-friendly operation thanks to multi-component grips
- > durable and strong
- > Special tool steel, forged, oil-hardened



91 92 180



| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | ⚖ g |
|-------------|-----------------|---------|-----------------|----------------------------|--------|
| 91 92 180 | 080725 | 185 | mirror-polished | with multi-component grips | 195 |

Tile Breaking Pliers

91

Work without cutting-off machine, particularly for fine strips. For less mess, dust, noise and effort.

For the precise cutting (breaking) of tiles and porcelain stoneware after scoring with a tile cutter

Ideal for long and thick tiles




- > ideal protection of tiles against damage:
 - replaceable positioning jaw made from soft, stable plastic
- > great crushing force thanks to 10-fold increase of manual force
- > easily adjusted to the required tile thickness at the press of a button
- > Chrome vanadium electric steel, forged, oil-hardened




91 13 250



Product video

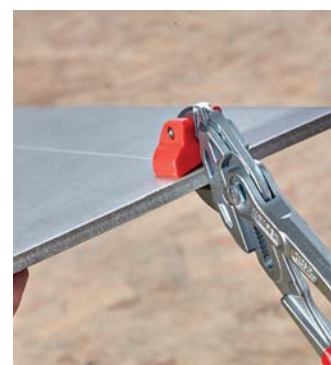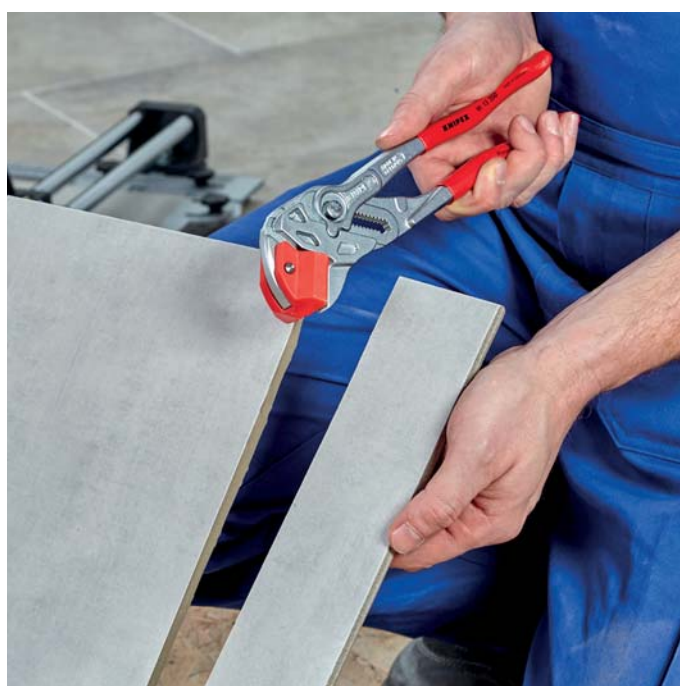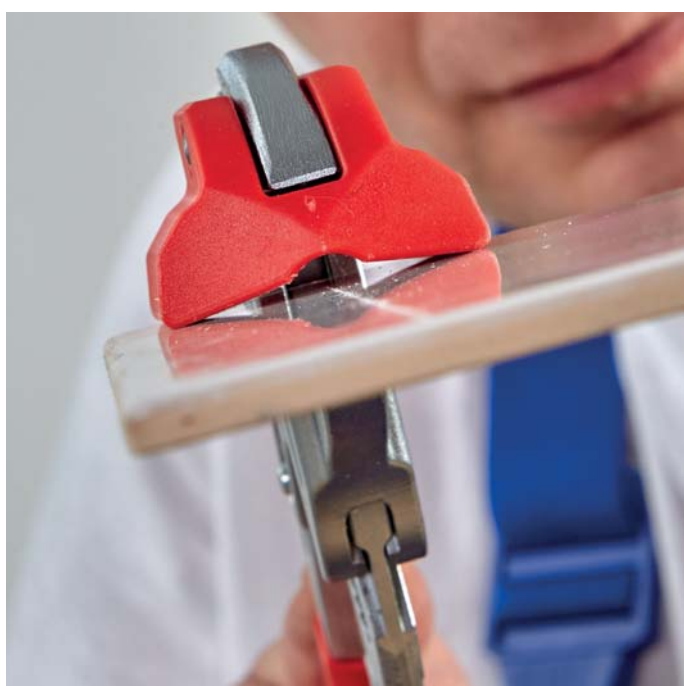

Plastic positioning jaw: tilting for a clean break line and optimum protection of the tiles against damage

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handle | ⚖ g |
|--------------|-----------------|-------------------------|---|---------------|----------------|--------|
| 91 13 250 | 079538 | 250 |  | chrome plated | plastic coated | 560 |
| 91 19 250 01 | 079545 | Spare jaw for 91 13 250 | | | | |

Glass Breaking Pincer

DIN ISO 5743

91

3

- > for breaking glass to a scored line
- > Special tool steel, forged, oil-hardened



91 31 180



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Jaw width mm | ⚖ g |
|-------------|--------------|------|--|--------------------|----------|----------------|--------------|-----|
| 91 31 180 | 069744 | 180 | | black atramentized | polished | plastic coated | 24 | 245 |

Glass Nibbling Pincers

DIN ISO 5743

91

- > for breaking off narrow strips of glass to a scored line
- > for finishing off glass edges to required profile
- > Special tool steel, forged, oil-hardened



91 51 160



91 71 160
narrow version, with opening spring

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Jaw width mm | ⚖ g |
|-------------|--------------|------|--|--------------------|----------|----------------|--------------|-----|
| 91 51 160 | 014355 | 160 | | black atramentized | polished | plastic coated | 9.5 | 148 |
| 91 71 160 | 019565 | 160 | | black atramentized | polished | plastic coated | 4.0 | 141 |

Flat Nose Grozing Pliers

DIN ISO 5743

91

6

- > with soft gripping jaws
- > for trimming glass edges, e. g. when making leaded glass windows
- > Special tool steel, forged, oil-hardened



91 61 160



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Jaw width mm | ⚖ g |
|-------------|--------------|------|--|--------------------|----------|----------------|--------------|-----|
| 91 61 160 | 019527 | 160 | | black atramentized | polished | plastic coated | 9.5 | 141 |

Halogen Bulb Exchange Pliers

30
41

- > for the installation of wedge base bulbs
- > gripping surfaces plastic coated
- > Chrome vanadium electric steel, forged, oil-hardened



30 41 160

| Article No. | EAN | ↔ mm | | Pliers | Head | Handles | ⚖ g |
|-------------|----------------|---------|--|--------------------|----------|----------------|--------|
| 30 41 160 | 4003773-048480 | 160 | | black atramentized | polished | plastic coated | 120 |

Magnetic LED Lamp

Strong. Bright. Compact.

00
11

- > for illuminating dark working areas
- > attachment to tool by means of strong magnets
- > very compact dimensions
- > approx. 24 hours of lighting, with 2 replaceable button cells (CR1220)
- > snap-hook fastening
- > impact-resistant plastic housing



00 11 V50



| Article No. | EAN | ⚖ g |
|-------------|----------------|--------|
| 00 11 V50 | 4003773-075387 | 8 |


KNIPEX TwinKey®

for all standard cabinets and shut-off systems

00
11

10 profiles. 2 crosses. 1 key.
All established locking systems.

- > multifunctional key for the actuation of locking systems from the areas of facilities engineering (heating and sanitation, air conditioning, electro technology), gas and water supply and shut-off-systems
- > 8-arm version: two 4-way spider keys connected in a space-saving way using magnets
- > reversible bit: 1.0 x 7 mm slot and PH2 cross slot
- > key and reversible bit joined by stable stainless steel wire
- > quality surface coating
- > weight-optimised zinc die-cast design

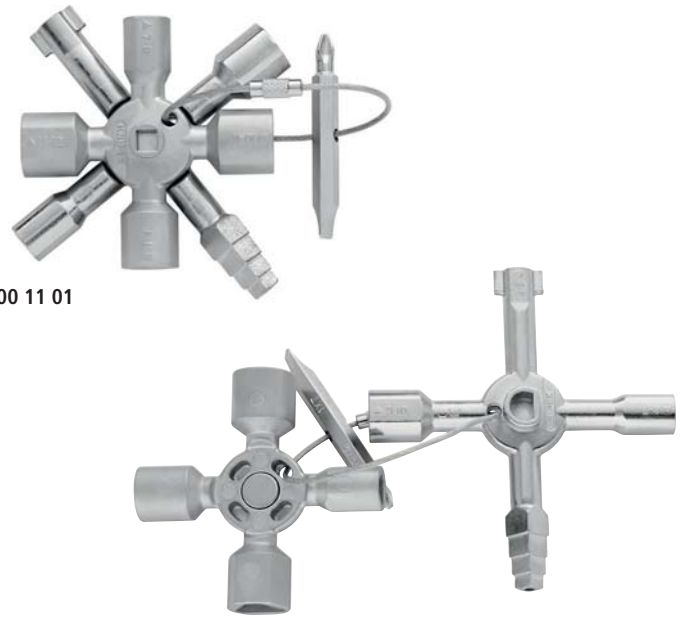



00 11 01

TwinKey®

Well thought out equipment, quality processing.

The KNIPEX TwinKey® has eight arms and consists of two cross keys that are held inside each other with a magnet.

Product video



| Article No. | EAN | ↔ mm | ⊖ Ø mm | ⊖ Ø mm | ⊖ Ø mm | ⊖ Ø mm | ▬ Ø mm | ⚖ g |
|-------------|--------|---------|-----------------------------|--------------------------|-----------|-----------|-----------|--------|
| 00 11 01 | 074670 | 95 | 5 / 6 - 7 / 8 - 9 / 10 - 11 | 7 - 8 / 9 - 10 / 11 - 12 | 3 - 5 | 6 | 6 - 9 | 135 |

Control Cabinet Keys

for all standard cabinets and shut-off systems

00
11

- > for control cabinets and shut-off systems in the supply of gas, water and electricity
- > for technical installations in buildings, e.g. air conditioning and ventilation systems, shut-off valves, mains switchboards, etc.
- > with bit insert: slot 1.0 x 7 mm and cross recess PH2
- > with adapter for 1/4" bits chained to key
- > additional bit adapter for 1/4" bits inside one profile
- > Zinc die-casted

00 11 02

short version, total length 44 mm

00 11 03

long execution, total length 76 mm



00 11 03

| Article No. | EAN 4003773- | ↔ mm | □ mm | △ mm | ○ mm | ⚖ g |
|-------------|--------------|------|-----------|------|-------|-----|
| 00 11 02 | 048947 | 44 | 5 / 6 / 8 | 9 | 3 - 5 | 65 |
| 00 11 03 | 041658 | 76 | 5 / 6 / 8 | 9 | 3 - 5 | 88 |

Profi-Key

for all standard shut-off systems

00
11

- > key for heating, air conditioning, sanitary and building technology, e.g. for door and window handles or for radiator-bleeding
- > with bit insert: slot 1.0 x 7 mm and cross recess PH2
- > with adapter for 1/4" bits chained to key
- > additional bit adapter for 1/4" bits inside one profile
- > total length: 90 mm
- > Zinc die-casted



00 11 04

| Article No. | EAN 4003773- | ↔ mm | □ mm | △ mm | ■ mm | ⚖ g |
|-------------|--------------|------|-----------|--------|---------------|-----|
| 00 11 04 | 048954 | 90 | 5 / 7 / 8 | 9 - 10 | 6 / 7 / 8 / 9 | 86 |

Universal Key

for all standard cabinets and shut-off systems

00
11

- > for locking systems in electrical engineering, the supply of gas and water, air conditioning and ventilation systems, industry, technical installations in buildings, etc.
- > 9 different die-cast zinc key-profiles in 1 tool
- > with detachable chain and snap hook
- > total length: 90 mm
- > Zinc die-casted



00 11 06

| Article No. | EAN 4003773- | ↔ mm | □ mm | △ mm | ○ mm | ○ mm | ⚖ g |
|-------------|--------------|------|------------------------|---------------------|-------|------|-----|
| 00 11 06 | 071334 | 90 | 5 / 6 / 7 - 8 / 9 - 10 | 7 / 8 - 9 / 10 - 11 | 3 - 5 | 6 | 220 |

Universal Key "Construction"

for all standard cabinets and shut-off systems

00
11

- > for locking systems in electrical engineering, the supply of gas and water, air conditioning and ventilation systems, industry, technical installations in buildings, etc.
- > 9 different die-cast zinc key-profiles in 1 tool
- > "Construction" version with plug-in, magnetically held support: catch for locks with profile cylinder hole and male square in steps
- > with bit adapter for 1/4" bits with magnet
- > with detachable chain and snap hook
- > total length: 157 / 95 mm
- > Zinc die-casted



00 11 06 V01

| Article No. | EAN 4003773- | ↔ mm | □ ∅ mm | △ ∅ mm | ○ ∅ mm | ○ ∅ mm | ■ ∅ mm | ⚖ g |
|--------------|--------------|------|------------------------|---------------------|--------|--------|--------------------|-----|
| 00 11 06 V01 | 075394 | 160 | 5 / 6 / 7 - 8 / 9 - 10 | 7 / 8 - 9 / 10 - 11 | 3 - 5 | 6 | 6 / 7 / 8 / 9 / 10 | 255 |

Universal Key

for all standard cabinets and shut-off systems

00
11

- > for locking systems in electrical engineering, the supply of gas and water, air conditioning and ventilation systems, industry, technical installations in buildings, etc.
- > four different zinc die-cast key profiles in a single key
- > with bit adapter for 1/4" bits with magnet
- > total length: 97 mm
- > plastic body, varnished



00 11 06 V02



| Article No. | EAN 4003773- | ↔ mm | ⊠ mm | ⊠ mm | ⊠ mm | ⚖ g |
|--------------|-----------------|---------|---------------|---------|---------|--------|
| 00 11 06 V02 | 075400 | 97 | 5 / 6 / 7 - 8 | 9 | 3 - 5 | 70 |

Pen-Style Control Cabinet Key

for all standard cabinets and shut-off systems

00
11

- > easy to carry pen-style control cabinet key with fastening clip
- > four different key profiles can be utilised by swivelling the key holder
- > for control cabinets and shut-off systems in the supply of gas, water and electricity
- > for technical installations in buildings, e.g. air conditioning and ventilation systems, shut-off valves, mains switchboards, etc.
- > universal 1/4" bit adapter for standard bits (permanent magnet for retaining)
- > additional bit adapter for 1/4" bits inside one key profile
- > with 2 reversible bits: cross recess PH / slot 7.0 x 1.2 mm and TX20 / TX25
- > tool body: plastic, fibreglass-reinforced
- > key profiles: zinc die-casted



00 11 07



| Article No. | EAN 4003773- | ↔ mm | ⊠ mm | ⊠ mm | ⊠ mm | ⚖ g |
|-------------|-----------------|---------|-----------|---------|---------|--------|
| 00 11 07 | 063018 | 145 | 5 / 6 / 8 | 9 | 3 - 5 | 95 |

Pen-Style Profi-Key

for all standard shut-off systems

00
11

- > easy to carry pen-style control cabinet key with fastening clip
- > three different key profiles can be utilised by swivelling the key holder
- > multi-purpose wrench for access on construction sites with profiles for the areas of heating, air conditioning, plumbing and building technology, e.g. for door and window handles or for radiator-bleeding
- > universal 1/4" bit adapter for standard bits (permanent magnet for retaining)
- > additional bit adapter for 1/4" bits inside one key profile
- > with inserted bit: cross recess PH2 and possibility of safekeeping a second bit
- > tool body: plastic, fibreglass-reinforced
- > key profiles: zinc die-casted



00 11 08



| Article No. | EAN 4003773- | ↔ mm | □ mm | △ mm | ■ mm | ⚖ g |
|-------------|-----------------|---------|---------|---------|---------------|--------|
| 00 11 08 | 063025 | 145 | 5 / 8 | 9 | 6 / 7 / 8 / 9 | 142 |

Pen-Style Control Cabinet Key


with voltage and magnetic field detector
for all standard cabinets and shut-off systems

00
11



- > easy to carry pen-style control cabinet key with fastening clip
- > contactless detection of alternating current with optical indication (red LED); range of voltage 50 - 600 V; frequency range 50 - 60 Hz
- > contactless detection of magnetic fields with optical indication (green LED)
- > start button
- > battery saving automatic switch-off. The device switches off automatically after 2 minutes not in use.
- > indicated by means of a bright LED: start-up self test, battery control and live conductor close-by
- > battery case with bayonet catch
- > four different key profiles can be utilised by swivelling the key holder
- > for control cabinets and shut-off systems in the supply of gas, water and electricity
- > for technical installations in buildings, e.g. air conditioning and ventilation systems, shut-off valves, mains switchboards, etc.
- > universal 1/4" bit adapter for standard bits (permanent magnet for retaining)
- > additional bit adapter for 1/4" bits inside one key profile
- > with a reversible bit: cross recess PH / slot 7.0 x 1.2 mm
- > tool body: plastic, fibreglass-reinforced
- > key profiles: zinc die-casted

00 11 17

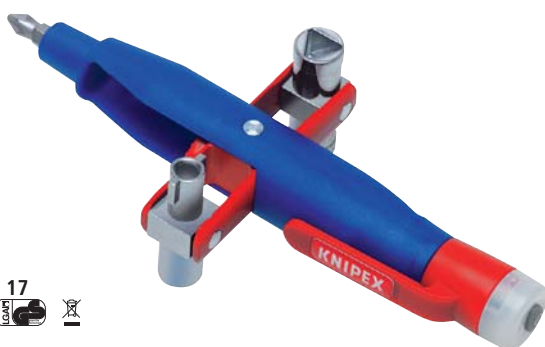


| Article No. | EAN 4003773- | ↔ mm | □ mm | △ mm | ○ mm | ⚖ g |
|-------------|-----------------|---------|---------|---------|---------|--------|
| 00 11 17 | 068396 | 155 | 6 / 8 | 9 | 3 - 5 | 136 |

Cable and Wire Rope Shears



| | |
|-------------------------------------|-----|
| Cable Shears | 154 |
| Cable Shears with twin cutting edge | 155 |
| Electricians Shears | 156 |
| Cable Cutters (ratchet action) | 158 |
| Wire Rope Shears | 162 |
| Bowden Cable Cutter | 163 |
| Wire Rope and Cable Cutters | 163 |

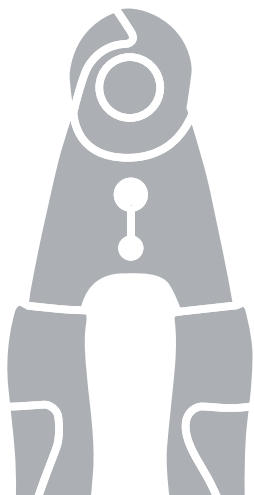

Cable Shears

95

- > for cutting copper and aluminium single conductors as well as multiple stranded cables
- > not suitable for steel wire and hard drawn copper conductors
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > easy cutting with one-hand operation
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint, self-retaining screw
- > High-grade special tool steel, forged, oil-hardened

Style 2
internal opening spring, protected and captive

Style 4
multifunctional tool for working on NYM cable from 3 x 1.5 mm² to 5 x 2.5 mm² (cutting, stripping insulation); universal stripping area for both solid conductor cross-sections; reliable alignment of the cable in the stripping area due to V-shaped blade geometry

95 12 165 T*
Pliers with tether attachment point for mounting a fall protection



Cut performed with a Diagonal Cutter: high effort required, inaccurate cut, considerable deforming and crushing of the cable



Cut performed with a Cable Shear: easy, clean cut without any deformation of the cable



95 41 165: with stripping function



The locking device keeps shears with spring inside the joint closed



95 11 165



95 12 165



95 12 165 T



95 16 165
▲ 1000 V



95 22 165



95 41 165

| Article No. | EAN 4003773- | ↔ mm | Icons | Style | Tool | Handles | Cutting capacities | | | g |
|-------------|--------------|------|----------------|-------|---------------|---|--------------------|-----------------|-----|-----|
| | | | | | | | Ø mm | mm ² | AWG | |
| 95 11 165 | 040323 | 165 | ⊕ ⊕ ⊕ | 1 | burnished | plastic coated | 15 | 50 | 1/0 | 215 |
| 95 12 165 | 029182 | 165 | ⊕ ⊕ ⊕ | 1 | burnished | with multi-component grips | 15 | 50 | 1/0 | 250 |
| 95 12 165 T | 080190 | 165 | ⊕ ⊕ ⊕ | 1 | burnished | with multi-component grips and integrated tether attachment point | 15 | 50 | 1/0 | 254 |
| 95 16 165 | 039648 | 165 | ▲ 1000 V ⊕ ⊕ ⊕ | 1 | chrome plated | insulated with multi-component grips, VDE-tested | 15 | 50 | 1/0 | 262 |
| 95 21 165 | 069805 | 165 | ⊕ ⊕ ⊕ | 2 | burnished | plastic coated | 15 | 50 | 1/0 | 215 |
| 95 22 165 | 069812 | 165 | ⊕ ⊕ ⊕ | 2 | burnished | with multi-component grips | 15 | 50 | 1/0 | 254 |
| 95 26 165 | 069980 | 165 | ▲ 1000 V ⊕ ⊕ ⊕ | 2 | chrome plated | insulated with multi-component grips, VDE-tested | 15 | 50 | 1/0 | 275 |
| 95 41 165 | 078609 | 165 | ⊕ ⊕ ⊕ | 4 | burnished | plastic coated | 12 | 35 | 1/0 | 220 |

Cable Shears

with twin cutting edge

95
1

- > for cutting copper and aluminium cables
- > not suitable for steel wire and hard drawn copper conductors
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > by dividing the cutting actions into initial cut (insulating sheath in the front cutting area) and final cut (conductor in the back cutting area), cables up to Ø 20 mm can be cut in one-hand operation
- > less effort required due to favourable lever ratio and optimised cutting-edge geometry
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint, self-retaining screw
- > High-grade special tool steel, forged, oil-hardened



Initial cut: using the front cutting edge to cut the insulating sheath on larger cable diameters leaves an ergonomic handle opening width.



Final cut: after cutting the sheath in the front profile the conductors in the rear part are cut. Initial cut in the front profile, final cut in the rear profile – to keep it as easy as possible.



95 11 200
PATENTED



95 12 200
PATENTED



95 16 200
1000 V PATENTED



95 17 200
1000 V PATENTED

The twin cutting edge allows a comfortable handle position in all cutting situations within the specified cutting capacity.

| Article No. | EAN 4003773- | ↔ mm | Icons | Tool | Handles | Cutting capacities | | | g |
|-------------|--------------|------|--------------|---------------|--|--------------------|-----------------|-----|-----|
| | | | | | | Ø mm | mm ² | AWG | |
| 95 11 200 | 043928 | 200 | ⊕ ⚡ | burnished | plastic coated | 20 | 70 | 2/0 | 283 |
| 95 12 200 | 047834 | 200 | ⊕ ⚡ | burnished | with multi-component grips | 20 | 70 | 2/0 | 324 |
| 95 16 200 | 026761 | 200 | ⚡ 1000 V ⊕ ⚡ | chrome plated | insulated with multi-component grips, VDE-tested | 20 | 70 | 2/0 | 340 |
| 95 17 200 | 026952 | 200 | ⚡ 1000 V ⊕ ⚡ | chrome plated | handles with dipped insulation, VDE-tested | 20 | 70 | 2/0 | 360 |

Cable Shears

95

- > not suitable for steel wire and hard drawn copper conductors
- > precision ground, hardened blades
- > no crushing, slight deformation of the cable only
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint
- > shears body: surgical steel, stainless, vacuum-hardened
- > handles: plastic, impact-proof

95 05 165

cuts cables up to 10 mm dia. / 24 mm²; with opening spring and locking device; blades made of stainless steel; oil-hardened and tempered

95 06 230

for copper single conductors up to 16 mm², multiple stranded wires up to 50 mm², fine stranded up to 70 mm² and aluminium conductors multiple stranded wires up to 70 mm²; easy cutting with one-hand operation due to high transmission ratio; stainless - special grade - steel, oil-hardened and tempered



95 05 165



95 06 230

| Article No. | EAN 4003773- | ↔ mm | Head | Handles | Cutting capacities | | | |
|-------------|-----------------|---------|----------|-------------------------------|--------------------|-----------------|-----|-----|
| | | | | | Ø mm | mm ² | AWG | g |
| 95 05 165 | 019596 | 165 | polished | plastic coated | 10 | 24 | 3 | 111 |
| 95 06 230 | 006305 | 230 | polished | plastic insulated, VDE-tested | 16 | 50 | 1/0 | 274 |

Electricians' Shears



95

Precisely ground blades with fine serration for a clean, non-slip cut
 Cutting edge with integrated cable cutter
 With plastic belt case

- > universal shears for electricians
- > handles with multi-component grips, fibreglass-reinforced
- > cutting edges made from stainless steel, hardness of cutting edges 56 HRC



95 05 155 SB



| Article No. | EAN 4003773- | ↔ mm | g |
|--------------|-----------------|---------|-----|
| 95 05 155 SB | 077725 | 155 | 110 |

Cable Shears

95

Short design, length only 500 mm

Low weight, high leverage

- > for cutting copper and aluminium single conductors as well as multiple stranded cables
- > not suitable for steel wire and wire ropes
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > low weight
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint
- > cutter head: vanadium electric steel, forged, oil-hardened
- > handles: aluminium tube, high-strength

Large cutting capacity: max. 27 mm dia. / 150 mm²95 12 500
95 17 500

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Cutting capacities | | | g |
|-------------|-----------------|---------|--|-----------|--|--------------------|-----------------|-----|------|
| | | | | | | Ø mm | mm ² | AWG | |
| 95 12 500 | 069966 | 500 | | burnished | with multi-component grips | 27 | 150 | 5/0 | 1090 |
| 95 17 500 | 026785 | 500 | | polished | handles with dipped insulation, VDE-tested | 27 | 150 | 5/0 | 1477 |

Cable Shears

95

- > for cutting copper and aluminium single conductors as well as multiple stranded cables
- > not suitable for steel wire and wire ropes
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > favourable lever ratio due to toggle lever
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint
- > bolted cutter head, replaceable
- > cutter head: high-grade chrome vanadium electric steel, forged, oil-hardened
- > handles: steel tube

95 21 600

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Cutting capacities | | | g |
|-------------|-----------------|---|--|----------|--|--------------------|-----------------|-----|------|
| | | | | | | Ø mm | mm ² | AWG | |
| 95 21 600 | 025252 | 600 | | polished | with plastic grips | 27 | 150 | 5/0 | 1836 |
| 95 27 600 | 021797 | 600 | | polished | handles with dipped insulation, VDE-tested | 27 | 150 | 5/0 | 2301 |
| 95 29 600 | 021803 | Spare cutter head for 95 21 600 / 95 27 600 | | | | | | | |

Cable Cutters
(ratchet action)

95
3

- > for cutting copper and aluminium single conductors as well as multiple stranded cables
- > not suitable for steel wire and wire ropes
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > one-hand operation using ratchet principle
- > little handforce required due to very high transmission ratio
- > two-stage ratchet drive for easy cutting
- > simple handling as a result of low weight and compact design – can be used even in confined areas
- > guard prevents operators' fingers being pinched
- > High-grade special tool steel, forged, oil-hardened

95 31 280 / 95 36 280

suitable for aluminium sector cable up to 4 x 150 mm²




95 31 280: Large cutting capacity: max. 52 mm dia. / 380 mm²




Ratchet principle and two-stage ratchet drive for easier cutting



95 31 250/280: fixed handle with support area as an aid to position the cutters on a flat surface

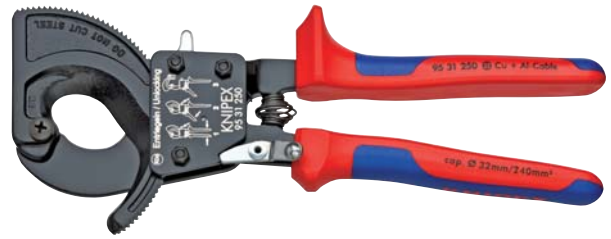

95 31 250
⚡ M M

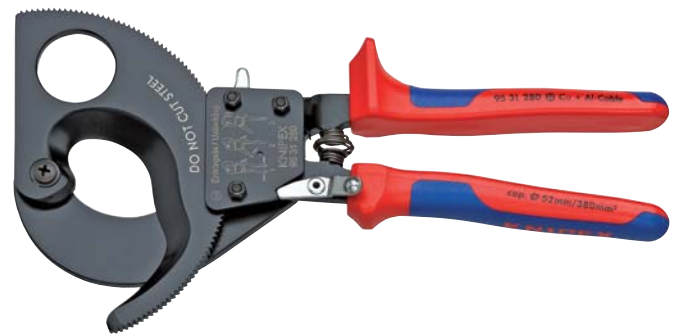

95 31 280
⚡ M M



95 36 250
⚡ 1000V ⚡ M M

Product video
95 36 250



Product video
95 36 280



| Article No. | EAN | ↔ mm | ⚡ M M | Tool | Handles | Cutting capacities | | MCM | ⚖ g |
|-------------|--------|------|---------------|-----------------|--|--------------------|-----------------|-----|-----|
| | | | | | | Ø mm | mm ² | | |
| 95 31 250 | 043935 | 250 | ⚡ M M | black lacquered | with multi-component grips | 32 | 240 | 500 | 676 |
| 95 31 280 | 043942 | 280 | ⚡ M M | black lacquered | with multi-component grips | 52 | 380 | 750 | 860 |
| 95 36 250 | 026884 | 250 | ⚡ 1000V ⚡ M M | black lacquered | insulated with multi-component grips, VDE-tested | 32 | 240 | 500 | 652 |
| 95 36 280 | 026891 | 280 | ⚡ 1000V ⚡ M M | black lacquered | insulated with multi-component grips, VDE-tested | 52 | 380 | 750 | 835 |

95 39 250 022244 Movable spare blade for 95 31 250 / 95 36 250

95 39 280 025283 Movable spare blade for 95 31 280 / 95 36 280

Cable Cutters

(ratchet principle, 3-stage)

95
3

Sturdy. Easy to use. Stable.
Innovative ratchet-drive.
For cable up to 60 mm diameter.

- > easy handling due to low weight (825 g) and compact construction (320 mm length) – also usable in confined areas
- > cutting through copper and aluminium cables with diameters of up to 60 mm in one-hand and two-hand operation
- > hardened cutting edges, precisely ground, cut smoothly and neatly without crushing
- > for cutting copper and aluminium single conductors as well as multiple stranded cables (not suitable for steel wire and wire ropes)
- > innovative three-stage ratchet-drive with high leverage for easy cutting in one-hand and two-hand operation
- > fixed handle with support area for putting down the pliers when cutting
- > High-grade special tool steel, forged, oil-hardened



95 32 320



95 36 320

The innovative three gear drive permits three operating modes:

- > Fast working with full lift of handles and one-handed operation when cutting through insulation material
- > Powerfully sliding the sickle knife forward when cutting through the stranded conductor with two hand through use of the central lifting area (handling opening of between 1/3 and 2/3)
- > Powerfully pushing the sickle knife forward with one hand to cut through the stranded conductor through use of the first third of the handle lift with one or two hands

First manual ratchet-action cable cutter for one-hand and two-hand operation for cutting copper and aluminium cables with diameters of up to 60 mm!

| Article No. | EAN | ↔ mm | | Tool | Head | Handles | Cutting capacities | | | g |
|--------------|----------------|---|--|--------------------|----------|--|--------------------|-----------------|------|-----|
| | | | | | | | Ø mm | mm ² | MCM | |
| 95 32 320 | 4003773-075172 | 320 | | black atramentized | polished | with multi-component grips | 60 | 600 | 1200 | 825 |
| 95 36 320 | 075189 | 320 | | black atramentized | polished | insulated with multi-component grips, VDE-tested | 60 | 600 | 1200 | 830 |
| 95 39 320 01 | 075714 | Pivot cutter repair kit for 95 32 320 and 95 36 320 | | | | | | | | |
| 95 39 320 02 | 075721 | Fixed cutter repair kit for 95 32 320 and 95 36 320 | | | | | | | | |

Cable Cutter

(ratchet action)

for steel wire armoured cables (SWA cable)

95
3

Cuts through steel wire armoured cables with a diameter of up to 45 mm / 380 mm² (e.g. 4 x 95 mm²) using one or two-handed operation

Sturdy. Easy to use. Stable.

- > simple handling due to low weight (800 g) and compact design (315 mm length) – can also be used in confined areas
- > precision ground blades and induction hardened cutting edges cut smoothly and neatly without crushing
- > innovative high leverage three-stage ratchet-drive
- > support area for putting down the pliers when cutting
- > not suitable for cutting ACSR cable and wire rope!
- > High-grade special tool steel, forged, multi stage oil-hardened



95 32 315 A



95 36 315 A



Precision milled and induction hardened cutting edge



Product video



| Article No. | EAN 4003773- | ↔ mm | | Tool | Handles | Cutting capacities | | MCM | g |
|----------------|-----------------|--|--|-----------------|--|--------------------|---------------------|-----|-------|
| | | | | | | Ø mm | mm ² | | |
| 95 32 315 A | 078562 | 315 | | black lacquered | with multi-component grips | 45 | 380 | 750 | 800 |
| 95 36 315 A | 078579 | 315 | | black lacquered | insulated with multi-component grips, VDE-tested | 45 | 380 | 750 | 800 |
| 95 39 315 A 01 | 078586 | Pivot cutter repair kit for 95 32 315 A and 95 36 315 A (ratchet action) | | | | | | | |
| 95 39 315 A 02 | 078593 | Fixed cutter repair kit for 95 32 315 A and 95 36 315 A (ratchet action) | | | | | | | |

Cable Shears

(ratchet action)
with telescopic handles

95
32

Cable shears with adjustable telescopic handles allowing angular positioning

- > for cable diameters up to 38 mm, handles can be positioned at an angle to set the optimum handle width, which makes the shear also suitable for work in confined areas
- > comfortable work thanks to ratchet action and low weight
- > heavy duty telescopic handles made of oval aluminium tubing; extendable up to 770 mm for maximum leverage on large cable diameters; retractable down to 570 mm for minimum space requirements during transport
- > replaceable cutting head
- > extensive cutting range up to max. Ø 38 mm or max. 280 mm² (e.g. 4 x 70 mm² NYN) in copper and aluminium cables
- > easier, neater cut due to optimised cutting-edge geometry
- > adjustable bolted joint
- > cutting head: special quality high-grade tool steel, oil-hardened
- > handles: high-strength oval aluminium tubing



95 32 038

Handles adjustable in length and angular position for easier work: set the handle length to the optimum lever for powerful cutting; put the handles at an angle for a comfortable gripping position

| Article No. | EAN 4003773- | ↔ mm | Head | Handles | Cutting capacities | | | |
|-------------|-----------------|---------------------------------|-----------|----------------------------|--------------------|-----------------|-----|------|
| | | | | | Ø mm | mm ² | MCM | g |
| 95 32 038 | 071556 | 570 | burnished | with multi-component grips | 38 | 280 | 550 | 1980 |
| 95 39 038 | 073260 | Spare cutter head for 95 32 038 | | | | | | |

Cable Cutters

(ratchet action)
with telescopic handles

95
32

- > for copper and aluminium single conductors as well as multiple stranded cables – also with hard rubber or plastic sheath
- > not suitable for steel wire and wire ropes
- > also suitable for cables with iron sheath reinforcement
- > little hand force required for cutting due to optimum transmission ratio
- > high cutting capacity due to two-hand operation and ratchet action
- > the blade can be opened in any cutting position
- > blade: special-quality high-grade tool steel, oil-hardened
- > handles: high-strength oval aluminium tubing
- > handle length with multiple position adjustment from 400 - 610 mm (short transport length, individual adaptation to working conditions)



95 32 060

95 32 060

tool length: 600 - 810 mm; weight only 3820 g

95 32 100

tool length: 650 - 860 mm; weight only 4980 g

| Article No. | EAN 4003773- | ↔ mm | Head | Handles | Cutting capacities | | | |
|-------------|-----------------|--|-----------|----------------------------|--------------------|-----------------|------|------|
| | | | | | Ø mm | mm ² | MCM | g |
| 95 32 060 | 071563 | 600 | burnished | with multi-component grips | 60 | 740 | 1400 | 3820 |
| 95 32 100 | 071570 | 650 | | | 100 | 960 | 1900 | 4980 |
| 95 39 720 | 025290 | Movable spare blade for 95 31 720 / 95 32 060 (ratchet action) | | | | | | |
| 95 39 870 | 025306 | Movable spare blade for 95 31 870 / 95 32 100 (ratchet action) | | | | | | |

Wire Rope Shears

forged

95
6

Double function: neat cutting, precise crimping

- > with two crimping dies for end caps on Bowden cable sheaths and end ferrules for traction cables
- > comfortable work thanks to handy, slim design and internal opening spring
- > bolted joint for precise blade guidance, re-adjustable
- > high leverage for reduced effort
- > cutting-edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

95 62 190 T*

Pliers with tether attachment point for mounting a fall protection



Crimping of the end ferrule onto the traction cable



Crimping of the end caps on the Bowden cable sheath

Precise guiding through a bolted joint




95 61 190



95 62 190



95 62 190 T

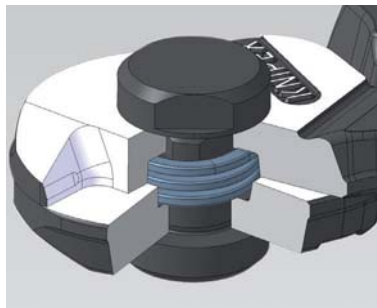

Internal opening spring

Cuts all wire ropes without splaying, including those that are extremely strong

Transport lock and opening limiter



Crimp profiles

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Cutting capacities | | | | g |
|-------------|-----------------|---------|--|----------|---|--------------------|----------|----------|----------|-------|
| | | | | | | Ø mm | Ø mm | Ø mm | Ø mm | |
| 95 61 190 | 040651 | 190 | | polished | plastic coated | 7.0 | 5.0 | 4.0 | 2.5 | 314 |
| 95 62 190 | 071976 | 190 | | polished | with multi-component grips | 7.0 | 5.0 | 4.0 | 2.5 | 314 |
| 95 62 190 T | 080206 | 190 | | polished | with multi-component grips and integrated tether attachment point | 7.0 | 5.0 | 4.0 | 2.5 | 318 |

Bowden Cable Cutter

95
6



- > for Bowden cables and soft wire rope up to 3.0 mm dia. (also V2A)
- > smooth and clean cutting due to special shape of the cutting edges
- > sickle shape cutting edges surround the material and prevent the wire rope fanning out
- > little handforce required due to very high transmission ratio
- > with opening spring and locking device
- > cutting edges additionally induction hardened
- > High-grade special tool steel, forged, multi stage oil-hardened



95 61 150

| Article No. | EAN | ↔ mm | | Shears | Head | Handles | Cutting capacities | | | | |
|-------------|----------|------|--|--------------------|----------|----------------|--------------------|--|--|-----|--|
| | 4003773- | | | | | | | | | | |
| | 065197 | 150 | | black atramentized | polished | plastic coated | Ø mm | | | g | |
| 95 61 150 | | | | | | | 3.0 | | | 205 | |

Wire Rope and ACSR-Cable Cutters

95

- > for wire ropes and steel rods, copper and aluminium cables
- > suitable for cutting overhead cables with strain relief wire (ACSR-cables)
- > angular cutting blades allow cutting of single rope wire
- > optimum transmission ratio for high cutting performance
- > bolted cutter head, replaceable low weight
- > cutter head: high-grade special tool steel, oil-hardened
- > handles: aluminium, high-strength



95 71 600



95 77 600

95 81 600
 with reinforced cutter head for higher performance, also cuts piano wire

| Article No. | EAN | ↔ mm | | Head | Handles | Cutting capacities | | | | AWG | g |
|-------------|----------|------|--|----------|------------------------|--------------------|------|------|------|-----|------|
| | | | | | | | | | | | |
| | 4003773- | | | | | mm ² | Ø mm | Ø mm | Ø mm | | |
| 95 71 445 | 014522 | 445 | | polished | with plastic grips | 95 | 10.0 | 7.0 | | 3/0 | 1083 |
| 95 71 600 | 014539 | 600 | | polished | with plastic grips | 150 | 14.0 | 9.0 | | 5/0 | 1716 |
| 95 77 600 | 025313 | 600 | | polished | with dipped insulation | 150 | 14.0 | 9.0 | | 5/0 | 2359 |
| 95 81 600 | 025344 | 600 | | polished | with plastic grips | 150 | 16.0 | 10.0 | 4.5 | 5/0 | 2256 |

| | | | | | | | | | | | |
|-----------|--------|---|--|--|--|--|--|--|--|--|--|
| 95 79 445 | 025320 | Spare cutter head for 95 71 445 | | | | | | | | | |
| 95 79 600 | 025337 | Spare cutter head for 95 71 600 / 95 77 600 | | | | | | | | | |
| 95 89 600 | 025351 | Spare cutter head for 95 81 600 | | | | | | | | | |

Crimping Pliers and Crimp Assortments



| | |
|---|-----|
| Crimp Grip Pliers | 166 |
| Criming Pliers | 166 |
| Insertion Tool | 167 |
| MultiCrimp® | 168 |
| Crimp System Pliers | 170 |
| eCrimp | 171 |
| Crimping Dies | 172 |
| Locators | 174 |
| Tool Case for Photovoltaics | 174 |
| Tool Case for Photovoltaics MC3 | 175 |
| Mounting Tool for MC3 connectors | 175 |
| Set of Mounting Tools MC4 connectors | 175 |
| Compression Tool | 176 |
| Crimping Pliers for Scotchlok connectors | 176 |
| Crimping Pliers for Western plugs | 176 |
| Crimping Pliers short design | 177 |
| Crimping Pliers also for two-hand operation | 178 |
| PreciForce® | 179 |
| Four-Mandrel Crimping Pliers for turned contacts | 180 |
| Self-Adjusting Crimping Pliers for end sleeves (ferrules) with lateral access | 182 |
| Self-Adjusting Crimping Pliers for end sleeves (ferrules) with front loading | 183 |
| Crimping Pliers for micro plugs | 184 |
| Crimping Pliers for end sleeves (ferrules) | 184 |
| Crimping Pliers for end sleeves (ferrules) with front loading | 185 |
| Crimp Assortments for end sleeves (ferrules) | 186 |
| Crimp Assortments for cable connectors | 187 |
| Cable Connectors | 189 |



Crimp Grip Pliers

97
00

- > for solder-free electrical connections
- > quick release lever
- > high contact pressure with minimum handforce using toggle lever transmission
- > reproducible crimping quality with high tensile strength because of zero point lock
- > adjustable crimping pressure
- > Special steel, high-strength



97 00 215 A



| Article No. | EAN 4003773- | ↔ mm | | | Pliers | Applications | Capacity mm ² | AWG | △ g |
|-------------|--------------|------|--|--|-----------|---|--------------------------|---------|-----|
| 97 00 215 A | 006497 | 215 | | | burnished | insulated terminals and plug connectors | 0.5 - 6 | 20 - 10 | 520 |


Crimping Pliers

97


- > for cutting cables, stripping wire and crimping insulated and non-insulated terminals, connectors and plug type connectors
- > with threaded holes for cutting copper and brass screws threaded M 2.6 / M 3 / M 3.5 / M 4 and M 5
- > bolted joint for higher stability and even movement
- > Special steel, high-strength



97 21 215

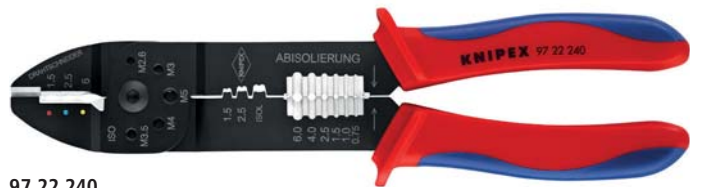

97 22 240

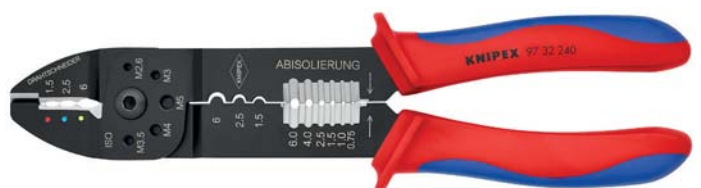

97 32 240



| Article No. | EAN 4003773- | ↔ mm | | | Pliers | Handles | Applications | Capacity mm ² | AWG | △ g |
|-------------|--------------|------|--|--|-----------------|----------------------------|---|--------------------------|---------|-----|
| 97 21 215 | 019688 | 230 | | | black lacquered | with multi-component grips | insulated terminals and cable connectors | 0.75 - 6 | 18 - 10 | 224 |
| 97 21 215 B | 019695 | 230 | | | black lacquered | with multi-component grips | non-insulated open plug-type connectors (plug width 6.3 mm) | 0.5 - 2.5 | 20 - 13 | 290 |
| 97 21 215 C | 019701 | 230 | | | black lacquered | with multi-component grips | uninsulated terminals and cable connectors | 0.5 - 6 | 20 - 10 | 290 |
| 97 22 240 | 070726 | 240 | | | black lacquered | with multi-component grips | insulated terminals and cable connectors | 0.75 - 6 | 18 - 10 | 300 |
| | | | | | | | non-insulated open plug-type connectors (plug width 6.3 mm) | 0.5 - 2.5 | 20 - 13 | 300 |
| 97 32 240 | 079491 | 240 | | | black lacquered | with multi-component grips | insulated terminals and cable connectors | 1.5 - 6 | 15 - 10 | 300 |
| | | | | | | | uninsulated terminals and cable connectors | 0.5 - 6 | 20 - 10 | |

Insertion Tool

for LSA-Plus and identical constructional design

97
40

- > tool for putting on boards, sockets and fields
- > pushing down and cutting in one operation
- > for UTP and STP cables, conductor 0.4 - 0.8 mm dia.
- > with integrated pulling hook and release blade
- > housing: plastic, impact-proof




97 40 10



Putting down and cutting the cable in one operation



With integrated pulling hook

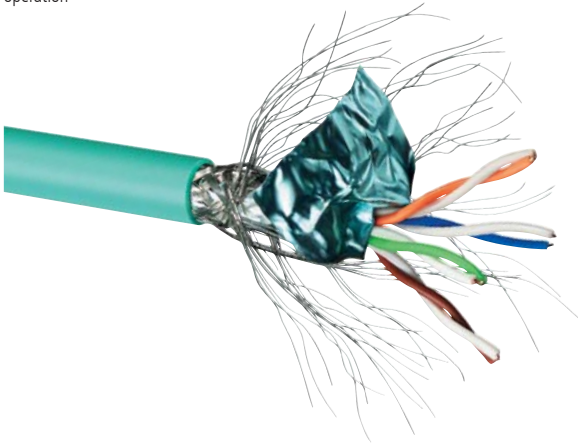

| Article No. | EAN 4003773- | ↔ mm | Head | Applications | Capacity Ø mm | ⚖ g |
|-------------|-----------------|---------|-----------|---|------------------|--------|
| 97 40 10 | 044895 | 175 | burnished | UTP- and STP-cables, LSA-Plus and identical | 0.4 - 0.8 | 100 |



KNIPEX MultiCrimp®
Crimping Pliers with changer magazine

97
33

- > just one tool for the most common crimping applications
- > crimping dies changed quickly and easily without any additional tool
- > sorted and preselected storage of the interchangeable dies in a round magazine
- > comfortable, powerful crimping pliers in professional quality
- > same reliable crimping results as with fixed crimping dies
- > repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > Chrome vanadium electric steel in special quality, oil-hardened
- > round magazine: plastic, fibreglass-reinforced



Changing position: service lever opens out for parallel jaw positioning



Changing the crimping dies: unlock the magazine position, take out the set of dies which the pliers have been pushed on



Fold in the service lever and press the pliers – ready for use again



97 33 01

97 33 01
Crimping pliers with round magazine and three interchangeable crimping die sets for non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) from 0.5 - 6 mm²; for insulated terminals, plug connectors and butt connectors from 0.5 - 6 mm² and for insulated and non-insulated end sleeves (ferrules) from 0.25 - 6 mm²

Now also for insulated and non-insulated end sleeves (ferrules) 10 / 16 / 25 mm²
Universal indent crimping die for non-insulated connectors



97 33 02

97 33 02
Crimping pliers with round magazine and five interchangeable crimping dies for non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) from 0.5 - 6 mm²; for insulated terminals, plug connectors and butt connectors from 0.5 - 6 mm²; for insulated and non-insulated end sleeves (ferrules) from 0.25 - 6 mm²; for insulated and non-insulated end sleeves (ferrules) with 10 / 16 / 25 mm² and for non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267

Compact, inexpensive and light-weight crimping pliers for fitting and repairs. The electrician needs only one tool now instead of five as before.



Magazine for crimping dies can be carried on a belt

Clearly visible marking on the crimping dies with pictograms

| Article No. | EAN 4003773- | ↔ mm | | | Applications | Capacity mm ² | AWG | ⚖ g |
|-------------|--------------|--|--|--|---|---|-----------|-----|
| 97 33 01 | 066927 | 250 | | | non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | 770 |
| | | | | | insulated terminals, plug connectors and butt connectors | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | |
| | | | | | insulated and non-insulated end sleeves (ferrules) | 0.25 - 0.75 1 - 1.5 2.5 4 6 | 23 - 10 | |
| 97 33 02 | 066934 | 250 | | | non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | 870 |
| | | | | | insulated terminals, plug connectors and butt connectors | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | |
| | | | | | insulated and non-insulated end sleeves (ferrules) | 0.25 - 0.75 1 - 1.5 2.5 4 6 | 23 - 10 | |
| | | | | | insulated and non-insulated end sleeves (ferrules) | 10 / 16 / 25 | 7 / 5 / 3 | |
| | | | | | non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267 | 0.5 - 1 1.5 - 2.5 4 - 6 10 | 20 - 7 | |
| 97 39 05 | 070078 | Crimping dies, for non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) | | | | | | |
| 97 39 06 | 070085 | Crimping dies, for insulated terminals, plug connectors and butt connectors | | | | | | |
| 97 39 08 | 070092 | Crimping dies, for insulated and non-insulated end sleeves (ferrules) | | | | | | |
| 97 39 09 | 077763 | Crimping dies, for insulated and non-insulated end sleeves (ferrules) | | | | | | |
| 97 39 13 | 070108 | Crimping dies, for non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267 | | | | | | |
| 97 39 13 A | 077770 | Crimping dies, for non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267 | | | | | | |
| 97 39 30 | 070115 | Crimping dies, for compression joints according to DIN 46267 | | | | | | |
| 97 39 90 | 070061 | Changer Magazine, empty | | | | | | |

Crimp System Pliers
for exchangeable crimping dies

97
43


- > just one tool for almost 1,000 crimping applications
- > almost parallel crimping die movement
- > repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > optimum transmission of force due to lever action for fatigue-reduced operation
- > ergonomically designed handles
- > different locators for precise positioning of the connectors
- > crimping dies for applications not covered in the range offered here, may be available on request
- > Chrome vanadium electric steel in special quality, oil-hardened



97 43 200
MM




97 43 200 with crimping dies 97 49 06 for insulated terminals, plug connectors and butt connectors



97 43 200 with crimping dies 97 49 09 for end sleeves (ferrules)



97 43 200 A
MM (PATENTED)

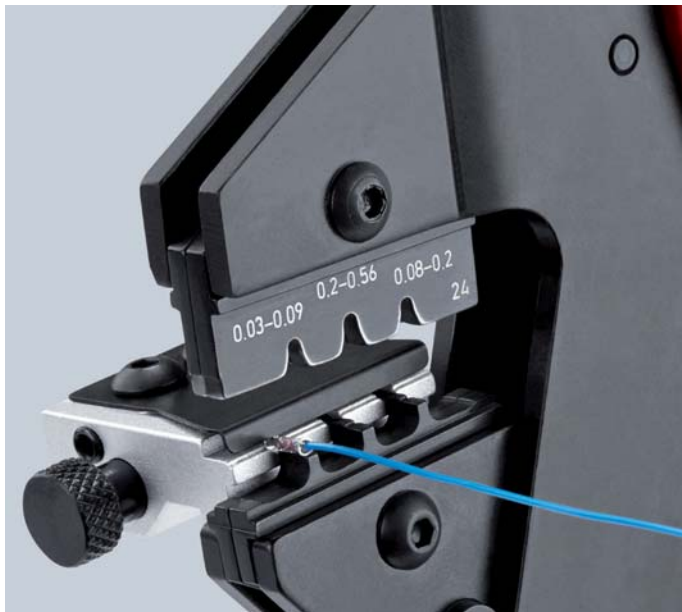

97 43 400 with crimping dies 97 49 24 and locator 97 49 93 for D-Sub plugs

97 43 05

with attached crimping dies for non-insulated open plug-type connectors (4.8 and 6.3 mm connector width)

9743 06

with attached crimping dies for insulated terminals and plug connectors

97 43 200

comes in a plastic case; foam insert with recesses for crimping dies and locators; with service tool (Allen key), screws and nuts; without crimping dies

97 43 200 A

pliers without crimping dies, without case

With the possibility of crimping almost all currently available crimping connections with just one tool and state-of-the-art crimping pliers technology, the crimp system pliers solves almost all tasks in mobile and stationary crimping technology and is an excellent tool for professionals to use for standard crimping.

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Applications | Capacity mm ² | AWG | △ g | |
|-------------|--------------|------|----|-----------|----------------------------|----------------------------|--|---------|---------|-----|
| 97 43 200 | 030812 | 200 | MM | burnished | with multi-component grips | see crimping dies table | | | 988 | |
| 97 43 200 A | 071587 | 200 | MM | burnished | with multi-component grips | see crimping dies table | | | 574 | |
| 97 43 05 | 031031 | 200 | | MM | burnished | with multi-component grips | Crimp System Pliers for non-insulated open plug-type connectors (4.8 and 6.3 mm connector width) | 0.5 - 6 | 20 - 10 | 618 |
| 97 43 06 | 031048 | 200 | | MM | burnished | with multi-component grips | Crimp System Pliers for insulated terminals plug connectors and butt connectors | 0.5 - 6 | 20 - 10 | 610 |

KNIPEX eCrimp

Electromechanical Crimp System Pliers for exchangeable crimping dies

97
43

- > strong electromechanical drive, no hydraulic components, no leakages
- > max. pressing force of the jaws approx. 11 kN
- > ergonomically optimised, user-friendly working height during workshop operation
- > LED working light for targeted illumination of the crimping area
- > low noise level
- > long servicing intervals (up to 25,000 crimping actions)!
The KNIPEX eCrimp is designed to only require servicing after 25,000 crimping actions. This means the intervals between servicing the electromechanical crimping pliers is 2.5 : 1 in relation to conventionally actuated crimping pliers. The pliers are therefore available for crimping use for considerably longer. They do not need to be sent away frequently for servicing. High availability without downtimes while being serviced
- > powerful li-ion rechargeable battery (12 V; 1.5 Ah; 18 Wh); charge time approx. 30 min; no memory effect
- > approx. 170 operating cycles for plug-in connectors with 10 mm² nominal size with a single battery charge
- > tether attachment point to prevent falling during field work



97 43 E

97 43 E

with euro plug

97 43 E AUS



with plug adapter for AS/NSZ 3112 (AUS+NZ)

97 43 E UK

with plug adapter for BS 5733 (GB)

97 43 E US

with plug NEMA 1-15P (USA / Canada / Mexico)



Product video



The KNIPEX eCrimp is the first electromechanically actuated model of crimping pliers in the world. The possible use of over 40 KNIPEX crimping dies and locators as well as more than 1,000 special crimping dies from the proven Crimp System Pliers (97 43 200). Its universal application range makes it an essential tool in the workshop and for rough field work.

| Article No. | EAN | Mains voltage/ frequency | Connector socket | g |
|--------------------|----------------|---|------------------|------|
| 97 43 E | 4003773-076858 | 230 V / 50 Hz | CEE 7/16 | 1960 |
| 97 43 E UK | 076865 | 230 V / 50 Hz | BS 5733 | 1960 |
| 97 43 E AUS | 076872 | 230 V / 50 Hz | AS/NSZ 3112 | 1960 |
| 97 43 E US | 077008 | 120 V / 60 Hz | NEMA 1-15P | 1960 |
| 97 43 E 01 | 076889 | Spare Storage Battery for KNIPEX eCrimp | | |

Crimping Dies


















for Crimp System Pliers















































for different applications

1,000 special crimping dies upon request)




97

49

| Article No. | EAN 4003773- | | Applications | Capacity mm ² | AWG | Capacity SW mm | Sleeves Ø mm |
|-------------|-----------------|---|---|---|--------------------------|-------------------|-----------------|
| 97 49 04 | 030850 |  | non-insulated open plug type connectors (plug width 2.8 + 4.8 mm) | plug width 2.8 mm: 0.1 - 0.25 plug width 2.8 mm: 0.5 - 1 plug width 4.8 mm: 0.5 - 1 plug width 4.8 mm: 1.5 - 2.5 | 27 - 13 | | |
| 97 49 05 | 030867 |  | non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | | |
| 97 49 06 | 030836 |  | insulated terminals, plug connectors and butt connectors | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | | |
| 97 49 07 | 077749 |  | heat shrinkable sleeve connectors | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | | |
| 97 49 08 | 030874 |  | insulated and non-insulated end sleeves (ferrules) | 0.25 - 0.75 1 - 1.5 2.5 4 6 | 23 - 10 | | |
| 97 49 09 | 030881 |  | | 10 / 16 / 25 | 7 / 5 / 3 | | |
| 97 49 10 | 076896 |  | non-insulated tubular cable lugs and crimp terminals in accordance with DIN 46237 and non-insulated butt and crimp connectors in accordance with DIN 46341 | 0.75 / 1.5 / 2.5 0.5 - 0.75 | 13 15 - 17 19 - 20 | | |
| 97 49 11 | 076902 |  | non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267 | 4 / 6 / 10 | 7 / 10 / 11 | | |
| 97 49 14 | 077756 |  | non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267 | 0.5 - 1 1.5 - 2.5 4 - 6 10 | | | |
| 97 49 15 | 043164 |  | plug connectors (plug width 6.3 mm) and non-insulated open plug type connectors (plug width 4.8 mm) | plug width 6.3 mm: 1.25 - 2.5 plug width 4.8 mm: 1.25 - 2.5 plug width 4.8 mm: 3 - 6 | 17 - 13 17 - 10 | | |
| 97 49 16 | 040675 |  | insulated terminals + cable connectors | 10 16 | 7 / 5 | | |
| 97 49 18 | 063186 |  | twin end sleeves | 2 x 6 / 2 x 10 / 2 x 16 | 2 x 10 2 x 7 2 x 5 | | |
| 97 49 19 | 030898 |  | insulated and non-insulated end sleeves (ferrules) | 35 / 50 | 2 / 0 | | |
| 97 49 20 | 045069 |  | F-connectors for TV and satellite connections | | | 7.0 / 8.4 / 8.1 | 7.7 / 9.5 / 9.5 |
| 97 49 23 | 052135 |  | non-insulated terminals + cable connectors | 16 + 25 | 5 + 3 | | |
| 97 49 24 | 030911 |  | D-Sub; HD 20; HDE plugs | 0.03 - 0.09 0.2 - 0.56 0.08 - 0.2 | 32 - 20 | | |
| 97 49 25 | 079798 |  | Micro-Fit™ | 0.35 - 0.75 / 0.5 - 1.0 / 0.2 - 0.5 | 20 / 22-24 / 26-30 | | |

| Article No. | EAN 4003773- | | | Applications | Capacity mm ² | AWG | Capacity SW mm | Sleeves Ø mm |
|-------------|-----------------|---|---|--|--|-----------------|--|------------------------------------|
| 97 49 26 | 079804 |  |  | Mini-Fit® | | 16 / 18 / 20-24 | | |
| 97 49 27 | 079811 |  |  | MQS-Stecker | 0.25 / 0.35 / 0.5 | | | |
| 97 49 30 | 030904 |  |  | compression joints according to DIN 46267 | 1.5 - 4 | 15 - 11 | | |
| 97 49 35 | 034315 |  |  | spark plug connectors and distributors (snap-on sleeves, saw tooth couplings, threaded sleeves, ignition cable sleeves and ignition distributor couplings) | 1 | 17 | | |
| 97 49 40 | 030959 |  |  | Coax connectors RG 58, 59, 62, 71, 223 | | | 5.4 / 6.48 / 1.72 | 6.4 / 7.6 / 2.1 |
| 97 49 44 | 041443 |  |  | rolled contacts | 0.14 - 0.25 0.3 - 0.5 0.75 - 1.5 | 26 - 15 | | |
| 97 49 50 | 030966 |  |  | Coax connectors/Car phone RG 58, 174, 188, 316 | | | 3.25 / 4.52 / 5.4 / 1.72 / 1.07 / 0.72 | 3.9 / 5.4 / 6.4 / 2.1 / 1.3 / 0.95 |
| 97 49 54 | 041450 |  |  | modular plugs | 0.5 - 1 0.5 - 1 1.5 - 2.5 1.5 - 2.5 | 20 - 13 | | |
| 97 49 59 | 073734 |  |  | solar cable connectors Helios H4 (Amphenol) | 2.5 + 4 + 6 | 13 - 10 | | |
| 97 49 60 | 030928 |  |  | turned contacts (HTS + Harting) | 0.14 - 4 | 26 - 11 | | |
| 97 49 61 | 045137 | |  | turned contacts | 1.5 / 2.5 / 4 / 6 | 10/11/13/15 | | |
| 97 49 62 | 063179 |  |  | solar cable connectors (Huber + Suhner) | 2.5 + 4 | 13 + 11 | | |
| 97 49 63 | 066675 |  |  | solar cable connectors (Huber + Suhner) | 4 + 6 | 11 + 10 | | |
| 97 49 64 | 044055 |  |  | ABS connectors in motor vehicles | 1 - 6 | 17 - 10 | | |
| 97 49 65 | 066682 |  |  | solar cable connectors MC3 (Multi-Contact) | 2.5 - 6 | 13 - 10 | | |
| 97 49 66 | 066699 | |  | solar cable connectors MC4 (Multi-Contact) | 2.5 - 6 | 13 - 10 | | |
| 97 49 66 4 | 072096 |  |  | solar cable connectors MC4 (Multi-Contact) | 4 | 11 | | |
| 97 49 66 6 | 072102 | |  | cutting - stripping - crimping | 6 | 10 | | |
| 97 49 67 | 066705 |  |  | solar cable connectors (Hirschmann) | 2.5 - 6 | 13 - 10 | | |
| 97 49 68 | 066712 |  |  | solar cable connectors (Tyco) | 1.5 - 6 | 15 - 10 | | |
| 97 49 69 1 | 072119 |  |  | solar cable connectors gesis® | 1.5 - 2.5 | 15 / 13 | | |
| 97 49 69 2 | 072126 | |  | solar PST 40 (Wieland) | 4 - 10 | 11 - 7 | | |
| 97 49 70 | 030942 |  |  | Western plugs | 4 / 6 / 8-pole RJ 10; 11; 12; 45 | | | |
| 97 49 71 | 075066 |  |  | solar cable connectors MC4 (Multi-Contact) | 4 - 10 | 11 - 7 | | |
| 97 49 72 | 076957 |  |  | solar cable connectors MC3 (Multi-Contact) | | 7 / 10 / 11 | | |

CRIMPING PLIERS

| Article No. | EAN 4003773- | | Applications | Capacity mm ² | AWG | Capacity SW mm | Sleeves Ø mm |
|--------------|--------------|---|---|----------------------------------|-----|--------------------|-----------------|
| 97 49 74 | 044062 |  | unshielded Molex plugs (short design) | 4 / 6 / 8-pole RJ 10; 11; 12; 45 | | | |
| 97 49 76 | 047513 |  | shielded Stewart plugs | | | | |
| 97 49 81 | 042778 |  | fibre optic connectors, e.g. Harting | | | 3.0 / 4.95 / 6.5 | 3.5 / 6.0 / 7.5 |
| 97 49 82 | 042785 | | fibre optic connectors, e.g. Telegärtner | | | 3.25 / 3.65 / 4.52 | 3.6 / 4.0 / 5.4 |
| 97 49 83 | 044079 | | fibre optic connectors, e.g. FSMA-, ST-, SC- + STSC- / K-connectors | | | 3.65 / 4.2 / 5.0 | 4.3 / 5.4 / 6.0 |
| 97 49 84 | 042792 | | fibre optic connectors, e.g. Huber / Suhner | | | 3.8 / 4.3 / 4.95 | 4.5 / 5.2 / 6.0 |
| 97 49 87 | 043331 | | fibre optic connectors, e.g. FSMA-, ST- and MIC-connectors | | | 8.7 | 9.5 |
| 97 49 25 1 | 079828 | Locator for 97 49 25 | | | | | |
| 97 49 26 1 | 079835 | Locator for 97 49 26 | | | | | |
| 97 49 27 1 | 079842 | Locator for 97 49 27 | | | | | |
| 97 49 94 | 030997 | Locator for 97 49 04 / 97 52 04 / 97 52 34 | | | | | |
| 97 49 95 | 031000 | Locator for 97 49 05 / 97 52 05 / 97 52 35 | | | | | |
| 97 49 93 | 047926 | Locator for 97 49 24 (D-Sub-plugs) | | | | | |
| 97 49 59 1 | 073741 | Locator for 97 49 59 (solar cable connectors Helios H4) | | | | | |
| 97 49 90 | 031017 | Locator for 97 49 60 (HTS + Harting) | | | | | |
| 97 49 65 1 | 066729 | Locator for 97 49 65 (solar cable connectors MC3) | | | | | |
| 97 49 66 1 | 066736 | Locator for 97 49 66 (solar cable connectors MC4) | | | | | |
| 97 49 68 1 | 066743 | Locator for 97 49 68 (solar cable connectors Solarlok) | | | | | |
| 97 49 69 1 1 | 072133 | Locator for 97 49 69 1 and 97 49 69 2 | | | | | |
| 97 49 71 1 | 075073 | Locator for 97 49 71 (solar cable connectors MC4) | | | | | |





Tool Case for Photovoltaics

97
91

- > with tools for photovoltaics
- > without crimping dies – please order separately (see ref. 97 49...) for individual assortment
- > with service tools (hexagonal key) for the change of crimping dies
- > shock-resistant plastic case
- > foam insert with recesses for tools, crimping dies and locators
- > dimensions, exterior (W x H x D): 345 x 80 x 280 mm



97 91 01

| Article No. | EAN 4003773- | | | | Quantity |  g |
|-------------|--------------|---|-----------|---|----------|---|
| 97 91 01 | 070351 | | | Tool Case for Photovoltaics | | 1964 |
| | |  | 12 12 11 | Precision Insulation Stripper, with adapted blades | 1 | |
| | |  | 95 16 165 | Cable Shears | 1 | |
| | |  | 97 43 200 | Crimp System Pliers, for exchangeable crimping dies | 1 | |

Tool Case for Photovoltaics, MC3 (Multi-Contact) **97**
91

- > the complete tool set to install MC3 connectors
- > with service tools (hexagonal key) for the change of crimping dies
- > shock-resistant plastic case
- > foam inserts with recesses for the tools, crimping dies and locators
- > with four empty plastic boxes for consumables; for individual equipping
- > dimensions, exterior (W x H x D): 360 x 105 x 300 mm



97 91 02

| Article No. | EAN | | | | Quantity | g |
|-------------|----------------|---------|------------|---|----------|------|
| 97 91 02 | 4003773-074083 | | | Tool Case for Photovoltaics, MC3 (Multi-Contact) | | 3280 |
| | | MM | 12 12 11 | Precision Insulation Stripper, with adapted blades | 1 | |
| | | ⚠ 1000V | 95 16 165 | Cable Shears | 1 | |
| | | MM | 97 43 200 | Crimp System Pliers, for exchangeable crimping dies | 1 | |
| | | ⚡ | 97 49 65 | Crimping dies, for solar cable connectors MC3 (Multi-Contact) | 1 | |
| | | | 97 49 65 1 | Locator for 97 49 65 (solar cable connectors MC3) | 1 | |
| | | | 97 49 65 2 | Mounting Tool for MC3 connectors | 1 | |

Mounting Tool for MC3 connectors **97**

- > for easy and quick assembly of MC3 solar cable connectors
- > for fit solar sleeves for connectors from 2.5 to 10 mm²
- > three capsules (2.5 / 4; 6; 10 mm²) for pulling on the sleeves, integrated in the detachable handle
- > body: plastic, fibreglass-reinforced



97 49 65 2



The assembly tool comes with three torpedo mandrels for the various cable cross-sections

| Article No. | EAN | ↔ mm | Capacity mm ² | g |
|-------------|----------------|------|--------------------------|-----|
| 97 49 65 2 | 4003773-072010 | 325 | 2.5 - 10 | 460 |

Set of Mounting Tools for solar cable connectors MC4 (Multi-Contact) **97**

- > set of two mounting tools
- > to tighten cable glands of MC4 solar plugs
- > to open the locking of MC4 housings (even in case of mounted lock clip)
- > tool: plastic, fibreglass-reinforced



97 49 66 2

| Article No. | EAN | ↔ mm | g |
|-------------|----------------|------|----|
| 97 49 66 2 | 4003773-074106 | 115 | 18 |

Compression Tool

for Coax connectors

97
40

For crimping F, BNC and RCA connectors
Robust design

- > suitable for RG 59 / 6 / 11 cable redatable head for different cable sizes
- > redatable insert for various types of connector
- > adjusting screw for various connector lengths
- > applicable among others for compression connectors Kathrein EMK 12; Cablecon F-56 CX3 5.1; Astro FKS 06



97 40 20 SB

| Size X after compression | plugs | |
|--------------------------|-------|---------------|
| 17 - 24 mm | | F (RG 59/6) |
| 30 - 37 mm | | BNC (RG 59/6) |
| 22 - 29 mm | | RCA (59/6) |
| 35 - 42 mm | | F (RG 11) |

| Article No. | EAN | ↔ mm | Applications | g |
|-------------|--------|------|--------------------------|-----|
| 97 40 20 SB | 077626 | 175 | for F, BNC and RCA-plugs | 430 |

Crimping Pliers for Scotchlok connectors


with side cutter

97
50

- > for crimping plastic-insulated telecommunication or signal cables using the U-contact principle in single Scotchlok connectors
- > no stripping necessary, U-shaped elements establish the connection
- > cutting edges additionally induction hardened
- > with opening spring
- > Vanadium electric steel; forged, oil-hardened



97 50 01

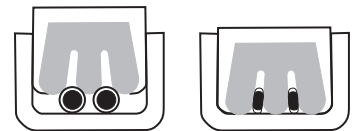

| Article No. | EAN | ↔ mm | | Head | Handles | Applications | Capacity Ø mm | g |
|-------------|--------|------|--|----------|----------------|----------------------------|---------------|-----|
| 97 50 01 | 028239 | 155 | | polished | plastic coated | Scotchlok single connector | 0.4 - 1.1 | 135 |

Crimping Pliers for Western plugs

97
51

- > professional tool for cutting and stripping unshielded ribbon telephone cables
- > for crimping 6- and 8-pole Western plugs type RJ 11/12 (9.65 mm width) and type RJ 45 (11.68 mm width)
- > exact crimping process due to parallel crimping
- > repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > with length cutter and dismantling knife for ribbon cables 6 and 12 mm length
- > with additional stripping device for round cables
- > Chrome vanadium electric steel in special quality, oil-hardened



97 51 10



| Article No. | EAN | ↔ mm | Head | Handles | Capacity | g |
|-------------|--------|------|------|----------------------------|--|-----|
| 97 51 10 | 043171 | 190 | | with multi-component grips | RJ 11/12 (6-poles) 9.65 mm RJ 45 (8-poles) 11.68 mm | 340 |

| | | | |
|----------|--------|-----------------------------------|--|
| 97 59 06 | 029700 | 4 spare blades for poles 97 51 10 | |
|----------|--------|-----------------------------------|--|

Crimping Pliers for Western plugs

97
51

- > professional tool for cutting and stripping unshielded ribbon telephone cables
- > for crimping 6- and 8-pole Western plugs type RJ 11/12 (9.65 mm width) and type RJ 45 (11.68 mm width)
- > exact crimping process due to parallel crimping
- > repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > with length cutter and dismantling knife for ribbon cables 6 and 12 mm length
- > with additional stripping device for round cables
- > Chrome vanadium electric steel in special quality, oil-hardened



97 51 12



| Article No. | EAN 4003773- | ↔ mm | | Handles | Capacity | ⚖ g | |
|-------------|--------------|---------------------------|--|----------------------------|---|-----|--|
| 97 51 12 | 043188 | 200 | | with multi-component grips | RJ 10 (4-poles) 7.65 mm RJ 11/12 (6-poles) 9.65 mm RJ 45 (8-poles) 11.68 mm | 522 | |
| 97 59 12 | 069997 | Spare blades for 97 51 12 | | | | | |

Crimping Pliers short design

97
52



- > repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > good handling due to 20° angled head, low weight and short design
- > Chrome vanadium electric steel in special quality, oil-hardened



97 52 14



97 52 14
available as accessory: locator for non-insulated open plug-type connectors

| Article No. | EAN 4003773- | ↔ mm | | Handles | Applications | Capacity mm ² | AWG | ⚖ g |
|-------------|--------------|----------------------|--|----------------------------|---|--------------------------|---------|-----|
| 97 52 14 | 026808 | 195 | | with multi-component grips | non-insulated open plug type connectors (plug width 2.8 + 4.8 mm) | 0.10 - 1.5 | 27 - 16 | 387 |
| 97 52 20 | 026853 | 195 | | with multi-component grips | COAX-, BNC- and TNC connectors RG 58 / 59 / 62 / 71 / 223 | | | 380 |
| 97 59 14 | 026976 | Locator for 97 52 14 | | | | | | |

Crimping Pliers

also for two-hand operation

97
52

- > for solder-free electrical connections
- > the ingenious lever transmission reduces the handforce up to 30% compared with regular crimping pliers
- > repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > two-hand operation for easy crimping of large conductor diameters
- > easy handling as a result of well balanced centre of gravity, angled head and ergonomically shaped handles
- > Chrome vanadium electric steel in special quality, oil-hardened



97 52 04

Product video




97 52 06



97 52 10



First step: move the handle with two fingers only until both jaws touch the connector to be crimped



Second step: now use the whole hand for further crimping procedure



Third step: when greater hand force is required, such as e.g. when crimping insulated connectors 6 mm², two-hand operation is possible by the longer handles

| Article No. | EAN 4003773- | ↔ mm | | | Applications | Capacity mm ² | AWG | |
|-------------|--------------|------|--|--|---|---|-----------|-----|
| | | | | | | | | g |
| 97 52 04 | 025450 | 250 | | | non-insulated open plug type connectors (plug width 2.8 + 4.8 mm) | 2.8 mm: 0.1 - 0.25 2.8 mm: 0.5 - 1 4.8 mm: 0.5 - 1 4.8 mm: 1.5 - 2.5 | 27 - 13 | 562 |
| 97 52 05 | 025467 | 250 | | | non-insulated open plug type connectors (plug width 2.8 + 4.8 mm) | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | 572 |
| 97 52 06 | 025474 | 250 | | | insulated terminals, plug connectors and butt connectors | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | 565 |
| 97 52 08 | 025481 | 250 | | | insulated and non-insulated end sleeves (ferrules) | 0.25 - 0.75 1 - 1.5 2.5 4 6 | 23 - 10 | 565 |
| 97 52 09 | 025498 | 250 | | | insulated and non-insulated end sleeves (ferrules) | 10 / 16 / 25 | 7 / 5 / 3 | 571 |
| 97 52 10 | 023678 | 250 | | | Coax-, BNC- and TNC-connectors | | | 577 |
| 97 52 13 | 048084 | 250 | | | non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267 | 0.5 - 1 1.5 - 2.5 4 - 6 10 | 20 - 7 | 558 |
| 97 52 19 | 052142 | 250 | | | insulated and non-insulated end sleeves (ferrules) | 35 / 50 | 2 / 0 | 567 |
| 97 52 23 | 052159 | 250 | | | non-insulated terminals + cable connectors | 16 / 25 | 5 / 3 | 565 |

97 49 94 030997 Locator for 97 49 04 / 97 52 04 / 97 52 34


97 49 95 031000 Locator for 97 49 05 / 97 52 05 / 97 52 35

KNIPEX PreciForce®
Crimping Pliers

97
52

PreciForce®

- > repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > good handling thanks to favourable handle position, low weight, compact design and ergonomically shaped handles
- > Chrome vanadium electric steel in special quality, oil-hardened

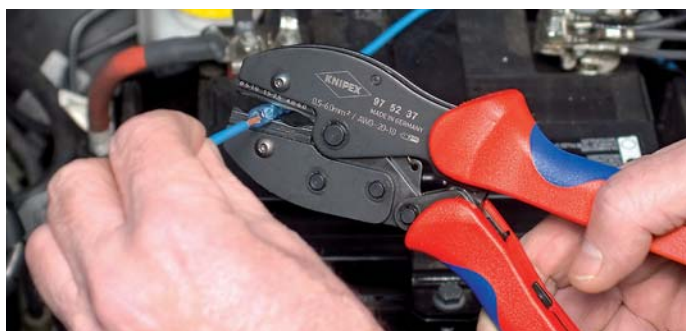

97 52 37

Product video
97 52 36

Product video
97 52 38



For daily crimping applications, the specialist likes crimping pliers that work precisely and reliably. In addition, they should be light, comfortable to use, robust and reasonably priced: PreciForce®.



97 52 30



97 52 33



97 52 34



97 52 36



97 52 38



| Article No. | EAN 4003773- | ↔ mm | | | Applications | Capacity mm ² | AWG | ⚖ g |
|-------------|--------------|------|--|--|---|---|-------------------|-----|
| 97 52 30 | 051855 | 220 | | | compression joints according to DIN 46267 | 1.5 - 4 (6 - 10) | 15 - 11 10 / 7 | 477 |
| 97 52 33 | 051862 | 220 | | | non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267 | 0.5 - 1 1.5 - 2.5 4 - 6 10 | 20 - 7 | 478 |
| 97 52 34 | 051879 | 220 | | | non-insulated open plug type connectors (plug width 2.8 + 4.8 mm) | 2.8 mm: 0.1 - 0.25 2.8 mm: 0.5 - 1 4.8 mm: 0.5 - 1 4.8 mm: 1.5 - 2.5 | 27 - 13 | 483 |
| 97 52 35 | 051886 | 220 | | | non-insulated open plug type connectors (plug width 4.8 + 6.3 mm) | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | 494 |
| 97 52 36 | 051893 | 220 | | | insulated terminals + cable connectors | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | 487 |
| 97 52 37 | 063193 | 220 | | | heat shrinkable sleeve connectors | 0.5 - 1 1.5 - 2.5 4 - 6 | 20 - 10 | 478 |
| 97 52 38 | 051909 | 220 | | | insulated and non-insulated end sleeves (ferrules) | 0.25 - 0.75 1 - 1.5 2.5 4 6 | 23 - 10 | 493 |
| 97 52 50 | 051916 | 220 | | | COAX-, BNC- and TNC-connectors for RG 58; 174; 188; 316 | | | 498 |

97 49 94 030997 Locator for 97 49 04 / 97 52 04 / 97 52 34

97 49 95 031000 Locator for 97 49 05 / 97 52 05 / 97 52 35

Four-Mandrel Crimping Pliers for turned contacts

97
52

- > for crimping turned contacts
- > four-mandrel crimping for top-quality crimping connections
- > mandrel gauge to check the basic setting
- > repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > optimum transmission of force due to highly effective lever action for fatigue-reduced operation
- > high operation comfort thanks to handy shape
- > Chrome vanadium electric steel in special quality, oil-hardened

97 52 63

fine adjustment of pressure depending on the conductor's diameter by means of adjusting wheel; pliers in a plastic case with foam insert and standard locator for precise positioning of the contacts

97 52 63 DG

crimping capacity can be adjusted in increments of 0.01 mm; with digital display of the preset crimping capacities and possibility of re-calibration via RESET function with electronic wear monitoring; adjustment in mm, inches or comparable selection positions according to MIL; pliers in a plastic case with foam insert and standard locator for precise positioning of the contacts

97 52 64

pressure adjustment depending on the conductor's diameter by means of adjusting wheel in 4 different positions; locator for positioning the contacts

97 52 65

fine adjustment of pressure depending on the conductor's diameter by means of adjusting wheel; locator for positioning the contacts; with table for calculating the settings; pliers in a plastic case with foam insert

97 52 65 A

fine adjustment of pressure depending on the conductor's diameter by means of adjusting wheel; with table for calculating the settings; pliers in a plastic case with foam insert

97 52 65 DG

crimping capacity can be adjusted in increments of 0.01 mm; with digital display of the preset crimping capacities and possibility of re-calibration via RESET function with electronic wear monitoring; adjustment in mm, inches or comparable selection positions according to MIL; with table for calculating the settings; pliers in a plastic case with foam insert and standard locator for precise positioning of the contacts

97 52 65 DG A

crimping capacity can be adjusted in increments of 0.01 mm; with digital display of the preset crimping capacities and possibility of re-calibration via RESET function with electronic wear monitoring; adjustment in mm, inches or comparable selection positions according to MIL; with table for calculating the settings; pliers in a plastic case with foam insert; without locator

97 59 65 2

universal locator for holding turned contacts for crimping; precisely adjustable to the length (20 - 45 mm) and diameter (1 - 8 mm) of the crimping connector; locator that is universally adjustable (in length and diameter) for the repeatable exact alignment of turned contacts in crimping pliers; can be set to all commercially available turned contacts in the four-mandrel crimping pliers' capacity range



97 52 63 DG



97 52 64



97 52 65



97 52 65 DG



97 59 65 2

Universal Locator

Turned contacts are used for particularly demanding plug-type connections, e.g. in medical industry and aeronautics. Extremely reliable crimping connections can be achieved only with pliers that work with absolute precision and maintain the required crimping depth in the 1/100 mm range.



Standard locator



Multifunctional digital indication, adjustment in mm, inches or comparable selection positions according to MIL

| Article No. | EAN 4003773- | ↔ mm | | | Pliers | Handles | Applications | Capacity mm ² | AWG | ⚖ g |
|---------------|--------------|---|--|--|---------------|----------------------------|---|--------------------------|---------|-----|
| 97 52 63 | 050148 | 180 | | | chrome plated | with multi-component grips | turned contacts | 0.08 - 2.5 | 28 - 13 | 388 |
| 97 52 63 DG | 063209 | 195 | | | chrome plated | with multi-component grips | turned contacts | 0.08 - 2.5 | 28 - 13 | 388 |
| 97 52 64 | 044093 | 180 | | | chrome plated | with multi-component grips | turned contacts | 0.08 - 2.5 | 28 - 13 | 424 |
| 97 52 65 | 045236 | 230 | | | chrome plated | with multi-component grips | turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller) | 0.14 - 6 | 25 - 10 | 676 |
| 97 52 65 A | 071594 | 250 | | | chrome plated | with multi-component grips | turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller) | 0.14 - 6 | 25 - 10 | 604 |
| 97 52 65 DG | 063216 | 250 | | | chrome plated | with multi-component grips | turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller) | 0.14 - 6 | 25 - 10 | 633 |
| 97 52 65 DG A | 071990 | 250 | | | chrome plated | with multi-component grips | turned contacts (Harting; Ilme; Phoenix; Amphenol; Walther; HTS; Contact; Weidmüller) | 0.14 - 6 | 25 - 10 | 633 |
| 97 59 65 2 | 071600 | Universal Locator for 97 52 65 / 97 52 65 A / 97 52 65 DG / 97 52 65 DG A | | | | | | | | |

Self-Adjusting Crimping Pliers for end sleeves (ferrules)

with lateral access

97
53

Square compression now additionally also for end sleeves (ferrules) up to 16 mm²

Narrow handle width



Crimping capacity can be switched over from 10 mm² to 16 mm²



97 53 04




Particularly suitable for all twin-ferrules up to 2 x 6 mm² or 2 x AWG 8

0.08 - 10 mm² + 16 mm²



Square compression for optimum contact areas in the clamp connection



Square compression

Compact crimping pliers for end sleeves (ferrules) with two great advantages for the user:

- > Automatic self-adjustment to the end sleeve (ferrule) used: this allows the specialist to work with less strain and enables secure, reliable and quick crimping

Product video



Proven functions

- > for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4
- > self-adjusting adaptation to the desired end sleeve (ferrule) size: no wrong crimps caused by using the wrong die
- > repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > tools have been set precisely (calibrated) in the factory
- > optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > handy shape and low weight provide high operation comfort

Capacity up to 10 mm²

Narrow handle width

Product video



97 53 14




Particularly suitable for all twin-ferrules up to 2 x 4 mm² or 2 x AWG 10

0.08 - 10 mm²



Hexagonal compression for optimum positioning in confined areas



Hexagonal compression

| Article No. | EAN | ↔ mm | | | Pliers | Handles | Applications | Capacity mm ² | AWG | ⚖ g |
|-------------|--------|------|--|--|-----------|----------------------------|------------------------|--------------------------|------------|-----|
| 97 53 04 | 028017 | 180 | | | burnished | with multi-component grips | End Sleeves (ferrules) | 0.08 - 10 / 16 | 28 - 7 / 5 | 405 |
| 97 53 14 | 041474 | 180 | | | burnished | with multi-component grips | End Sleeves (ferrules) | 0.08 - 10 | 28 - 7 | 404 |

Self-Adjusting Crimping Pliers for end sleeves (ferrules)

with front loading

97
53

- > for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4
- > self-adjusting adaptation to the desired end sleeve (ferrule) size: no wrong crimps caused by using the wrong die
- > front loading of the end sleeves (ferrules) into the tool
- > repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > high operation comfort thanks to handy shape and low weight
- > Chrome vanadium electric steel in special quality, oil-hardened

97 53 08

compression from 0.08 - 10 mm² in one profile; end sleeves (ferrules) up to 2.5 mm² can also be loaded parallelly from the side;

suitable in particular for all twin end sleeves (ferrules) up to 2 x 4 mm² or 2 x AWG 10

97 53 09

compression from 0.08 - 10 mm² and 16 mm² in one profile; with selector lever for setting the crimping area either to 0.08 - 10 mm² or 16 mm²;

suitable in particular for all twin end sleeves (ferrules) up to 2 x 6 mm² or 2 x AWG 8



97 53 08




97 53 09



Square crimping


Product video

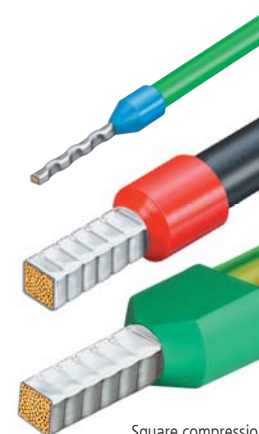

Square compression



Front loading of end sleeves (ferrules) e.g. in switchboards



97 53 08: lateral loading of end sleeves (ferrules) up to 2.5 mm² parallelly from the side e.g. in confined areas

The crimping pliers for end sleeves (ferrules) with three great advantages for the user:

- > Automatic self-adjustment to the end sleeve (ferrule) used: this allows the specialist to work with less strain and enables secure, reliable and quick crimping
- > Range of applications also for large cross-sections: square crimping 0.08 to 10 + 16 mm²
- > Front loading: very helpful under difficult working conditions in confined areas

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Applications | Capacity mm ² | AWG | g |
|-------------|--------------|------|--|-----------|----------------------------|------------------------|--------------------------|------------|-----|
| 97 53 08 | 040187 | 190 | | burnished | with multi-component grips | End Sleeves (ferrules) | 0.08 - 10 | 28 - 7 | 477 |
| 97 53 09 | 044550 | 190 | | burnished | with multi-component grips | End Sleeves (ferrules) | 0.08 - 10 / 16 | 28 - 7 / 5 | 486 |

Crimping Pliers for micro plugs
parallel crimping

97
54

- > parallel crimping performance to satisfy the particularly high standards of small connectors
- > repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > fixed locator for D-Sub micro plugs for an exact positioning of connector and cable
- > crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > crimping pliers for other mini plugs such as HD 22, Modu IV, Micro Timer, MQS ... on request
- > Chrome vanadium electric steel in special quality, oil-hardened



97 54 24



97 54 25



97 54 26



97 54 27



| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Applications | Capacity mm² | AWG | ⚖ g |
|-------------|--------------|------|--|-----------|----------------------------|--------------------------|-------------------|--------------------|-----|
| 97 54 24 | 060215 | 190 | | burnished | with multi-component grips | D-Sub-; HD 20-; HDE plug | 0.03 - 0.56 | 32 - 20 | 305 |
| 97 54 25 | 079859 | 190 | | burnished | with multi-component grips | Micro-Fit™ | | 20 / 22-24 / 26-30 | |
| 97 54 26 | 079866 | 190 | | burnished | with multi-component grips | Mini-Fit® | | 16 / 18 / 20-24 | |
| 97 54 27 | 079873 | 190 | | burnished | with multi-component grips | MQS plug | 0.25 / 0.35 / 0.5 | | |

Crimping Pliers for end sleeves (ferrules)

97
6

- > for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4 in the range from 0.25 up to 2.5 mm²
- > crimping in marked trapezoidal dies for reliable connections between the sleeve and the conductor
- > Vanadium electric steel; forged, oil-hardened



97 62 145 A



| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Capacity mm² | AWG | ⚖ g |
|-------------|--------------|------|--|----------|--|--------------|---------|-----|
| 97 61 145 A | 035558 | 145 | | polished | plastic coated | 0.25 - 2.5 | 23 - 13 | 140 |
| 97 61 145 F | 043980 | 145 | | polished | plastic coated | 0.25 - 2.5 | 23 - 13 | 140 |
| 97 62 145 A | 060154 | 145 | | polished | with multi-component grips | 0.25 - 2.5 | 23 - 13 | 170 |
| 97 68 145 A | 071754 | 145 | | polished | insulated with multi-component grips, VDE-tested | 0.25 - 2.5 | 23 - 13 | 175 |

Crimping Pliers for end sleeves (ferrules)




97
7

Also as VDE version

Easy crimping due to optimised transmission ratio

Light and slim design

- > for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4 from 0.25 to 16 mm²
- > crimping in marked half-round dies for reliable connections between the sleeve and the conductor
- > 9 particularly deep dies with conical side faces
- > High-grade special tool steel, forged, oil-hardened



97 71 180



97 72 180



97 78 180




| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Applications | Capacity mm ² | AWG | ⚖ g |
|-------------|--------------|------|--|----------|--|------------------------|--------------------------|--------|-----|
| 97 71 180 | 040668 | 180 | | polished | plastic coated | End Sleeves (ferrules) | 0.25 - 16 | 23 - 5 | 205 |
| 97 72 180 | 060185 | 180 | | polished | with multi-component grips | End Sleeves (ferrules) | 0.25 - 16 | 23 - 5 | 242 |
| 97 78 180 | 072003 | 180 | | polished | insulated with multi-component grips, VDE-tested | End Sleeves (ferrules) | 0.25 - 16 | 23 - 5 | 254 |

Crimping Pliers for end sleeves (ferrules)

with front loading

97
8

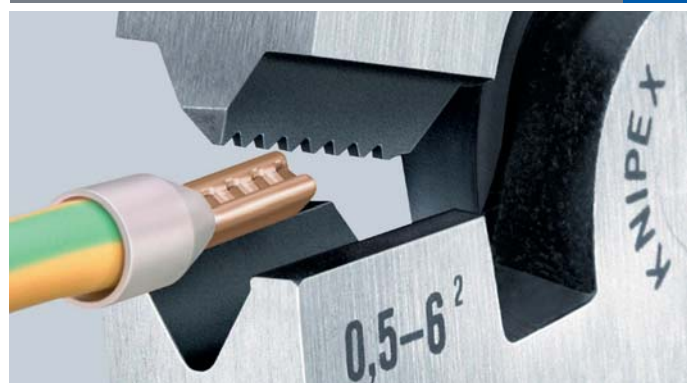

- > for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4 in the range 0.5 to 6 mm²
- > ideal for work in confined areas, e.g. in narrow and deep switch boxes
- > Special tool steel, forged, oil-hardened



97 81 180



| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Applications | Capacity mm ² | AWG | ⚖ g |
|-------------|--------------|------|--|----------|----------------|------------------------|--------------------------|---------|-----|
| 97 81 180 | 019794 | 180 | | polished | plastic coated | End Sleeves (ferrules) | 0.5 - 6 | 20 - 10 | 227 |

Crimp Assortments
for end sleeves (ferrules)

97
90



- > in a TANOS MINI-systainer® (solid plastic box)
- > T-Loc fastener for one-handed operation: open or close the systainer® with one turn and connect to a second systainer®
- > opening when connected: fast and simple access to content without disconnection
- > two stackable plastic inserts with 6 trays each for connectors
- > with an assortment of end sleeves (ferrules) with / without collar

97 90 05
with Crimping Pliers for end sleeves 97 71 180

97 90 06
with Crimping Pliers for end sleeves 97 71 180

97 90 09
with Self-Adjusting Crimping Pliers for End Sleeves (ferrules) 97 53 04

97 90 10
with Self-Adjusting Insulation Stripper 12 40 200; with Self-Adjusting Crimping Pliers for End Sleeves (ferrules) 97 53 04

97 90 12
with Self-Adjusting Insulation Stripper 12 40 200; with Self-Adjusting Crimping Pliers for End Sleeves (ferrules) 97 53 08

97 90 23
with Crimping Pliers "PeciForce" for End Sleeves (ferrules) 97 52 38

97 90 24
with Self-Adapting Universal Insulation Stripper "MultiStrip 10" 12 42 195; with Self-Adjusting Crimping Pliers for End Sleeves (ferrules) 97 53 08



97 90 05



97 90 06



97 90 09



97 90 10



97 90 12



97 90 23



97 90 24



Several boxes can be connected with each other





| Article No. | EAN 4003773- | Pliers | | 200 x mm ² | 150 x mm ² | 100 x mm ² | 75 x mm ² | 50 x mm ² | 40 x mm ² | g |
|-------------|--------------|-----------------------------|--|----------------------------|-----------------------|-----------------------|----------------------|----------------------|----------------------|------|
| 97 90 05 | 025535 | 97 71 180 | | 0.5 / 0.75 / 1 / 1.5 / 2.5 | 4 / 6 | | | 10 / 16 | | 930 |
| 97 90 06 | 025542 | 97 71 180 | | 0.5 / 0.75 / 1 / 1.5 | 2,5 | | 4 / 6 | 10 | 16 | 1000 |
| 97 90 09 | 028574 | 97 53 04 | | 0.5 / 0.75 / 1 / 1.5 / 2.5 | | 4 / 6 | | 10 | | 1420 |
| 97 90 10 | 046202 | 97 53 04 / 12 40 200 | | 0.5 / 0.75 / 1 / 1.5 / 2.5 | | 4 / 6 | | 10 | | 1353 |
| 97 90 12 | 048916 | 97 53 08 / 12 40 200 | | 0.5 / 0.75 / 1 / 1.5 / 2.5 | | 4 / 6 | | 10 | | 1427 |
| 97 90 23 | 062158 | 97 52 38 | | 0.5 / 0.75 / 1 / 1.5 / 2.5 | | 4 / 6 | | | | 1226 |
| 97 90 24 | 062394 | 97 53 08 / 12 42 195 | | 0.5 / 0.75 / 1 / 1.5 / 2.5 | | 4 / 6 | | 10 | | 1348 |
| 97 90 00 LE | 054009 | TANOS MINI-systainer® empty | | | | | | | | 900 |

Crimp Assortments
for cable connectors

97
90



- 97 90 00**
with Crimp Grip Pliers 97 00 215 A
- 97 90 01**
with Crimping Pliers 97 32 225
- 97 90 21**
with Crimping Pliers PreciForce® 97 52 36 (for insulated terminals and plug connectors)
- 97 90 22**
with Self-Adapting Universal Insulation Stripper "MultiStrip 10" 12 42 195;
with Crimping Pliers PreciForce® 97 52 36 (for insulated terminals and plug connectors)


| Article No. | EAN 4003773- | Pliers | Cable Connectors | | g | |
|------------------------------------|-----------------|--|--|--------------------------|-----------|------|
| | | | Quantity | Cable mm ² | | |
| 97 90 00 | 025375 |  97 00 215 A | Blade Terminal Sockets, 6.3 x 0.8 mm | 25 | 4 - 6 | 1391 |
| | | | | 25 | 1.5 - 2.5 | |
| | | | | 25 | 0.5 - 1 | |
| | | | Round Sockets, Ø 4 mm | 25 | 0.5 - 1 | |
| | | | Cable Connectors, eye type, Ø 4 mm | 25 | 0.5 - 1 | |
| | | | | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type, Ø 5 mm | 25 | 1.5 - 2.5 | |
| | | | | 25 | 4 - 6 | |
| | | | Cable Connectors, eye type, Ø 6 mm | 25 | 4 - 6 | |
| | | | Butt Connectors, insulated, red | 25 | 0.5 - 1 | |
| Butt Connectors, insulated, blue | 25 | 1.5 - 2.5 | | | | |
| Round Pin Plugs, Ø 4 mm | 25 | 0.5 - 1 | | | | |
| 97 90 21 | 062134 |  97 52 36 | Blade Terminal Sockets, 6.3 x 0.8 mm | 25 | 0.5 - 1 | 1416 |
| | | | | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type, Ø 4 mm | 25 | 0.5 - 1 | |
| | | | Cable Connectors, eye type, Ø 5 mm | 25 | 0.5 - 1 | |
| | | | Cable Connectors, eye type, Ø 6 mm | 25 | 4 - 6 | |
| | | | Cable Connectors, eye type, Ø 8 mm | 25 | 4 - 6 | |
| | | | Cable Connectors, eye type, Ø 4 mm | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type, Ø 5 mm | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type, Ø 6 mm | 25 | 1.5 - 2.5 | |
| | | | Butt Connectors, insulated, red | 25 | 0.5 - 1 | |
| Butt Connectors, insulated, blue | 25 | 4 - 6 | | | | |
| Butt Connectors, insulated, yellow | 25 | 1.5 - 2.5 | | | | |
| 97 90 22 | 062141 |  97 52 36 12 42 195 | Blade Terminal Sockets, 6.3 x 0.8 mm | 25 | 0.5 - 1 | 1527 |
| | | | | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type, Ø 4 mm | 25 | 0.5 - 1 | |
| | | | Cable Connectors, eye type, Ø 5 mm | 25 | 0.5 - 1 | |
| | | | Cable Connectors, eye type, Ø 4 mm | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type, Ø 5 mm | 25 | 1.5 - 2.5 | |
| | | | | 25 | 1.5 - 2.5 | |
| | | | | 25 | 4 - 6 | |
| | | | Cable Connectors, eye type, Ø 8 mm | 25 | 4 - 6 | |
| | | | Butt Connectors, insulated, red | 25 | 0.5 - 1 | |
| Butt Connectors, insulated, blue | 25 | 1.5 - 2.5 | | | | |
| Butt Connectors, insulated, yellow | 25 | 4 - 6 | | | | |
| 97 90 25 | 076971 |  97 22 240 | Non-insulated Blade Terminal Sockets 6.3 x 0.8 mm | 25 | 0.5 - 1.5 | 1150 |
| | | | | 25 | 1 - 2.5 | |
| | | | Blade Terminal Sockets 6.3 x 0.8 mm | 25 | 0.5 - 1 | |
| | | | | 25 | 1.5 - 2.5 | |
| | | | | 25 | 4 - 6 | |
| | | | Blade Terminal Plugs 6.3 x 0.8 mm | 25 | 0.5 - 1 | |
| | | | | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type Ø 4 mm | 25 | 0.5 - 1 | |
| | | | | 25 | 1.5 - 2.5 | |
| | | | Butt Connectors, insulated, red | 25 | 0.5 - 1 | |
| Butt Connectors, insulated, blue | 25 | 1.5 - 2.5 | | | | |
| Butt Connectors, insulated, yellow | 25 | 4 - 6 | | | | |

Crimp Assortments
for cable connectors

97
90

97 90 25
with Crimping Pliers 97 22 240
97 90 26
with Crimping Pliers 97 32 240




| Article No. | EAN 4003773- | Pliers | Cable Connectors | | | g |
|-------------------------|-----------------|--|--------------------------------------|--------------------------|-----------|------|
| | | | Quantity | Cable mm ² | | |
| 97 90 26 | 079521 |  97 32 240 | Blade Terminal Sockets, 6.3 x 0.8 mm | 25 | 1.5 - 2.5 | 1420 |
| | | | Blade Terminal Sockets, 6.3 x 0.8 mm | 25 | 4 - 6 | |
| | | | Blade Terminal Sockets, 6.3 x 0.8 mm | 25 | 0.5 - 1 | |
| | | | Cable Connectors, eye type, Ø 4 mm | 25 | 0.5 - 1 | |
| | | | Cable Connectors, eye type, Ø 4 mm | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type, Ø 5 mm | 25 | 1.5 - 2.5 | |
| | | | Cable Connectors, eye type, Ø 5 mm | 25 | 4 - 6 | |
| | | | Cable Connectors, eye type, Ø 6 mm | 25 | 4 - 6 | |
| | | | Butt Connectors, insulated, Red | 25 | 0.5 - 1 | |
| | | | Butt Connectors, insulated, Blue | 25 | 1.5 - 2.5 | |
| | | | Round Sockets, Ø 4 mm | 25 | 0.5 - 1 | |
| Round Pin Plugs, Ø 4 mm | 25 | 0.5 - 1 | | | | |
| 97 90 00 LE | 054009 | TANOS MINI-systainer® empty | | | | 900 |




Cable Connectors
DIN 46247


97
99

| Article No. | EAN 4003773- | | Width x Thickness mm ² | Cable mm ² | AWG | Colour |  |
|-------------|--------------|-----------------------------------|-----------------------------------|-----------------------|---------|--------|---|
| 97 99 001 | 075882 | Blade Terminal Sockets, insulated | 2.8 x 0.5 | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 010 | 075899 | | 4.8 x 0.8 | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 011 | 075905 | | 4.8 x 0.8 | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 020 | 075912 | | 6.3 x 0.8 | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 021 | 075929 | | 6.3 x 0.8 | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 022 | 075936 | | 6.3 x 0.8 | 4 - 6 | 11 - 10 | yellow | 100 |
| 97 99 030 | 075943 | | 7.7 x 0.8 | 1.5 - 2.5 | 15 - 13 | blue | 100 |




| Article No. | EAN 4003773- | | Width x Thickness mm ² | Cable mm ² | AWG |  |
|-------------|--------------|--------------------------------|-----------------------------------|-----------------------|-------|---|
| 97 99 050 | 075950 | Plug Connectors, non-insulated | 2.8 x 0.8 | 0.5 - 1 | 20-17 | 100 |
| 97 99 060 | 075967 | | 4.8 x 0.8 | 1.5 - 2.5 | 16-14 | 100 |
| 97 99 070 | 075974 | | 6.3 x 0.8 | 0.5 - 1.5 | 20-15 | 100 |
| 97 99 071 | 075981 | | 6.3 x 0.8 | 1 - 2.5 | 17-14 | 100 |




| Article No. | EAN 4003773- | | Width x Thickness mm ² | Cable mm ² | AWG | Colour |  |
|-------------|--------------|--|-----------------------------------|-----------------------|---------|--------|---|
| 97 99 090 | 075998 | Flat Pin Accessory Distributors, insulated | 6.3 x 0.8 | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 091 | 076001 | | 6.3 x 0.8 | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 092 | 076018 | | 6.3 x 0.8 | 4 - 6 | 11 - 10 | yellow | 100 |




| Article No. | EAN 4003773- | | Width x Thickness mm ² | Cable mm ² | AWG | Colour |  |
|-------------|--------------|---------------------------------|-----------------------------------|-----------------------|---------|--------|---|
| 97 99 110 | 076025 | Blade Terminal Plugs, insulated | 6.3 x 0.8 | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 111 | 076032 | | 6.3 x 0.8 | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 112 | 076049 | | 6.3 x 0.8 | 4 - 6 | 11 - 10 | yellow | 100 |



| Article No. | EAN 4003773- | | Plug Ø mm | Cable mm ² | AWG | Colour |  |
|-------------|--------------|--------------------------|-----------|-----------------------|---------|--------|---|
| 97 99 130 | 076056 | Round Sockets, insulated | 4 | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 131 | 076063 | | 5 | 1.5 - 2.5 | 15 - 13 | blue | 100 |



| Article No. | EAN 4003773- | | Plug Ø mm | Cable mm ² | AWG | Colour |  |
|-------------|--------------|----------------------------|-----------|-----------------------|---------|--------|---|
| 97 99 150 | 076070 | Round Pin Plugs, insulated | 4 | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 151 | 076087 | | 5 | 1.5 - 2.5 | 15 - 13 | blue | 100 |




97 52 36




97 53 04




97 22 240

| Article No. | EAN 4003773- | | Screws Ø mm | Cable mm ² | AWG | Colour |  |
|-------------|--------------|---------------------------------------|-------------|-----------------------|---------|--------|---|
| 97 99 170 | 076094 | Cable Connectors, eye type, insulated | 3 | 0.5 - 1 | 20 - 17 | red | 200 |
| 97 99 171 | 076100 | | 4 | 0.5 - 1 | 20 - 17 | red | 200 |
| 97 99 172 | 076117 | | 5 | 0.5 - 1 | 20 - 17 | red | 200 |
| 97 99 173 | 076124 | | 4 | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 174 | 076131 | | 5 | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 175 | 076148 | | 6 | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 176 | 076155 | | 8 | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 177 | 076162 | | 5 | 4 - 6 | 11 - 10 | yellow | 100 |
| 97 99 178 | 076179 | | 6 | 4 - 6 | 11 - 10 | yellow | 100 |
| 97 99 179 | 076186 | | 8 | 4 - 6 | 11 - 10 | yellow | 100 |
| 97 99 180 | 076193 | | 10 | 4 - 6 | 11 - 10 | yellow | 100 |





| Article No. | EAN 4003773- | | Screws Ø mm | Cable mm ² | AWG |  |
|-------------|--------------|------------------------------------|-------------|-----------------------|---------|---|
| 97 99 210 | 076209 | Non-insulated Solderless Terminals | 3 | 0.5 - 1 | 20 - 17 | 200 |
| 97 99 211 | 076216 | | 4 | 0.5 - 1 | 20 - 17 | 200 |
| 97 99 212 | 076223 | | 5 | 0.5 - 1 | 20 - 17 | 200 |
| 97 99 213 | 076230 | | 4 | 1.5 - 2.5 | 15 - 13 | 100 |
| 97 99 214 | 076247 | | 5 | 1.5 - 2.5 | 15 - 13 | 100 |
| 97 99 215 | 076254 | | 6 | 1.5 - 2.5 | 15 - 13 | 100 |
| 97 99 216 | 076261 | | 8 | 1.5 - 2.5 | 15 - 13 | 100 |
| 97 99 217 | 076278 | | 5 | 4 - 6 | 11 - 10 | 100 |
| 97 99 218 | 076285 | | 6 | 4 - 6 | 11 - 10 | 100 |
| 97 99 219 | 076292 | | 8 | 4 - 6 | 11 - 10 | 100 |
| 97 99 220 | 076308 | | 10 | 4 - 6 | 11 - 10 | 100 |




| Article No. | EAN 4003773- | | Cable mm ² | AWG | Colour |  |
|-------------|--------------|---------------------------------|-----------------------|---------|--------|---|
| 97 99 250 | 076315 | Heat Shrinkable Butt Connectors | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 251 | 076322 | | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 252 | 076339 | | 4 - 6 | 11 - 10 | yellow | 100 |



| Article No. | EAN 4003773- | | Cable mm ² | AWG | Colour |  |
|-------------|--------------|----------------------------|-----------------------|---------|--------|---|
| 97 99 270 | 076346 | Butt Connectors, insulated | 0.5 - 1 | 20 - 17 | red | 100 |
| 97 99 271 | 076353 | | 1.5 - 2.5 | 15 - 13 | blue | 100 |
| 97 99 272 | 076360 | | 4 - 6 | 11 - 10 | yellow | 100 |




| Article No. | EAN 4003773- | | Cable mm ² | AWG | mm |  |
|-------------|--------------|--------------------------------|-----------------------|---------|----|---|
| 97 99 290 | 076377 | Butt Connectors, non-insulated | 0.5 - 1 | 20 - 17 | 15 | 200 |
| 97 99 291 | 076384 | | 1.5 - 2.5 | 15 - 13 | 15 | 200 |
| 97 99 292 | 076391 | | 4 - 6 | 11 - 10 | 15 | 100 |
| 97 99 293 | 076407 | | 10 | 7 | 15 | 100 |



Cable Connectors

DIN 46247

97
99


| Article No. | EAN 4003773- | | ↔ mm | Cable mm ² | AWG | Colour |  |
|-------------|-----------------|---------------------------------------|---------------------------------------|--------------------------|-----|--------|---|
| 97 99 330 | 076414 | End Sleeves (ferrules) with collar | 14 | 0.5 | 20 | white | 200 |
| 97 99 331 | 076421 | | 14 | 0.75 | 18 | grey | 200 |
| 97 99 332 | 076438 | | 14 | 1 | 17 | red | 200 |
| 97 99 333 | 076445 | | 14 | 1.5 | 15 | black | 200 |
| 97 99 334 | 076452 | | 14 | 2.5 | 13 | blue | 200 |
| 97 99 335 | 076469 | | 17 | 4 | 11 | grey | 200 |
| 97 99 336 | 076476 | | 20 | 6 | 10 | yellow | 100 |
| 97 99 337 | 076483 | | 22 | 10 | 7 | red | 100 |
| 97 99 338 | 076490 | | 24 | 16 | 5 | blue | 100 |
| 97 99 339 | 076506 | | 30 | 25 | 3 | yellow | 50 |
| 97 99 350 | 076513 | | End Sleeves (ferrules) with collar | 16 | 0.5 | 20 | white |
| 97 99 351 | 076520 | 16 | | 0.75 | 18 | grey | 200 |
| 97 99 352 | 076537 | 16 | | 1 | 17 | red | 200 |
| 97 99 353 | 076544 | 16 | | 1.5 | 15 | black | 200 |
| 97 99 354 | 076551 | 16 | | 2.5 | 13 | blue | 200 |
| 97 99 355 | 076568 | 20 | | 4 | 11 | grey | 200 |
| 97 99 356 | 076575 | 26 | | 6 | 10 | yellow | 100 |
| 97 99 357 | 076582 | 28 | | 10 | 7 | red | 100 |
| 97 99 358 | 076599 | 28 | | 16 | 5 | blue | 100 |
| 97 99 359 | 076605 | 32 | | 25 | 3 | yellow | 50 |



97 99 336




97 99 353

| Article No. | EAN 4003773- | | ↔ mm | Cable mm ² | AWG | Colour |  |
|-------------|-----------------|---|---------|--------------------------|--------|--------|---|
| 97 99 370 | 076612 | Twin wire-end ferrules, with plastic collar | 15 | 2 x 0.5 | 2 x 20 | white | 200 |
| 97 99 371 | 076629 | | 16 | 2 x 0.75 | 2 x 18 | grey | 200 |
| 97 99 372 | 076636 | | 15 | 2 x 1 | 2 x 17 | red | 200 |
| 97 99 373 | 076643 | | 18 | 2 x 1.5 | 2 x 15 | black | 200 |
| 97 99 374 | 076650 | | 18 | 2 x 2.5 | 2 x 13 | blue | 100 |
| 97 99 375 | 076667 | | 23 | 2 x 4 | 2 x 11 | grey | 100 |
| 97 99 376 | 076674 | | 26 | 2 x 6 | 2 x 10 | yellow | 50 |
| 97 99 377 | 076681 | | 24 | 2 x 10 | 2 x 7 | red | 50 |
| 97 99 378 | 076698 | | 29 | 2 x 16 | 2 x 5 | blue | 25 |



97 99 374

| Article No. | EAN 4003773- | | ↔ mm | Cable mm ² | AWG |  |
|-------------|-----------------|--|---------|--------------------------|-----|---|
| 97 99 390 | 076704 | Non-insulated End Sleeves (ferrules) | 6 | 0.50 | 20 | 200 |
| 97 99 391 | 076711 | | 6 | 0.75 | 18 | 200 |
| 97 99 392 | 076728 | | 6 | 1 | 17 | 200 |
| 97 99 393 | 076735 | | 7 | 1.5 | 15 | 200 |
| 97 99 394 | 076742 | | 7 | 2.5 | 13 | 200 |
| 97 99 395 | 076759 | | 9 | 4 | 11 | 200 |
| 97 99 396 | 076766 | | 12 | 6 | 10 | 100 |
| 97 99 397 | 076773 | | 12 | 10 | 7 | 100 |
| 97 99 398 | 076780 | | 12 | 16 | 5 | 100 |
| 97 99 399 | 076797 | | 12 | 25 | 3 | 50 |



97 99 390



MADE IN GERMANY

DO NOT CUT STEEL

KNIPEX

8 3 3 320

Keine M...

Insulated Tools

| | |
|-------------------------------|-----|
| Pliers | 196 |
| Precision Tweezers | 208 |
| Cable Shears | 208 |
| Cable Cutters | 211 |
| Crimping Pliers | 213 |
| Wrenches | 214 |
| Screwdrivers | 216 |
| Hexagon Sockets | 220 |
| Cable Knives | 222 |
| Insulated Pliers of plastic | 224 |
| Insulating Clamp from plastic | 224 |
| Plastic Slip-On Caps | 225 |
| Self-Clamping Slip-On Caps | 225 |
| Electricians' Gloves | 225 |
| Insulating Mats | 225 |
| PUK® Junior Hacksaw | 226 |
| Tool Kits | 226 |





Testing dielectric strength, subjecting each pair of pliers to a load of 10,000 V AC.

Insulated tools are a matter of trust

Professionals trust their tools. This trust is vital when working on electrical installations. In this case, the electrician holding the pliers is also holding his life in his hands. Our insulated tools therefore not only meet statutory requirements, but also offer the greatest possible safety, reliability and performance.





Testing the adhesion of the insulating coating at 500 N.



Pressure test at 70°C.



Low temperature impact test at -25°C.



Testing the electrical insulating properties.

Regulated by standards

Only trained professionals are allowed to work on live installations. Such work is subject to strict occupational health and safety standards such as the German DIN VDE 0105 and the international EN 50110 and IEC 60364. In each case they must deploy special tools that have been specifically manufactured and tested for this work. Which requirements have to be met by tools used in live work is determined by DIN EN / IEC 60900. KNIPEX tools which bear the special mark **⚡ 1000 V** are approved for work up to 1000 V AC.

Guaranteed individually checked

Every insulated tool undergoes, one by one, a dielectric strength at 10,000 V AC before we sell it. This means that work in the area up to 1,000 V AC has a safety buffer of ten times the permitted maximum limit. Other procedures check the reliability of the insulation towards heat, cold, tensile and impact force. In addition to the KNIPEX quality assurance team, external institutes and test centres such as the VDE guarantee that all VDE criteria have been satisfied. We go through this effort to safeguard the user. He trusts his well-being with our pliers, day in and day out. In return we want to give him the best possible safety at all times. We stand by this responsibility with our name on the insulation of KNIPEX tools.

Strong beneath the insulation

The insulation provides safety when handling electrical installations, but it does not cut, grip or crimp. The mechanical properties of the basic tool, such as cutting performance, precision and stability, therefore style part of the overall quality of insulated tools.

With our insulated pliers, users can depend on the quality and durability of products from KNIPEX production. For assembly tools insulated by us, we use basic tools from tried and tested suppliers whose quality we subject to regular, stringent checks. The expert can rely on this double dependability of tool and insulation.

Always comply with the currently valid regulations and observe the SAFETY INSTRUCTIONS given below:

- > Insulated tools must be transported in a manner that will prevent any damage to the insulation.
- > Check before every use whether the insulation is damaged in any way, defective tools must be discarded.
- > Always keep your insulated tools clean and dry.
- > Wear protective goggles when working with cutting nippers or working overhead.
- > Always wear goggles or a facial mask when working on live equipment.
- > Make sure the workplace is clean and orderly, particularly when you are working on live installations.
- > Wear protective clothing and use SAFETY equipment (e.g. insulating gloves, insulating mats, protective covers) especially in confined working spaces.
- > Use only a tool with suitable dimensions. That will prevent slipping on the workpiece and unintentional contact with non-insulated parts.
- > Make sure that detached parts or cut-off ends of conductors do not fall onto live parts.

Combination Pliers

Chrome plated Vanadium
DIN ISO 5746 IEC 60900 DIN EN 60900

01

- > for heaviest duty
- > with gripping zones for flat and round material, suitable for versatile use
- > with cutting edges for soft, hard and piano wire long cutting edges for thicker cables
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > particularly wear resistant gripping jaws; hardness of the gripping jaws approx. 53 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



01 06 190
1000V

| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Cutting capacities | | | | g |
|-------------|-----------------|---------|---------------|--|--------------------|------|------|-----------------|-----|
| | | | | | Ø mm | Ø mm | Ø mm | mm ² | |
| 01 06 160 | 040729 | 160 | chrome plated | insulated with multi-component grips, VDE-tested | 2.0 | 1.5 | 10.0 | 16 | 201 |
| 01 06 190 | 040415 | 190 | | | 2.5 | 2.0 | 13.0 | 25 | 320 |

High Leverage Combination Pliers

DIN ISO 5746 IEC 60900 DIN EN 60900

02

- > 35% less effort required than with conventional combination pliers easier work due to optimised leverage
- > with cutting edges (hardness approx. 63 HRC) for soft and hard wire and piano wire
- > long cutting edges for thicker cables
- > with gripping zones for flat and round material, suitable for versatile use
- > High-grade special tool steel, forged, multi stage oil-hardened



02 06 180
1000V



02 07 225
1000V

| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Cutting capacities | | | | g |
|-------------|-----------------|---------|---------------|--|--------------------|------|------|-----------------|-----|
| | | | | | Ø mm | Ø mm | Ø mm | mm ² | |
| 02 06 180 | 010012 | 180 | chrome plated | insulated with multi-component grips, VDE-tested | 2.5 | 2.0 | 11.5 | 16 | 247 |
| 02 06 200 | 010029 | 200 | | | 2.8 | 2.2 | 13.0 | 25 | 343 |
| 02 06 225 | 010036 | 225 | | | 3.0 | 2.5 | 14.0 | 25 | 401 |
| 02 07 200 | 022299 | 200 | chrome plated | with dipped insulation, VDE-tested | 2.8 | 2.2 | 13.0 | 25 | 380 |
| 02 07 225 | 022305 | 225 | | | 3.0 | 2.5 | 14.0 | 25 | 486 |

Combination Pliers

DIN ISO 5746 IEC 60900 DIN EN 60900

03

- > with gripping zones for flat and round material, suitable for versatile use
- > with cutting edges for soft and hard wire
- > long cutting edges for thicker cables
- > cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > Special tool steel, forged, multi stage oil-hardened



03 06 180
 ⚠ 1000 V



03 07 200
 ⚠ 1000 V

| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Cutting capacities | | | | ⚖ g | |
|-------------|--------------|------|---------------|--|--------------------|------|------|-------------------|-----|-----|
| | | | | | ⊙ mm | ◐ mm | ⊕ mm | ⊕ mm ² | | |
| 03 06 160 | 021902 | 160 | chrome plated | insulated with multi-component grips, VDE-tested | 3.1 | 2.0 | 10.0 | 16 | 228 | |
| 03 06 180 | 021926 | 180 | | | ⚠ 1000 V | 3.4 | 2.2 | 12.0 | 16 | 264 |
| 03 06 200 | 033776 | 200 | | | 3.8 | 2.5 | 13.0 | 16 | 326 | |
| 03 07 160 | 015307 | 160 | chrome plated | with dipped insulation, VDE-tested | 3.1 | 2.0 | 10.0 | 16 | 254 | |
| 03 07 180 | 015314 | 180 | | | ⚠ 1000 V | 3.4 | 2.2 | 12.0 | 16 | 285 |
| 03 07 200 | 015321 | 200 | | | 3.8 | 2.5 | 13.0 | 16 | 339 | |
| 03 07 250 | 015345 | 250 | | | 3.8 | 2.5 | 15.0 | 25 | 597 | |

Needle-Nose Combination Pliers

DIN ISO 5746

08

Small High Leverage Combination Pliers with pointed jaw. For all common installation and repair work.

Handy use when working in confined areas thanks to slim head design and pointed jaws (anti-twist)


Gripping surfaces with special convex contour on one side for secure gripping of flat parts

Milled groove in the gripping area permits small parts such as nails, pins and bolts to be held and pulled

- > the reliable and diverse combination pliers when out and about
- > easy cutting thanks to the high leverage joint
- > with cutting edges for soft, medium-hard and hard wire
- > long service life and stable tips
- > High-grade special tool steel, forged, multi stage oil-hardened



08 26 145
 ⚠ 1000 V

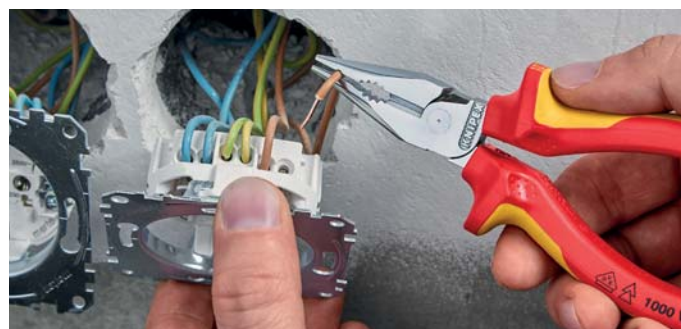

| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Cutting capacities | | | | ⚖ g |
|-------------|--------------|------|---------------|--|--------------------|------|------|-------------------|-----|
| | | | | | ⊙ mm | ◐ mm | ⊕ mm | ⊕ mm ² | |
| 08 26 145 | 079361 | 145 | chrome plated | insulated with multi-component grips, VDE-tested | 3.0 | 2.0 | 8.0 | 16 | 154 |

Insulation Strippers

IEC 60900 DIN EN 60900

11

- > for single, multiple and fine stranded conductors with plastic or rubber insulation max. 5.0 mm dia. or resp. 10 mm² cable cross section
- > easy adjustment to the required diameter of solid or stranded wire with knurled screw and lock nut
- > Special tool steel, forged, oil-hardened



11 06 160
 ⚡ 1000 V





11 07 160
 ⚡ 1000 V

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Stripping capacities Ø mm | Stripping capacities mm ² | AWG | ⚖ g |
|-------------|--------------|------|----------|---------------|--|---------------------------|--------------------------------------|-----|-----|
| 11 06 160 | 021933 | 160 | ⚡ 1000 V | chrome plated | insulated with multi-component grips, VDE-tested | 5.0 | 10 | 7 | 166 |
| 11 07 160 | 015499 | 160 | ⚡ 1000 V | chrome plated | with dipped insulation, VDE-tested | 5.0 | 10 | 7 | 180 |
| 11 17 160 | 015505 | 160 | ⚡ 1000 V | chrome plated | with dipped insulation, VDE-tested | 5.0 | 10 | 7 | 181 |

Dismantling Pliers

DIN ISO 5743

13

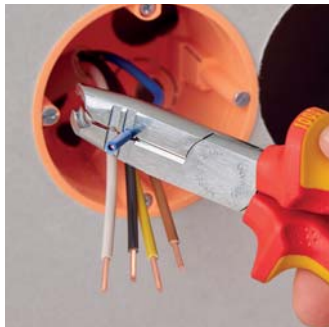

Multifunctional – cutting, dismantling and stripping with one pair of pliers.

For time-saving dismantling and stripping of all common round and damp-proof installation cables (e.g. NYM cable)

Simplified access especially to deep mounted flush sockets thanks to slim head design and optimally angled cable sheath cutter

Strip cables easily and without damage thanks to circular cutting edge with depth limit

- > suitable for universal use: precision wire stripping holes for conductors from 1.5 and 2.5 mm²
- > with diagonal cutters for cutting and trimming conductors, wires, small screws and nails
- > all cutters additionally induction hardened to approx. 61 HRC for high wear resistance
- > 30% lighter than comparable pliers
- > Vanadium steel, forged, multi stage oil-hardened



13 46 165
 ⚡ 1000 V

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Dismantling capacities Ø mm | Stripping capacities Ø mm ² | ⦿ mm | ◐ mm | ⚖ g |
|-------------|--------------|------|----------|---------------|--|-----------------------------|--|------|------|-----|
| 13 46 165 | 079910 | 165 | ⚡ 1000 V | chrome plated | insulated with multi-component grips, VDE-tested | 8 - 13 | 1.5 / 2.5 | 3.2 | 2.2 | 190 |

Diagonal Insulation Stripper

IEC 60900 DIN EN 60900

14


With long cutting edges

High cutting capacity due to high leverage joint

- > precision stripping holes for single conductors of 1.5 and 2.5 mm²
- > convenient cutting of NYM cables up to 5 x 2.5 mm²
- > long tips for ultra fine cutting work also in confined areas
- > induction hardened precision blades, cutting edge hardness approx. 60 HRC
- > Vanadium steel, forged, multi stage oil-hardened



14 26 160
1000V



| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Stripping capacities mm ² | AWG | Cutting capacities | | ⚖ g |
|-------------|-----------------|---------|---------------|--|---|---------|--------------------|------|--------|
| | | | | | | | ⊘ mm | ⊘ mm | |
| 14 26 160 | 040279 | 160 | chrome plated | insulated with multi-component grips, VDE-tested | 1.5 + 2.5 | 15 + 13 | 2.5 | 1.5 | 216 |

Round Nose Pliers


DIN ISO 5745 IEC 60900 DIN EN 60900

22

- > for bending wire loops
- > precision ground, short, round jaws
- > smooth tips
- > Chrome vanadium electric steel, forged, oil-hardened



22 06 160
1000V

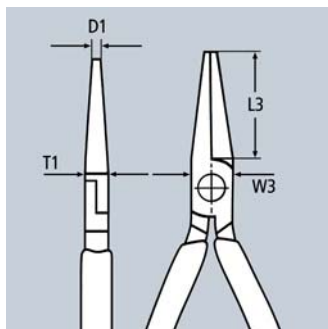

| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Dimensions | | | | ⚖ g |
|-------------|-----------------|---------|---------------|--|------------|----------|----------|----------|--------|
| | | | | | L3 mm | W3 mm | D1 mm | T1 mm | |
| 22 06 160 | 033790 | 160 | chrome plated | insulated with multi-component grips, VDE-tested | 30.0 | 18.0 | 3.0 | 9.5 | 175 |

Pliers for Electrical Installation

IEC 60900 DIN EN 60900

13

The all-rounder for professionals

Multifunctional pliers for the electrical installation; to grip flat and round material, for bending, deburring, cutting cable, stripping and crimping end sleeves (ferrules)

6 functions in one pair of pliers

- > smooth surfaces near the tips grip single cores without damaging them; serrated gripping surfaces and pipe grip for gripping flat and round material
- > clear-cut outside edge on the jaw for working on flush-mounted junction boxes and deburring feed-through holes
- > stripping holes for conductors of 0.75 - 1.5 mm² and 2.5 mm² crimp die for wire-end ferrules 0.5 - 2.5 mm²
- > cable shears with (induction-hardened) precision cutting edges for copper and aluminium cables up to 5 x 2.5 mm² / dia. 15 mm
- > slim dimensions for easy access
- > bolted joint: precise, zero backlash operation of pliers
- > High-grade special tool steel, forged, multi stage oil-hardened



13 86 200



13 96 200



13 96 200

in case of models with opening spring integrated in the joint, the activated locking lever keeps the cutting edges closed while other functions remain active; the intelligent latching mechanism enables you to ,grip' without opening the pliers. The cutting edge remains closed and protected.

Product video




| Article No. | EAN | ↔ mm | Pliers | Handles | Cutting capacities | | Stripping capacity for cross-sections mm ² | Capacity mm ² | ⚖ g |
|-------------|----------------|------|---------------|--|--------------------|-----------------|---|--------------------------|-----|
| | | | | | Ø mm | mm ² | | | |
| 13 86 200 | 4003773-075097 | 200 | chrome plated | insulated with multi-component grips, VDE-tested | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 280 |
| 13 96 200 | 075110 | 200 | chrome plated | insulated with multi-component grips, VDE-tested | 15 | 50 | 0.75 - 1.5 / 2.5 | 0.5 - 2.5 | 280 |

Flat Nose Pliers

DIN ISO 5745 IEC 60900 DIN EN 60900

20

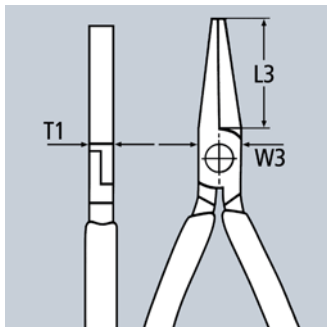

- > short, flat jaws
- > knurled gripping surfaces
- > Chrome vanadium electric steel, forged, oil-hardened



20 06 160



| Article No. | EAN | ↔ mm | Pliers | Handles | Dimensions | | | |
|-------------|--------|------|---------------|--|------------|-------|-------|-----|
| | | | | | L3 mm | W3 mm | T1 mm | ⚖ g |
| 20 06 160 | 033783 | 160 | chrome plated | insulated with multi-component grips, VDE-tested | 30.0 | 17.0 | 9.5 | 176 |

Snipe Nose Side Cutting Pliers

(Radio Pliers)

DIN ISO 5745 IEC 60900 DIN EN 60900

25

- > suitable for finer gripping and cutting work
- > pointed, half-round jaws
- > knurled gripping surfaces
- > with cutting edges for medium hard and hard wire
- > cutting edges additionally induction hardened, cutting edge hardness approx. 61 HRC
- > Vanadium steel, forged, multi stage oil-hardened



25 06 160
 1000 V



25 26 160
 1000 V

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Cutting capacities | | Dimensions | | | | | | |
|-------------|--------------|------|--|---------------|--|--------------------|------|------------|-------|-------|-------|-------|-------|-----|
| | | | | | | ● mm | ● mm | L3 mm | L4 mm | W3 mm | T1 mm | W4 mm | T2 mm | g |
| 25 06 160 | 033806 | 160 | | chrome plated | insulated with multi-component grips, VDE-tested | 2.5 | 1.6 | 50.0 | | 16.5 | 9.0 | 3.0 | 2.5 | 146 |
| 25 26 160 | 052111 | 160 | | chrome plated | insulated with multi-component grips, VDE-tested | 2.5 | 1.6 | 50.0 | 23.0 | 16.5 | 9.0 | 3.0 | 2.5 | 144 |

Snipe Nose Side Cutting Pliers

(Stork Beak Pliers)

DIN ISO 5745 IEC 60900 DIN EN 60900

26


- > high loadable, elastic precision points
- > half-round, long jaws
- > knurled gripping surfaces
- > with cutting edges for medium hard wire max. dia. 3.2 mm and hard wire max. dia. 2.2 mm
- > cutting edges additionally induction hardened, cutting edge hardness approx. 61 HRC
- > Vanadium steel, forged, multi stage oil-hardened



26 16 200
 1000 V



26 27 200
 1000 V

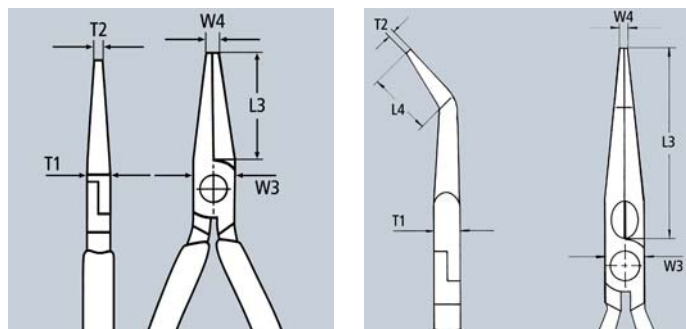


| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Cutting capacities | | Dimensions | | | | | | |
|-------------|--------------|------|--|---------------|--|--------------------|------|------------|-------|-------|-------|-------|-------|-----|
| | | | | | | ● mm | ● mm | L3 mm | L4 mm | T1 mm | W3 mm | W4 mm | T2 mm | g |
| 26 16 200 | 022831 | 200 | | chrome plated | insulated with multi-component grips, VDE-tested | 3.2 | 2.2 | 73.0 | | 9.5 | 17.5 | 3.0 | 2.5 | 206 |
| 26 17 200 | 016069 | 200 | | chrome plated | with dipped insulation, VDE-tested | 3.2 | 2.2 | 73.0 | | 9.5 | 17.5 | 3.0 | 2.5 | 212 |
| 26 26 200 | 022855 | 200 | | chrome plated | insulated with multi-component grips, VDE-tested | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 17.5 | 3.0 | 2.5 | 204 |
| 26 27 200 | 016090 | 200 | | chrome plated | with dipped insulation, VDE-tested | 3.2 | 2.2 | 73.0 | 23.0 | 9.5 | 17.5 | 3.0 | 2.5 | 220 |

Long Nose Pliers

DIN ISO 5745 IEC 60900 DIN EN 60900

30

- > heavy duty and wear resisting
- > different jaw styles
- > Chrome vanadium electric steel, forged, oil-hardened

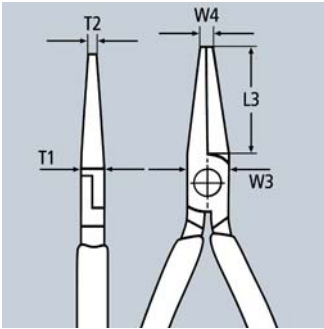

Style 1
long, trapezoidal jaws; knurled gripping surfaces

Style 3
long, round jaws; smooth gripping surfaces



30 16 160

| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Handles | Dimensions | | | | | g |
|-------------|--------------|------|--|-------|---------------|--|------------|-------|-------|-------|-------|-----|
| | | | | | | | L3 mm | W3 mm | T1 mm | W4 mm | T2 mm | |
| 30 16 160 | 001904 | 160 | | 1 | chrome plated | insulated with multi-component grips, VDE-tested | 46.5 | 16.5 | 9.5 | 3.0 | 5.0 | 150 |
| 30 36 160 | 002123 | 160 | | 3 | chrome plated | insulated with multi-component grips, VDE-tested | 41.0 | 16.5 | 9.5 | 5.0 | 2.5 | 141 |

Diagonal Cutters

DIN ISO 5749 IEC 60900 DIN EN 60900

70

- > the indispensable diagonal cutter for all-round use
- > high quality material and precise workmanship for long service life
- > precision cutting edges for soft and hard wire
- > clean cutting of thin copper wires, also at the cutting-edge tips
- > cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC
- > narrow head style for use in confined areas
- > Vanadium steel, forged, multi stage oil-hardened



70 06 180



70 07 180

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Cutting capacities | | | g |
|-------------|--------------|------|--|---------------|--|--------------------|------|------|-----|
| | | | | | | Ø mm | Ø mm | Ø mm | |
| 70 06 125 | 018124 | 125 | | chrome plated | insulated with multi-component grips, VDE-tested | 3.0 | 2.3 | 1.5 | 121 |
| 70 06 140 | 040293 | 140 | | | | 4.0 | 2.5 | 1.8 | 160 |
| 70 06 180 | 033813 | 180 | | | | 4.0 | 3.0 | 2.5 | 254 |
| 70 07 180 | 018179 | 180 | | chrome plated | with dipped insulation, VDE-tested | 4.0 | 3.0 | 2.5 | 269 |



70-160

MADE IN
GERMANY

Diagonal Cutters

DIN ISO 5749 IEC 60900 DIN EN 60900

70

NEW

The next generation of the **KNIPEX classic**, with even better features:

20% higher cutting force than the previous model, plus longer cutting edges

High cutting force due to optimum cutting geometry and transmission ratio

- > strong precision rivet for even movement and long service-life
- > high-precision cutting edges: additionally induction hardened, cutting-edge hardness approx. 62 HRC
- > narrow head with long cutting edges: good access also in confined areas
- > long tool life and high loading capacity
- > the essential diagonal cutters for diverse use
- > Vanadium steel, forged, multi stage oil-hardened



70 06 160
 ⚡ 1000 V  









70 07 160
 ⚡ 1000 V  



70 26 160
 ⚡ 1000 V  



Cuts thin Cu wire accurately, also at the cutting-edge tips


| Article No. | EAN 4003773- | ↔ mm | | Pliers | Handles | Cutting capacities | | | ⚖ g |
|-------------|-----------------|---------|--|---------------|--|--------------------|------|------|--------|
| | | | | | | ⊘ mm | ⊘ mm | ⊘ mm | |
| 70 06 160 | 021995 | 160 | ⚡ 1000 V   | chrome plated | insulated with multi-component grips, VDE-tested | 4.0 | 3.0 | 2.0 | 216 |
| 70 07 160 | 018155 | 160 | ⚡ 1000 V   | chrome plated | with dipped insulation, VDE-tested | 4.0 | 3.0 | 2.0 | 227 |
| 70 26 160 | 018223 | 160 | ⚡ 1000 V   | chrome plated | insulated with multi-component grips, VDE-tested | 4.0 | | | 216 |

KNIPEX X-Cut®

Compact Diagonal Cutters

DIN ISO 5749 IEC 60900 DIN EN 60900

73

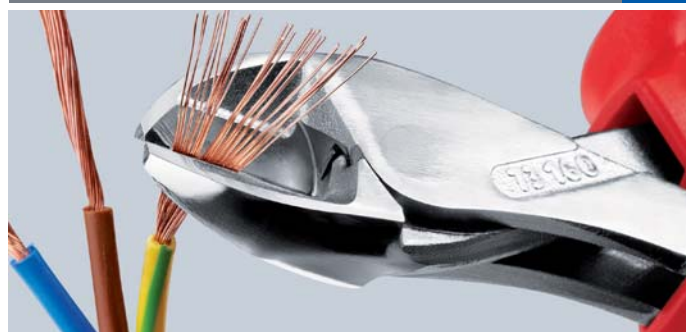

Powerful, light and universal

Cuts precisely finest strands as well as multi-core cables and piano wires

- > box-joint design: highest stability with low weight
- > doubly supported joint axis for heaviest duty
- > high cutting capacity with very little effort thanks to the optimum co-ordination of cutting-edge angle and leverage ratio
- > large opening width for thicker cables
- > cuts precisely, even through fine copper wires
- > compact, low-weight construction
- > universally usable, in the assembly, maintenance and production
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

Product video



X-Cut®

40% less effort required

compared to standard diagonal cutters of the same length. With double mounted hinged joint.



73 06 160

1000 V

| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Cutting capacities | | | | | |
|-------------|--------------|------|---------------|--|--------------------|------|------|------|------|-----|
| | | | | | Ø mm | Ø mm | Ø mm | Ø mm | Ø mm | g |
| 73 06 160 | 075141 | 160 | chrome plated | insulated with multi-component grips, VDE-tested | 4.8 | 3.8 | 2.7 | 2.2 | 12.0 | 175 |

High Leverage Diagonal Cutters

DIN ISO 5749 IEC 60900 DIN EN 60900

74

- > with integrated forged axle for heaviest duty
- > suitable for all types of wire including piano wire
- > high cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > precision cutting edges additionally induction-hardened, cutting edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

Length 250 mm

the 250-mm-long diagonal cutter is suitable for copper conductors up to 16 mm² and aluminium conductors up to 35 mm²



74 06 200

1000 V



74 07 200

1000 V

20% less effort required

compared to conventional diagonal cutters of the same length. With integrated forged joint axle.


| Article No. | EAN 4003773- | ↔ mm | Pliers | Handles | Cutting capacities | | | g |
|-------------|--------------|------|---------------|--|--------------------|------|------|-----|
| | | | | | Ø mm | Ø mm | Ø mm | |
| 74 06 160 | 040705 | 160 | chrome plated | insulated with multi-component grips, VDE-tested | 3.4 | 2.5 | 2.0 | 215 |
| 74 06 180 | 022985 | 180 | | | 3.8 | 2.7 | 2.2 | 280 |
| 74 06 200 | 033820 | 200 | | | 4.2 | 3.0 | 2.5 | 308 |
| 74 06 250 | 041955 | 250 | | | 4.6 | 3.5 | 3.0 | 453 |
| 74 07 200 | 018414 | 200 | chrome plated | with dipped insulation, VDE-tested | 4.2 | 3.0 | 2.5 | 328 |
| 74 07 250 | 018421 | 250 | | | 4.6 | 3.5 | 3.0 | 510 |

Pliers Wrench

insulated
IEC 60900 DIN EN 60900

86
07



- > pliers and a wrench in a single tool
- > also excellent for gripping, holding, pressing and bending workpieces
zero backlash jaw pressure prevents damage to edges of sensitive and soft nuts (Cu)
- > with scale for presetting the opening width apart from the workpiece
- > no unintentional shift of the gripping jaws and no slipping of the joint
- > parallel jaws give a more solid grip; the construction gives infinite adjustment of all widths up to the specified maximum size
- > the action of the jaws allows quick tightening and release of bolted connections using the ratchet principle
- > lever transmission greater than 10 : 1 for strong gripping power
- > Chrome vanadium electric steel, forged, oil-hardened

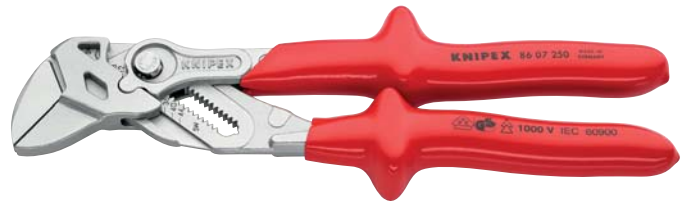

86 07 250
⚡ 1000 V



Scale for setting the opening width, apart from the workpiece

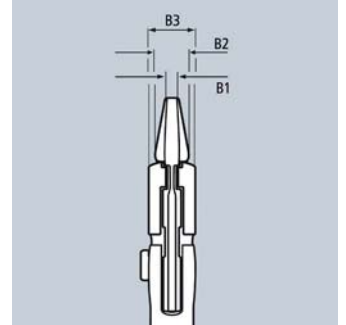

| Article No. | EAN 4003773- | ↔ mm | ⚡ 1000 V | Pliers | Handles | Inch | mm | Adjustment positions | Dimensions | | | g |
|-------------|-----------------|---------|----------|---------------|------------------------------------|----------|--------|-------------------------|------------|----------|----------|-------|
| | | | | | | | | | B1 mm | B2 mm | B3 mm | |
| 86 07 250 | 065067 | 250 | | chrome plated | with dipped insulation, VDE-tested | 1 3/4 | 46 | 17 | 8.0 | 8.0 | 14 | 615 |

KNIPEX Alligator®

Water Pump Pliers
DIN ISO 8976 IEC 60900 DIN EN 60900

88


- > more output and comfort compared to conventional water pump pliers of the same length: 9-notch adjustment positioning for 30% more gripping capacity
- > good access to the workpiece due to slim size in the head and joint area
- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: low wear and stable gripping
- > box-joint design: high stability because of the double guide guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



88 06 250
⚡ 1000 V



88 07 250
⚡ 1000 V



Alligator®

| Article No. | EAN 4003773- | ↔ mm | ⚡ 1000 V | Pliers | Handles | Ø Inch | Ø mm | mm | Adjustment positions | g |
|-------------|-----------------|---------|----------|---------------|--|------------|----------|--------|-------------------------|-------|
| | | | | | | 2 | 50 | 46 | | |
| 88 06 250 | 039303 | 250 | | chrome plated | insulated with multi-component grips, VDE-tested | 2 | 50 | 46 | 9 | 374 |
| 88 07 250 | 019343 | 250 | | chrome plated | with dipped insulation, VDE-tested | 2 | 50 | 46 | 9 | 420 |
| 88 07 300 | 022350 | 300 | | chrome plated | with dipped insulation, VDE-tested | 2 3/4 | 70 | 60 | 9 | 661 |

KNIPEX Cobra® VDE

Hightech Water Pump Pliers, insulated
DIN ISO 8976 IEC 60900 DIN EN 60900

87
26

- > adjustment by shifting one jaw directly on to the workpiece: fast, reliable and comfortable handling
- > opening at the touch of a button apart from the workpiece
- > fine adjustment to fit very different workpiece sizes with a comfortable handle position
- > good access to the workpiece due to slim size in the head and joint area
- > self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: low wear and stable gripping
- > box-joint design: high stability because of the double guide
- > guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



87 26 250





Cobra®



Quick setting without using a push-button







Just push the pliers handle to adjust!



1000 V

The adjustment procedure to adapt to the workpiece is easy and reliable with the KNIPEX Cobra® VDE: place the upper gripping jaw of the opened pliers on the workpiece, push pliers handle to close, done!

| Article No. | EAN | ↔ mm | | Pliers | Handles | ∅ Inch | ∅ mm | ∅ mm | Adjustment positions | g |
|-------------|--------|------|---|---------------|--|--------|------|------|----------------------|-----|
| 87 26 250 | 071495 | 250 |     | chrome plated | insulated with multi-component grips, VDE-tested | 2 | 50 | 46 | 24 | 340 |

Precision Tweezers

IEC 60900 DIN EN 60900

92

- > tested according to IEC 60900
- > with dipped insulation
- > nickel plated
- > Spring steel, high-strength

92 27 61

for ultra fine mounting work; extra fine tips; straight pattern; gripping surfaces matt finished for optimum grip

92 27 62

straight pattern; gripping surfaces with fine transverse serration

92 37 64

angled tips; gripping surfaces with fine transverse serration

92 67 63

straight pattern; knurled gripping surfaces



92 27 61
 ⚡ 1000 V ✳️ ◻



92 27 62
 ⚡ 1000 V ✳️ ▨



92 37 64
 ⚡ 1000 V ✳️ ∠45° ▨



92 67 63
 ⚡ 1000 V ✳️ ▨

| Article No. | EAN 4003773- | ↔ mm | | Finish | ⚖ g |
|-------------|--------------|------|--------------------|------------------------|-----|
| 92 27 61 | 054757 | 130 | ⚡ 1000 V ✳️ ◻ | with dipped insulation | 32 |
| 92 27 62 | 054764 | 150 | ⚡ 1000 V ✳️ ▨ | with dipped insulation | 35 |
| 92 37 64 | 054856 | 150 | ⚡ 1000 V ✳️ ∠45° ▨ | with dipped insulation | 34 |
| 92 67 63 | 054931 | 145 | ⚡ 1000 V ✳️ ▨ | with dipped insulation | 43 |

Cable Shears

IEC 60900 DIN EN 60900

95
0

- > for copper single conductors up to 16 mm², multiple stranded wires up to 50 mm², fine stranded up to 70 mm² and aluminium conductors multiple stranded wires up to 70 mm²
- > easy cutting with one-hand operation due to high transmission ratio
- > not suitable for steel wire and hard drawn copper conductors
- > precision ground, hardened blades
- > no crushing, slight deformation of the cable only
- > with guard
- > adjustable bolted joint
- > shears body: surgical steel, stainless, vacuum-hardened
- > handles: plastic, impact-proof



95 06 230
 ⚡ 1000 V ⚡ ⚙️ ⚙️ ⚙️

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Cutting capacities | | | ⚖ g |
|-------------|--------------|------|---------------------|----------|-------------------------------|--------------------|-----------------|-----|-----|
| | | | | | | ⚡ | ⚡ | AWG | |
| | | | | | | Ø mm | mm ² | | |
| 95 06 230 | 006305 | 230 | ⚡ 1000 V ⚡ ⚙️ ⚙️ ⚙️ | polished | plastic insulated, VDE-tested | 16 | 50 | 1/0 | 274 |

Cable Shears

IEC 60900 DIN EN 60900

95

- > for cutting copper and aluminium single conductors as well as multiple stranded cables
- > not suitable for steel wire and hard drawn copper conductors
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > easy cutting with one-hand operation
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint, self-retaining screw
- > High-grade special tool steel, forged, oil-hardened

Style 2

internal opening spring, protected and captive



Cut performed with a Diagonal Cutter:
high effort required, inaccurate cut,
considerable deforming and crushing
of the cable
















Cut performed with a Cable Shear:
easy, clean cut without any deformation
of the cable



95 16 165
⚠ 1000 V    



95 26 165
⚠ 1000 V    

| Article No. | EAN 4003773- | ↔ mm | ⚠ 1000 V     | Style | Tool | Handles | Cutting capacities | | | ⚖ g |
|-------------|-----------------|---------|--|-------|---------------|--|--------------------|-----------------|-----|--------|
| | | | | | | | ⊘ mm | mm ² | AWG | |
| 95 16 165 | 039648 | 165 | ⚠ 1000 V     | 1 | chrome plated | insulated with multi-component grips, VDE-tested | 15 | 50 | 1/0 | 262 |
| 95 26 165 | 069980 | 165 | ⚠ 1000 V      | 2 | chrome plated | insulated with multi-component grips, VDE-tested | 15 | 50 | 1/0 | 275 |

Cable Shears

with twin cutting edge

IEC 60900 DIN EN 60900

95
1



Initial cut: using the front cutting edge to cut the insulating sheath on larger cable diameters leaves an ergonomic handle opening width.



Final cut: after cutting the sheath in the front profile the conductors in the rear part are cut. Initial cut in the front profile, final cut in the rear profile – to keep it as easy as possible.

- > for cutting copper and aluminium cables
- > not suitable for steel wire and hard drawn copper conductors
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > easy cutting with one-hand operation
- > by dividing the cutting actions into initial cut (insulating sheath in the front cutting area) and final cut (conductor in the back cutting area), cables up to Ø 20 mm can be cut in one-hand operation
- > less effort required due to favourable lever ratio and optimised cutting-edge geometry
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint, self-retaining screw
- > High-grade special tool steel, forged, oil-hardened



95 16 200



95 17 200

| Article No. | EAN 4003773- | ↔ mm | Tool | Handles | Cutting capacities | | | g |
|-------------|-----------------|---------|---------------|--|--------------------|-----------------|-----|-----|
| | | | | | Ø mm | mm ² | AWG | |
| 95 16 200 | 026761 | 200 | chrome plated | insulated with multi-component grips, VDE-tested | 20 | 70 | 2/0 | 340 |
| 95 17 200 | 026952 | 200 | chrome plated | with dipped insulation, VDE-tested | 20 | 70 | 2/0 | 360 |

Cable Shears

IEC 60900 DIN EN 60900

95
1



Large cutting capacity: max. 27 mm dia. / 150 mm²

- > for cutting copper and aluminium single conductors as well as multiple stranded cables
- > not suitable for steel wire and wire ropes precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > less effort required due to favourable lever ratio and optimised cutting-edge geometry
- > short design, length only 500 mm
- > low weight
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint
- > Cutter head: vanadium electric steel, forged, oil-hardened
- > handles: aluminium tube, high-strength



95 17 500

| Article No. | EAN 4003773- | ↔ mm | Head | Handles | Cutting capacities | | | g |
|-------------|-----------------|---------|----------|------------------------------------|--------------------|-----------------|-----|------|
| | | | | | Ø mm | mm ² | AWG | |
| 95 17 500 | 026785 | 500 | polished | with dipped insulation, VDE-tested | 27 | 150 | 5/0 | 1477 |

Cable Shears

IEC 60900 DIN EN 60900









95

2

- > for cutting copper and aluminium single conductors as well as multiple stranded cables
- > not suitable for steel wire and wire ropes
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > favourable lever ratio due to toggle lever
- > guard prevents operators' fingers being pinched
- > adjustable bolted joint
- > bolted cutter head, replaceable
- > cutter head: high-grade chrome vanadium electric steel, forged, oil-hardened
- > handles: steel tube



95 27 600
 ⚠ 1000V    

| Article No. | EAN 4003773- | ↔ mm | ⚠ 1000V     | Head | Handles | Cutting capacities | | AWG | ⚖ g |
|-------------|-----------------|---|---|----------|------------------------------------|--------------------|-----------------|-----|--------|
| | | | | | | ∅ mm | mm ² | | |
| 95 27 600 | 021797 | 600 |     | polished | with dipped insulation, VDE-tested | 27 | 150 | 5/0 | 2301 |
| 95 29 600 | 021803 | Spare cutter head for 95 21 600 / 95 27 600 | | | | | | | |

Cable Cutters

ratchet action

IEC 60900 DIN EN 60900

95

3

- > for cutting copper and aluminium single conductors as well as multiple stranded cables
- > not suitable for steel wire and wire ropes
- > precision ground, hardened blades
- > clean and smooth cut without crushing and deformation
- > one-hand operation using ratchet principle
- > little handforce required due to very high transmission ratio
- > two-stage ratchet drive for easy cutting
- > simple handling as a result of low weight and compact design – can be used even in confined areas
- > guard prevents operators' fingers being pinched
- > High-grade special tool steel, forged, oil-hardened



95 36 250
 ⚠ 1000V    



95 36 280
 ⚠ 1000V    



Ratchet principle and two-stage ratchet drive for easier cutting













Product video
95 36 250



Product video
95 36 280



95 36 280
 suitable for aluminium sector
 cable up to 4 x 150 mm²

| Article No. | EAN 4003773- | ↔ mm | ⚠ 1000V     | Tool | Handles | Cutting capacities | | MCM | ⚖ g |
|-------------|-----------------|---|---|-----------------|--|--------------------|-----------------|-----|--------|
| | | | | | | ∅ mm | mm ² | | |
| 95 36 250 | 026884 | 250 |     | black lacquered | insulated with multi-component grips, VDE-tested | 32 | 240 | 500 | 652 |
| 95 36 280 | 026891 | 280 |     | black lacquered | insulated with multi-component grips, VDE-tested | 52 | 380 | 750 | 835 |
| 95 39 250 | 022244 | Movable spare blade for 95 31 250 / 95 36 250 | | | | | | | |
| 95 39 280 | 025283 | Movable spare blade for 95 31 280 / 95 36 280 | | | | | | | |

Cable Cutter

ratchet principle, 3-stage
IEC 60900 DIN EN 60900

95
3

Sturdy. Easy to use. Stable.
Innovative ratchet-drive
For cable up to 60 mm diameter

- > easy handling due to low weight (830 g) and compact construction (320 mm length) – also usable in confined areas
- > cutting through copper and aluminium cables with diameters of up to 60 mm in one-hand and two-hand operation
- > hardened cutting edges, precisely ground, cut smoothly and neatly without crushing
- > for cutting copper and aluminium single conductors as well as multiple stranded cables (not suitable for steel wire and wire ropes)
- > innovative three-stage ratchet-drive with high leverage for easy cutting in one-hand and two-hand operation
- > fixed handle with support area for putting down the pliers when cutting
- > High-grade special tool steel, forged, oil-hardened




95 36 320

| Article No. | EAN 4003773- | ↔ mm | Tool | Handles | Cutting capacities | | | g |
|--------------|--------------|---|------|--|--------------------|-----------------|------|-----|
| | | | | | Ø mm | mm ² | MCM | |
| 95 36 320 | 075189 | 320 | | black atramentized insulated with multi-component grips, VDE-tested | 60 | 600 | 1200 | 830 |
| 95 39 320 01 | 075714 | Pivot cutter repair kit for 95 32 320 and 95 36 320 | | | | | | |
| 95 39 320 02 | 075721 | Fixed cutter repair kit for 95 32 320 and 95 36 320 | | | | | | |

Cable Cutter

ratchet action
for steel wire armoured cables (SWA cable)

95
36

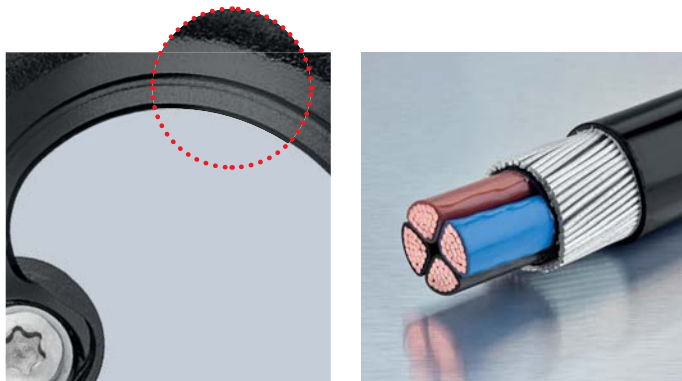

Precision milled and induction hardened cutting edge

Product video



Cuts through steel wire armoured cables with a diameter of up to 45 mm / 380 mm² (e.g. 4 x 95 mm²) using one or two-handed operation

Sturdy. Easy to use. Stable.

- > simple handling due to low weight (800 g) and compact design (315 mm length) – can also be used in confined areas
- > precision ground blades and induction hardened cutting edges cut smoothly and neatly without crushing
- > innovative high leverage three-stage ratchet-drive
- > support area for putting down the pliers when cutting
- > not suitable for cutting ACSR cable and wire rope!
- > High-grade special tool steel, forged, multi stage oil-hardened



95 36 315 A

| Article No. | EAN 4003773- | ↔ mm | Tool | Handles | Cutting capacities | | | g |
|----------------|--------------|--|------|---|--------------------|-----------------|-----|-----|
| | | | | | Ø mm | mm ² | MCM | |
| 95 36 315 A | 078579 | 315 | | black lacquered insulated with multi-component grips, VDE-tested | 45 | 380 | 750 | 800 |
| 95 39 315 A 01 | 078586 | Pivot cutter repair kit for 95 32 315 A and 95 36 315 A (ratchet action) | | | | | | |
| 95 39 315 A 02 | 078593 | Fixed cutter repair kit for 95 32 315 A and 95 36 315 A (ratchet action) | | | | | | |

Wire Rope and ACSR-Cable Cutter

IEC 60900 DIN EN 60900

95
7



- > for wire ropes and steel rods, copper and aluminium cables
- > suitable for cutting overhead line cables with strain relief wire (ACSR cables)
- > angular cutting blades allow cutting of single rope wire
- > optimum transmission ratio for high cutting performance
- > bolted cutter head, replaceable low weight
- > cutter head: high-grade special tool steel, multi stage oil-hardened
- > handles: aluminium, highstrength



95 77 600

| Article No. | EAN 4003773-025313 | ↔ mm 600 | | Head polished | Handles with dipped insulation | Cutting capacities | | | | g 2359 |
|-------------|--------------------|---|--|---------------|--------------------------------|---------------------|-----------|----------|---------|--------|
| | | | | | | mm ² 150 | ∅ mm 14.0 | ∅ mm 9.0 | AWG 5/0 | |
| 95 79 600 | 025337 | Spare cutter head for 95 71 600 / 95 77 600 | | | | | | | | |

Crimping Pliers for end sleeves (ferrules)

IEC 60900 DIN EN 60900

97
68

- > for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4 in the range from 0.25 up to 2.5 mm²
- > crimping in marked trapezoidal dies for reliable connections between the sleeve and the conductor
- > Vanadium electric steel; forged, oil-hardened




97 68 145 A

| Article No. | EAN 4003773-071754 | ↔ mm 145 | | | Head polished | Handles insulated with multi-component grips, VDE-tested | Capacity | AWG | Number of crimping positions | g |
|-------------|--------------------|----------|--|--|---------------|--|----------------------------|---------|------------------------------|-----|
| | | | | | | | mm ² 0.25 - 2.5 | 23 - 13 | 4 | 175 |
| 97 68 145 A | 071754 | 145 | | | polished | insulated with multi-component grips, VDE-tested | 0.25 - 2.5 | 23 - 13 | 4 | 175 |

Crimping Pliers for end sleeves (ferrules)

IEC 60900 DIN EN 60900

97



- > for crimping end sleeves (ferrules) according to DIN 46228 parts 1 + 4 from 0.25 to 16 mm²
- > easy crimping due to optimised transmission ratio
- > light and slim design
- > crimping in marked half-round dies for reliable connections between the sleeve and the conductor
- > 9 particularly deep dies with conical side faces
- > Special tool steel, forged, oil-hardened

97 78 180




| Article No. | EAN 4003773-072003 | ↔ mm 180 | | | Head polished | Handles insulated with multi-component grips, VDE-tested | Capacity | AWG | Number of crimping positions | g |
|-------------|--------------------|----------|--|--|---------------|--|---------------------------|--------|------------------------------|-----|
| | | | | | | | mm ² 0.25 - 16 | 23 - 5 | 9 | 254 |
| 97 78 180 | 072003 | 180 | | | polished | insulated with multi-component grips, VDE-tested | 0.25 - 16 | 23 - 5 | 9 | 254 |

Open End Wrenches


IEC 60900 DIN EN 60900

98
0

- > jaw 15° angled
- > basic tool chrome plated
- > Chrome vanadium steel, forged, oil-hardened

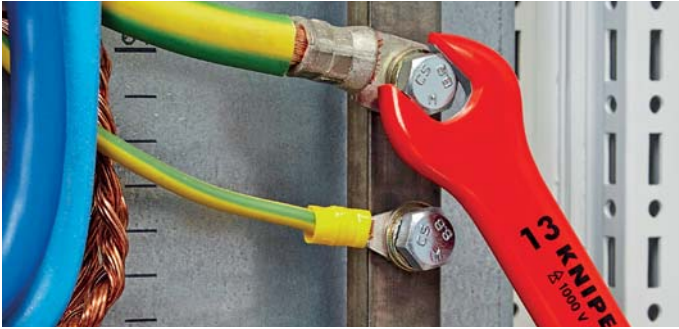

98 00 14
⚡ 1000 V ⚡

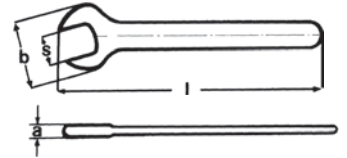

| Article No. | EAN 4003773- | | Width across flats S mm | Width across flats S Inch | Length l max. mm | Head width b max. mm | Head thickness a max. mm | ⚖ g | |
|-------------|-----------------|------------|----------------------------|------------------------------|---------------------|-------------------------|-----------------------------|--------|-----|
| 98 00 07 | 019824 | ⚡ 1000 V ⚡ | 7.0 | | 105.0 | 20.0 | 4.0 | 15 | |
| 98 00 08 | 019831 | | 8.0 | | 105.0 | 22.0 | 4.0 | 31 | |
| 98 00 09 | 019848 | | 9.0 | | 105.0 | 24.0 | 4.0 | 29 | |
| 98 00 10 | 019893 | | 10.0 | | 105.0 | 27.0 | 5.0 | 40 | |
| 98 00 11 | 019909 | | 11.0 | | 120.0 | 30.0 | 5.5 | 45 | |
| 98 00 12 | 019923 | | 12.0 | | 125.0 | 32.0 | 5.5 | 70 | |
| 98 00 13 | 019930 | | 13.0 | | 130.0 | 34.0 | 6.5 | 68 | |
| 98 00 14 | 019947 | | 14.0 | | 135.0 | 35.0 | 6.5 | 86 | |
| 98 00 15 | 019954 | | 15.0 | | 145.0 | 37.0 | 7.0 | 80 | |
| 98 00 16 | 019961 | | 16.0 | | 155.0 | 38.0 | 7.0 | 112 | |
| 98 00 17 | 019978 | | 17.0 | | 155.0 | 42.0 | 8.0 | 119 | |
| 98 00 18 | 019985 | | 18.0 | | 160.0 | 44.0 | 8.0 | 149 | |
| 98 00 19 | 019992 | | 19.0 | | 165.0 | 47.0 | 9.0 | 154 | |
| 98 00 22 | 020004 | | 22.0 | | 190.0 | 52.0 | 9.0 | 216 | |
| 98 00 24 | 020011 | | 24.0 | | 210.0 | 56.0 | 9.0 | 262 | |
| 98 00 27 | 020028 | | 27.0 | | 215.0 | 63.0 | 9.0 | 307 | |
| 98 00 1/4" | 019886 | | | | 1/4 | 108.0 | 20.0 | 4.0 | 32 |
| 98 00 5/16" | 020073 | | | | 5/16 | 108.0 | 22.0 | 4.0 | 36 |
| 98 00 3/8" | 020042 | | | | 3/8 | 108.0 | 27.0 | 5.0 | 37 |
| 98 00 7/16" | 020097 | | | | 7/16 | 120.7 | 30.0 | 5.5 | 53 |
| 98 00 1/2" | 019879 | | | | 1/2 | 139.7 | 34.0 | 6.5 | 60 |
| 98 00 9/16" | 020110 | | | | 9/16 | 152.4 | 35.0 | 6.5 | 102 |
| 98 00 5/8" | 020080 | | | | 5/8 | 165.1 | 38.0 | 7.0 | 124 |
| 98 00 3/4" | 020035 | | | | 3/4 | 190.5 | 47.0 | 9.0 | 164 |

Adjustable Wrench

IEC 60900 DIN EN 60900

98
07

- > parallel smooth gripping jaws
- > continuously variable gripping width
- > with scaling for presetting the width apart from the workpiece
- > Chrome Vanadium steel



98 07 250
⚡ 1000 V ⚡ ∠22° ⚡

| Article No. | EAN 4003773- | ↔ mm | | Tool | Handle | ⚡ mm | ⚡ Inch | Jaw width mm | Head width mm | Width mm | Depth mm | ⚖ g |
|-------------|-----------------|---------|-------------------|---------------|------------------------|---------|-----------|-----------------|------------------|-------------|-------------|--------|
| 98 07 250 | 071518 | 260 | ⚡ 1000 V ⚡ ∠22° ⚡ | chrome plated | with dipped insulation | 30 | 1 1/8 | 8.0 | 16.0 | 73.0 | 20.0 | 500 |

Box Wrenches

IEC 60900 DIN EN 60900


98

0

- > cranked
- > basic tool chrome plated
- > Chrome vanadium steel, forged, oil-hardened



98 01 14

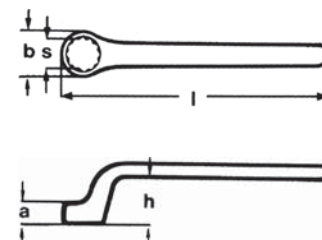

| Article No. | EAN 4003773- | | Width across flats S mm | Length l max. mm | Head width b max. mm | Head thickness a max. mm | Depth of crank h max. mm | g |
|-------------|--------------|--|-------------------------|------------------|----------------------|--------------------------|--------------------------|-----|
| 98 01 07 | 020134 | | 7.0 | 150.0 | 12.0 | 7.0 | 18.0 | 55 |
| 98 01 08 | 020141 | | 8.0 | 155.0 | 14.0 | 7.0 | 19.0 | 68 |
| 98 01 09 | 020158 | | 9.0 | 165.0 | 15.5 | 8.0 | 19.0 | 78 |
| 98 01 10 | 020196 | | 10.0 | 160.0 | 17.0 | 9.0 | 20.0 | 75 |
| 98 01 11 | 020202 | | 11.0 | 165.0 | 18.5 | 10.0 | 21.0 | 93 |
| 98 01 12 | 020226 | | 12.0 | 185.0 | 18.5 | 10.0 | 23.0 | 118 |
| 98 01 13 | 020233 | | 13.0 | 185.0 | 21.5 | 11.0 | 23.0 | 125 |
| 98 01 14 | 020240 | | 14.0 | 195.0 | 23.0 | 12.0 | 24.0 | 147 |
| 98 01 15 | 020257 | | 15.0 | 200.0 | 24.0 | 12.0 | 24.0 | 143 |
| 98 01 16 | 020264 | | 16.0 | 200.0 | 26.0 | 12.0 | 26.0 | 172 |
| 98 01 17 | 020271 | | 17.0 | 205.0 | 27.0 | 13.0 | 26.0 | 184 |
| 98 01 18 | 020288 | | 18.0 | 210.0 | 29.0 | 13.0 | 28.0 | 210 |
| 98 01 19 | 020295 | | 19.0 | 225.0 | 30.0 | 14.0 | 28.0 | 245 |
| 98 01 22 | 020301 | | 22.0 | 225.0 | 35.0 | 15.0 | 30.0 | 278 |
| 98 01 24 | 020318 | | 24.0 | 265.0 | 38.0 | 16.0 | 30.0 | 415 |

Nut Drivers

with screwdriver handle

EC 60900 DIN EN 60900

98

0

- > ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- > handle design prevents rolling
- > Chrome vanadium molybdenum steel



98 03 10

| Article No. | EAN 4003773- | ↔ mm | | Point | Handle | Width across flats S mm | Blade length mm | Handle length mm | Head dia. mm | g |
|-------------|--------------|------|--|-----------|---|-------------------------|-----------------|------------------|--------------|-----|
| 98 03 04 | 071679 | 230 | | burnished | insulating multi-component handle, VDE-tested | 4.0 | 125.0 | 107 | 9.0 | 70 |
| 98 03 05 | 071686 | 230 | | | | 5.0 | 125.0 | 107 | 10.0 | 70 |
| 98 03 055 | 026082 | 232 | | | | 5.5 | 125.0 | 107 | 11.0 | 87 |
| 98 03 06 | 026099 | 232 | | | | 6.0 | 125.0 | 107 | 12.0 | 88 |
| 98 03 07 | 026105 | 237 | | | | 7.0 | 125.0 | 112 | 14.0 | 123 |
| 98 03 08 | 024095 | 237 | | | | 8.0 | 125.0 | 112 | 15.0 | 125 |
| 98 03 09 | 026112 | 237 | | | | 9.0 | 125.0 | 112 | 16.0 | 129 |
| 98 03 10 | 026129 | 237 | | | | 10.0 | 125.0 | 112 | 17.0 | 118 |
| 98 03 11 | 026136 | 237 | | | | 11.0 | 125.0 | 112 | 19.0 | 148 |
| 98 03 12 | 026143 | 237 | | | | 12.0 | 125.0 | 112 | 20.0 | 150 |
| 98 03 13 | 026150 | 237 | | | | 13.0 | 125.0 | 112 | 21.0 | 152 |


Nut Drivers

with T-handle

IEC 60900 DIN EN 60900

98
0

> Special tool steel, oil-hardened

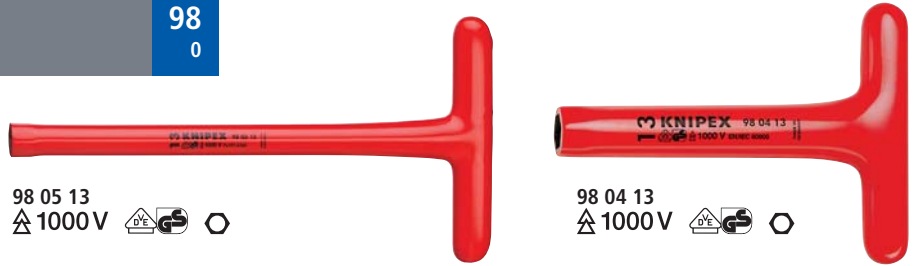

98 05 13
⚡ 1000V

98 04 13
⚡ 1000V

| Article No. | EAN 4003773- | ↔ mm | | Width across flats S mm | Handle length max. mm | Head dia. mm | ⚖ g |
|-------------|--------------|------|---------|-------------------------|-----------------------|--------------|-----|
| 98 04 08 | 071341 | 200 | ⚡ 1000V | 8.0 | 90 | 15.0 | 344 |
| 98 04 10 | 026167 | 200 | | 10.0 | 155 | 19.5 | 324 |
| 98 04 13 | 026198 | 200 | | 13.0 | 155 | 23.5 | 344 |
| 98 04 17 | 026211 | 200 | | 17.0 | 155 | 28.5 | 426 |
| 98 04 19 | 020424 | 200 | | 19.0 | 155 | 31.0 | 525 |
| 98 04 22 | 026228 | 200 | | 22.0 | 155 | 34.5 | 560 |
| 98 05 13 | 026273 | 300 | ⚡ 1000V | 13.0 | 155 | 23.5 | 409 |
| 98 05 17 | 026297 | 300 | | 17.0 | 155 | 28.5 | 544 |
| 98 05 19 | 026303 | 300 | | 19.0 | 155 | 31.0 | 674 |

Screwdrivers for hexagon socket screws

IEC 60900 DIN EN 60900

98
1

> ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
> handle design prevents rolling
> Chrome vanadium molybdenum steel



98 13 30
⚡ 1000V

| Article No. | EAN 4003773- | ↔ mm | | Tip | Handle | Width across flats S mm | Blade length mm | Length of non-insulated blade mm | Handle length mm | ⚖ g |
|-------------|--------------|------|---------|-----------|---|-------------------------|-----------------|----------------------------------|------------------|-----|
| 98 13 20 | 071693 | 175 | ⚡ 1000V | burnished | insulating multi-component handle, VDE-tested | 2.0 | 75.0 | 15.0 | 102 | 40 |
| 98 13 25 | 026334 | 177 | | | | 2.5 | 75.0 | 15.0 | 102 | 32 |
| 98 13 30 | 026341 | 182 | | | | 3.0 | 75.0 | 15.0 | 107 | 49 |
| 98 13 40 | 026358 | 182 | | | | 4.0 | 75.0 | 15.0 | 107 | 55 |
| 98 13 50 | 026365 | 187 | | | | 5.0 | 75.0 | 15.0 | 112 | 82 |
| 98 13 60 | 026372 | 212 | | | | 6.0 | 100.0 | 15.0 | 112 | 98 |

Screwdrivers for hexagon socket screws with T-handle

IEC 60900 DIN EN 60900

98
1

> Special tool steel, oil-hardened



98 15 08
⚡ 1000V

98 14 08
⚡ 1000V

| Article No. | EAN 4003773- | ↔ mm | | Width across flats S mm | Length of non-insulated blade ± 2 mm | T-Handle length mm | ⚖ g |
|-------------|--------------|------|---------|-------------------------|--------------------------------------|--------------------|-----|
| 98 14 05 | 020431 | 120 | ⚡ 1000V | 5.0 | 9.0 | 90.0 | 220 |
| 98 14 06 | 020448 | 120 | | 6.0 | 10.0 | 90.0 | 208 |
| 98 14 08 | 020455 | 120 | | 8.0 | 11.0 | 90.0 | 286 |
| 98 15 05 | 020479 | 250 | ⚡ 1000V | 5.0 | 9.0 | 90.0 | 363 |
| 98 15 06 | 020486 | 250 | | 6.0 | 10.0 | 90.0 | 452 |
| 98 15 08 | 020493 | 250 | | 8.0 | 11.0 | 90.0 | 359 |

Screwdrivers for slotted screws

IEC 60900 DIN EN 60900

98
2

- > ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- > handle design prevents rolling
- > Chrome vanadium molybdenum steel



98 20 55
 1000 V

98 21 45

especially for meter assembly with blade length of 180 mm

| Article No. | EAN 4003773- | ↔ mm | | Point | Handle | Blade width mm | Blade thickness mm | Blade length mm | Length of non-insulated blade mm | Handle length mm | ⚖ g |
|-------------|--------------|------|--|-----------|---|----------------|--------------------|-----------------|----------------------------------|------------------|-----|
| 98 20 10 | 026396 | 320 | | burnished | insulating multi-component handle, VDE-tested | 10.0 | 1.6 | 200 | 15 | 120 | 184 |
| 98 20 25 | 062325 | 177 | | | | 2.5 | 0.4 | 75 | 15 | 102 | 32 |
| 98 20 30 | 062332 | 202 | | | | 3.0 | 0.5 | 100 | 15 | 102 | 35 |
| 98 20 35 | 024217 | 202 | | | | 3.5 | 0.6 | 100 | 15 | 102 | 35 |
| 98 20 40 | 026402 | 202 | | | | 4.0 | 0.8 | 100 | 15 | 102 | 38 |
| 98 20 55 | 024224 | 232 | | | | 5.5 | 1.0 | 125 | 15 | 107 | 69 |
| 98 20 65 | 026419 | 262 | | | | 6.5 | 1.2 | 150 | 15 | 112 | 105 |
| 98 20 80 | 024231 | 295 | | | | 8.0 | 1.2 | 175 | 15 | 120 | 152 |
| 98 21 45 | 026426 | 287 | | burnished | insulating multi-component handle, VDE-tested | 4.5 | 0.8 | 180 | 15 | 107 | 66 |

Screwdrivers (Slim) for slotted screws

IEC 60900 DIN EN 60900

98
2

- > Reduced blade isolation diameter for recessed spring and screw elements
- > ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- > handle design prevents rolling
- > Chrome vanadium molybdenum steel



98 20 65 SL
 1000 V

| Article No. | EAN 4003773- | ↔ mm | | Point | Handle | Blade width mm | Blade thickness mm | Blade length mm | Length of non-insulated blade mm | Handle length mm | ⚖ g |
|-------------|--------------|------|--|-----------|---|----------------|--------------------|-----------------|----------------------------------|------------------|-----|
| 98 20 35 SL | 079712 | 202 | | burnished | insulating multi-component handle, VDE-tested | 3.5 | 0.6 | 100 | 15 | 102 | 35 |
| 98 20 40 SL | 079729 | 202 | | | | 4.0 | 0.8 | 100 | 15 | 102 | 38 |
| 98 20 55 SL | 079736 | 232 | | | | 5.5 | 1.0 | 125 | 15 | 107 | 69 |
| 98 20 65 SL | 079743 | 262 | | | | 6.5 | 1.2 | 150 | 15 | 112 | 105 |

Screwdrivers for cross-recessed screws

Phillips®
IEC 60900 DIN EN 60900

98
2

- > ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- > handle design prevents rolling
- > Chrome vanadium molybdenum steel



98 24 03
 1000 V

Phillips® is a registered trademark of Phillips Screw Company

| Article No. | EAN 4003773- | ↔ mm | | Point | Handle | Size | Blade length mm | Length of non-insulated blade mm | Handle length mm | ⚖ g |
|-------------|--------------|------|--|-----------|---|------|-----------------|----------------------------------|------------------|-----|
| 98 24 00 | 026433 | 162 | | burnished | insulating multi-component handle, VDE-tested | PH0 | 60 | 15 | 102 | 32 |
| 98 24 01 | 026440 | 187 | | | | PH1 | 80 | 15 | 107 | 58 |
| 98 24 02 | 026457 | 212 | | | | PH2 | 100 | 18 | 112 | 94 |
| 98 24 03 | 026464 | 270 | | | | PH3 | 150 | 18 | 120 | 165 |
| 98 24 04 | 026471 | 320 | | | | PH4 | 200 | 18 | 120 | 244 |

Screwdrivers (Slim) for cross-recessed screws

Phillips®
IEC 60900 DIN EN 60900




98
2



98 24 02 SL
▲ 1000 V   

- > Reduced blade isolation diameter for recessed spring and screw elements
- > ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- > handle design prevents rolling
- > Chrome vanadium molybdenum steel

Phillips® is a registered trademark of Phillips Screw Company

| Article No. | EAN 4003773- | ↔ mm | | Point | Handle | Size | Blade length mm | Length of non-insulated blade mm | Handle length mm | ⚖ g |
|-------------|--------------|------|--|-----------|---|------|-----------------|----------------------------------|------------------|-----|
| 98 24 01 SL | 079750 | 187 | ▲ 1000 V    | burnished | insulating multi-component handle, VDE-tested | PH1 | 80 | 15 | 107 | 58 |
| 98 24 02 SL | 079767 | 212 | | | | PH2 | 100 | 18 | 112 | 94 |

Screwdrivers for cross-recessed screws

Pozidriv®
IEC 60900 DIN EN 60900




98
2



98 25 03
▲ 1000 V   

- > ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- > handle design prevents rolling
- > Chrome vanadium molybdenum steel

Pozidriv® is a registered trademark of European Ind. Serv. Ltd.

| Article No. | EAN 4003773- | ↔ mm | | Point | Handle | Size | Blade length mm | Length of non-insulated blade mm | Handle length mm | ⚖ g |
|-------------|--------------|------|--|-----------|---|------|-----------------|----------------------------------|------------------|-----|
| 98 25 00 | 062370 | 162 | ▲ 1000 V    | burnished | insulating multi-component handle, VDE-tested | PZ0 | 60 | 15 | 102 | 40 |
| 98 25 01 | 031260 | 187 | | | | PZ1 | 80 | 15 | 107 | 58 |
| 98 25 02 | 031277 | 212 | | | | PZ2 | 100 | 18 | 112 | 94 |
| 98 25 03 | 031284 | 270 | | | | PZ3 | 150 | 18 | 120 | 165 |
| 98 25 04 | 062387 | 320 | | | | PZ4 | 200 | 18 | 120 | 244 |

Screwdrivers (Slim) for cross-recessed screws

Pozidriv®
IEC 60900 DIN EN 60900




98
2



98 25 02 SL
▲ 1000 V   

- > Reduced blade isolation diameter for recessed spring and screw elements
- > ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- > handle design prevents rolling
- > Chrome vanadium molybdenum steel

Pozidriv® is a registered trademark of European Ind. Serv. Ltd.

| Artikel-Nr. | EAN 4003773- | ↔ mm | | Point | Handle | Size | Blade length mm | Length of non-insulated blade mm | Handle length mm | ⚖ g |
|-------------|--------------|------|--|-----------|---|------|-----------------|----------------------------------|------------------|-----|
| 98 25 01 SL | 079774 | 187 | ▲ 1000 V    | burnished | insulating multi-component handle, VDE-tested | PZ1 | 80 | 15 | 107 | 58 |
| 98 25 02 SL | 079781 | 212 | | | | PZ2 | 100 | 18 | 112 | 94 |

Screwdrivers for Torx® screws

IEC 60900 DIN EN 60900

98
2




- > ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- > handle design prevents rolling
- > Chrome vanadium molybdenum steel



98 26 30

⚡ 1000 V   

Torx® is a registered trademark of Acument Global Technologies, Inc.

| Article No. | EAN 4003773- | ↔ mm | | Point | Handle | Size | Blade length mm | Length of non-insulated blade mm | Handle length mm | ⚖ g |
|-------------|--------------|------|--|-----------|---|------|-----------------|----------------------------------|------------------|-----|
| 98 26 10 | 071709 | 160 | | burnished | insulating multi-component handle, VDE-tested | TX10 | 60 | 15 | 102 | 33 |
| 98 26 15 | 071716 | 185 | | | | TX15 | 80 | 15 | 107 | 58 |
| 98 26 20 | 071723 | 185 | ⚡ 1000 V    | | | TX20 | 80 | 15 | 107 | 58 |
| 98 26 25 | 071730 | 185 | | | | TX25 | 80 | 15 | 107 | 58 |
| 98 26 30 | 071747 | 210 | | | | TX30 | 100 | 18 | 112 | 95 |

T-handle

with driving square 3/8" or 1/2"

IEC 60900 DIN EN 60900

98





- > for use with sockets
- > quick, easy and reliable locking of attached sockets
- > basic tool chrome plated
- > High-grade special tool steel, forged, oil-hardened



98 40

⚡ 1000 V  1/2"

| Article No. | EAN 4003773- | ↔ mm | | Handle length mm | Square drive Inch | ⚖ g |
|-------------|--------------|------|---|------------------|-------------------|-----|
| 98 30 | 026488 | 200 | ⚡ 1000 V  3/8" | 165 | 3/8 | 447 |
| 98 40 | 026501 | 200 | ⚡ 1000 V  1/2" | 165 | 1/2 | 631 |

Reversible Ratchets

with driving square 3/8" or 1/2"

IEC 60900 DIN EN 60900



98

- > for use with sockets
- > reversible for clockwise and anti-clockwise directions
- > extremely smooth action
- > quick, easy and reliable locking of attached sockets
- > Chrome vanadium steel, forged



98 31

⚡ 1000 V  3/8"

| Article No. | EAN 4003773- | ↔ mm | | Square drive Inch | ⚖ g |
|-------------|--------------|------|---|-------------------|-----|
| 98 31 | 026495 | 190 | ⚡ 1000 V  3/8" | 3/8 | 324 |
| 98 41 | 026518 | 265 | ⚡ 1000 V  1/2" | 1/2 | 625 |

Extension Bars

with internal and driving square 3/8" or 1/2"

IEC 60900 DIN EN 60900

98

- > for use with sockets
- > with internal and external square
- > quick, easy and reliable locking of attached sockets
- > Chrome vanadium steel, forged



98 35 125
 ⚡ 1000V $\frac{3}{8}$ $\frac{3}{8}$



98 45 250
 ⚡ 1000V $\frac{1}{2}$ $\frac{1}{2}$

| Article No. | EAN 4003773- | ↔ mm | | Square drive Inch | ⚖ g |
|-------------|-----------------|---------|-------------------------------------|----------------------|--------|
| 98 35 125 | 020530 | 125 | ⚡ 1000V $\frac{3}{8}$ $\frac{3}{8}$ | 3/8 | 149 |
| 98 35 250 | 020547 | 250 | | 3/8 | 294 |
| 98 45 125 | 020813 | 125 | ⚡ 1000V $\frac{1}{2}$ $\frac{1}{2}$ | 1/2 | 258 |
| 98 45 250 | 020820 | 250 | | 1/2 | 490 |

Hexagon Sockets for hexagonal screws

for internal square 3/8" or 1/2"

IEC 60900 DIN EN 60900

98

- > for metric hexagonal head screws
- > basic tool chrome plated
- > Chrome Vanadium steel



98 37 17
 ⚡ 1000V $\frac{3}{8}$ $\frac{3}{8}$



98 47 17
 ⚡ 1000V $\frac{1}{2}$ $\frac{1}{2}$

| Article No. | EAN 4003773- | | Width across flats S mm | Dia. of effective tool side d max. mm | Square drive Inch | ⚖ g |
|-------------|-----------------|-------------------------------------|-------------------------------------|--|----------------------|--------|
| 98 37 10 | 020578 | ⚡ 1000V $\frac{3}{8}$ $\frac{3}{8}$ | 10.0 | 18.7 | 3/8 | 32 |
| 98 37 11 | 020585 | | 11.0 | 20.0 | 3/8 | 32 |
| 98 37 12 | 020608 | | 12.0 | 21.2 | 3/8 | 33 |
| 98 37 13 | 020615 | | 13.0 | 22.5 | 3/8 | 33 |
| 98 37 14 | 020622 | | 14.0 | 23.7 | 3/8 | 39 |
| 98 37 16 | 027263 | | 16.0 | 26.2 | 3/8 | 53 |
| 98 37 17 | 020639 | | 17.0 | 27.5 | 3/8 | 61 |
| 98 37 19 | 020646 | | 19.0 | 30.0 | 3/8 | 73 |
| 98 47 10 | 020882 | | ⚡ 1000V $\frac{1}{2}$ $\frac{1}{2}$ | 10.0 | 19.5 | 1/2 |
| 98 47 11 | 020899 | 11.0 | | 20.7 | 1/2 | 61 |
| 98 47 12 | 020912 | 12.0 | | 23.0 | 1/2 | 64 |
| 98 47 13 | 020929 | 13.0 | | 23.2 | 1/2 | 64 |
| 98 47 14 | 020943 | 14.0 | | 24.5 | 1/2 | 67 |
| 98 47 16 | 027287 | 16.0 | | 26.9 | 1/2 | 69 |
| 98 47 17 | 020967 | 17.0 | | 28.2 | 1/2 | 75 |
| 98 47 18 | 027294 | 18.0 | | 29.0 | 1/2 | 81 |
| 98 47 19 | 020974 | 19.0 | | 30.7 | 1/2 | 99 |
| 98 47 22 | 020981 | 22.0 | | 34.5 | 1/2 | 125 |
| 98 47 24 | 020998 | 24.0 | | 37.0 | 1/2 | 151 |
| 98 47 27 | 021001 | 27.0 | | 41.0 | 1/2 | 183 |

Hexagon Sockets

for internal square 3/8" or 1/2"

IEC 60900 DIN EN 60900

98

- > with double-hex
- > for imperial hexagonal head screws
- > basic tool chrome plated
- > Chrome Vanadium steel



98 37 5/8"
 ⚡ 1000 V



98 47 1/2"
 ⚡ 1000 V

| Article No. | EAN 4003773- | | Width across flats S Inch | Dia. of effective tool side d max. mm | Square drive Inch | g |
|--------------|--------------|----------|------------------------------|--|----------------------|-----|
| 98 37 5/16" | 020684 | ⚡ 1000 V | 5/16 | 16.2 | 3/8 | 30 |
| 98 37 3/8" | 020677 | | 3/8 | 18.7 | 3/8 | 31 |
| 98 37 7/16" | 020707 | | 7/16 | 20.0 | 3/8 | 31 |
| 98 37 1/2" | 020554 | | 1/2 | 22.5 | 3/8 | 33 |
| 98 37 9/16" | 020721 | | 9/16 | 23.7 | 3/8 | 39 |
| 98 37 5/8" | 020691 | | 5/8 | 26.2 | 3/8 | 51 |
| 98 37 3/4" | 020660 | | 3/4 | 30.0 | 3/8 | 71 |
| 98 47 1/2" | 020875 | ⚡ 1000 V | 1/2 | 23.2 | 1/2 | 67 |
| 98 47 9/16" | 021094 | | 9/16 | 24.5 | 1/2 | 64 |
| 98 47 5/8" | 021063 | | 5/8 | 26.9 | 1/2 | 72 |
| 98 47 11/16" | 020905 | | 11/16 | 28.2 | 1/2 | 88 |
| 98 47 3/4" | 021018 | | 3/4 | 30.7 | 1/2 | 97 |
| 98 47 7/8" | 021087 | | 7/8 | 34.5 | 1/2 | 124 |
| 98 47 1" | 020868 | | 1 | 41.0 | 1/2 | 167 |

Hexagon Sockets for hexagonal socket screws

for internal square 3/8" or 1/2"

IEC 60900 DIN EN 60900

98

- > for metric internal hexagonal head screws
- > basic tool chrome plated
- > Special tool steel



98 39 06
 ⚡ 1000 V

| Article No. | EAN 4003773- | ↔ mm | | Width across flats S mm | Length of non-insulated blade ± 2 mm | Square drive Inch | g |
|-------------|--------------|------|----------|----------------------------|---|----------------------|----|
| 98 39 05 | 020776 | 75 | ⚡ 1000 V | 5.0 | 9 | 3/8 | 59 |
| 98 39 06 | 020783 | 75 | | 6.0 | 10 | 3/8 | 58 |
| 98 39 08 | 020790 | 75 | | 8.0 | 11 | 3/8 | 71 |
| 98 49 05 | 021155 | 75 | ⚡ 1000 V | 5.0 | 9 | 1/2 | 68 |
| 98 49 06 | 021162 | 75 | | 6.0 | 10 | 1/2 | 72 |
| 98 49 08 | 021179 | 75 | | 8.0 | 11 | 1/2 | 87 |

Reversible Ratchet

with driving square 1/2"

ISO 3315 IEC 60900 DIN EN 60900

98
4

- > reversible for clockwise and anti-clockwise directions
- > very reliable retention of the actuating tools ensured by mechanically locked retaining system
- > Chrome Vanadium steel



98 42
 1000 V

| Article No. | EAN 4003773- | ↔ mm | | Square drive Inch | ⚖ g |
|-------------|--------------|------|--------|-------------------|-----|
| 98 42 | 026525 | 265 | 1000 V | 1/2 | 599 |

Torque Wrenches

with driving square, reversible

IEC 60900 DIN EN 60900 DIN EN ISO 6789

98

- > reversible for tightening of lefthanded threads
- > lockable torque adjustment
- > very reliable retention of the actuating tools ensured by mechanically locked retaining system
- > transparent insulated scale range
- > calibration certificate included
- > Chrome Vanadium steel



98 43 50
 1000 V



Transparent insulated scale range

| Article No. | EAN 4003773- | ↔ mm | | Range of Application | Square drive Inch | ⚖ g |
|-------------|--------------|------|--------|----------------------|-------------------|------|
| 98 33 25 | 072676 | 290 | 1000 V | 5 - 25 Nm | 3/8 | 1230 |
| 98 33 50 | 071761 | 385 | | 5 - 50 Nm | 3/8 | 1230 |
| 98 43 50 | 071778 | 385 | 1000 V | 5 - 50 Nm | 1/2 | 1230 |

Cable Knives

IEC 60900 DIN EN 60900

98
5

- > ergonomically improved handle shape with comfortable slip guard
- > particularly confident grip thanks to slip-proof soft components
- > thumb recess and "finger hook" at the end of the handle ensure a good transmission of force when the blade is pulled
- > solid, fixed straight blade
- > transparent protective cap
- > blade: special tool steel, oil-hardened



98 52
 1000 V



98 54
 1000 V

98 54
back of the blade plastic coated to avoid short circuits

| Article No. | EAN 4003773- | ↔ mm | | Handle | Blade length mm | ⚖ g |
|-------------|--------------|------|--------|---|-----------------|-----|
| 98 52 | 035565 | 185 | 1000 V | insulating multi-component handle, VDE-tested | 50 | 77 |
| 98 54 | 026563 | 180 | 1000 V | insulating multi-component handle, VDE-tested | 50 | 77 |

Dismantling Knives

IEC 60900 DIN EN 60900

98
5

- > ergonomically improved handle shape with comfortable slip guard
- > particularly confident grip thanks to slip-proof soft components
- > thumb recess and "finger hook" at the end of the handle ensure a good transmission of force when the blade is pulled
- > transparent protective cap

98 53 03

solid, fixed hook blade; suitable for round cables; blade: special tool steel, oil-hardened

98 53 13

narrow, fixed hook blade, sickle shaped; suitable for sector cables; blade: special tool steel, oil-hardened

98 55

solid, fixed hook blade, sickle shaped; with guide shoe at the blade point; no damage of the conductor insulation; blade: surgical steel, stainless, vacuum-hardened



Guide shoe 98 55



98 53 03
⚡ 1000 V



98 53 13
⚡ 1000 V



98 55
⚡ 1000 V

| Article No. | EAN 4003773- | ↔ mm | | Handle | Blade length mm | Radius mm | ⚖ g |
|-------------|--------------|------|----------|---|-----------------|-----------|-----|
| 98 53 03 | 026549 | 155 | ⚡ 1000 V | insulating multi-component handle, VDE-tested | 28 | 7.0 | 77 |
| 98 53 13 | 026556 | 180 | ⚡ 1000 V | insulating multi-component handle, VDE-tested | 50 | 40.0 | 77 |
| 98 55 | 022558 | 155 | ⚡ 1000 V | insulating multi-component handle, VDE-tested | 38 | 23.5 | 77 |

Cable Knife

with replaceable blade

IEC 60900 DIN EN 60900

98
5

- > straight blade with special sharpening; replaceable
- > with hinged blade guard, integrated in the handle, captive
- > back of the blade plastic coated to avoid short circuits
- > ergonomically shaped insulating handle
- > blade: surgical steel, stainless, vacuum-hardened



98 56
⚡ 1000 V

| Article No. | EAN 4003773- | ↔ mm | | Blade length mm | ⚖ g |
|-------------|--------------|-----------------------|----------|-----------------|-----|
| 98 56 | 026570 | 185 | | 50 | 64 |
| 98 56 SB | 033516 | 185 | ⚡ 1000 V | 50 | 64 |
| 98 56 09 | 030829 | Spare blade for 98 56 | | | |

Flat Nose Pliers of plastic

insulating

IEC 60900 DIN EN 60900 ASTM F1505

98
6

- > fully insulating to reduce risk of short circuit
- > for meter assembly and meter blocking
- > class C; range of use up to -40°C
- > plastic material, fibreglass-reinforced
- > handles with soft plastic zone for better grip



98 62 01

⚡ 1000V   



KNIPEX presents high-quality and sturdy plastic pliers featuring protection against bridging for working on live parts up to AC 1000V and DC 1500V.

These solid plastic pliers do not act on magnetic fields either and they are fully spark-free. They are also excellent for use in chemically aggressive environments.

| Article No. | EAN 4003773- | ↔ mm | | ⚖ g |
|-------------|-----------------|---------|---|--------|
| 98 62 01 | 073956 | 180 | ⚡ 1000V    | 120 |

Snipe Nose Pliers of plastic

insulating

IEC 60900 DIN EN 60900 ASTM F1505

98
6

- > fully insulating to reduce risk of short circuit
- > class C; range of use up to -40°C
- > plastic material, fibreglass-reinforced
- > handles with soft plastic zone for better grip



98 62 02

⚡ 1000V   



| Article No. | EAN 4003773- | ↔ mm | | ⚖ g |
|-------------|-----------------|---------|---|--------|
| 98 62 02 | 073963 | 220 | ⚡ 1000V    | 130 |

Insulating Clamp

from plastic


DIN VDE 0680-1


98
6

- > for holding insulating mats in place
- > with integrated spring
- > fully insulating to reduce risk of short circuit
- > solid plastic, fibreglass-reinforced



98 64 02

⚡ 1000V 

| Article No. | EAN 4003773- | ↔ mm | | Clamping capacity mm | ⚖ g |
|-------------|-----------------|---------|---|-------------------------|--------|
| 98 64 02 | 021193 | 150 | ⚡ 1000V  | 15 | 61 |

Plastic Slip-On Caps

conical
DIN VDE 0680-1

98
6

- > to cover bare live cable ends (max. 10 mm dia.)
- > Plastic

| Article No. | EAN 4003773- | ↔ mm | | Conductor key | ⚖ g |
|-------------|--------------|------|---------|---------------|-----|
| 98 65 01 | 021209 | 80 | ⚡ 1000V | 1 | 7 |
| 98 65 02 | 021216 | 80 | | 2 | 8 |
| 98 65 03 | 021223 | 80 | | 3 | 8 |



98 65 03
⚡ 1000V

Self-Clamping Slip-On Caps

DIN VDE 0680-1

98
6

- > to cover bare live cable ends
- > Plastic

| Article No. | EAN 4003773- | ↔ mm | | Inside dia. mm | ⚖ g |
|-------------|--------------|------|---------|----------------|-----|
| 98 65 10 | 021230 | 80 | ⚡ 1000V | 10 | 9 |
| 98 65 20 | 021247 | 100 | | 20 | 39 |
| 98 65 30 | 021261 | 110 | | 30 | 52 |



98 65 30
⚡ 1000V

Electricians' Gloves

IEC 60903 DIN EN 60903

98
6

- > for added protection when working live or close to live parts
- > classification: 0

| Article No. | EAN 4003773- | | Size | ⚖ g |
|-------------|--------------|---------|------|-----|
| 98 65 40 | 021285 | ⚡ 1000V | 9 | 290 |
| 98 65 41 | 021292 | | 10 | 288 |
| 98 65 42 | 077862 | | 11 | 290 |



98 65 40
⚡ 1000V

Insulating Mats

from rubber

IEC 61112 DIN EN 61112

98
6

- > for added protection when working live or close to live parts

| Article No. | EAN 4003773- | | Dimensions mm | Thickness mm | ⚖ g |
|-------------|--------------|---------|----------------|--------------|-------|
| 98 67 05 | 026600 | ⚡ 1000V | 500 x 500 | 1.0 | 301 |
| 98 67 10 | 026617 | | 1,000 x 1,000 | 1.0 | 1200 |
| 98 67 15 | 077831 | | 10,000 x 1,000 | 1.0 | 12000 |



98 67 05
⚡ 1000V

Stand Mats

from rubber

IEC 61112 DIN EN 61112

98
6

- > for site insulation when working live or close to live parts

| Article No. | EAN 4003773- | | Dimensions mm | Thickness mm | ⚖ g |
|-------------|--------------|---------|----------------|--------------|-------|
| 98 67 20 | 077848 | ⚡ 1000V | 1,000 x 1,000 | 4.0 | 4700 |
| 98 67 25 | 077855 | | 10,000 x 1,000 | 4.0 | 40000 |



98 67 20
⚡ 1000V

PUK® Junior Hacksaw

IEC 60900 DIN EN 60900

**98
90**

> saw blade for metal and wood with 25 teeth per inch, exchangeable



98 90
⚡ 1000 V

| Article No. | EAN | ↔ mm | | Saw blade length mm | ⚖ g |
|--------------|--------|---------|----------|------------------------|--------|
| 98 90 | 028321 | 240 | ⚡ 1000 V | 150 | 174 |

PUK® is a registered trade mark of Josef Haunstetter Sägenfabrik KG

Compact Tool Case

17 parts
with insulated tools for works on electrical installations
IEC 60900 DIN EN 60900

**98
9**

- > shock-resistant plastic case
- > equipped with a range of insulated KNIPEX tools for works on electrical installations
- > foam inserts with recesses for the tools
- > fixable partition wall
- > dimensions, exterior (W x H x D): 360 x 110 x 310 mm



98 99 11
⚡ 1000 V

| Article No. | EAN | | | | Quantity | ⚖ g |
|-----------------|--------|----------|-----------|----------------------------|--|--|
| 98 99 11 | 026624 | | | Compact Tool Case 17 parts | | 3675 |
| | | ⚡ 1000 V | 🔧 | 03 07 200 | Combination Pliers | 1 |
| | | ⚡ 1000 V | 🔪 | 70 07 160 | Diagonal Cutter | 1 |
| | | | | 98 20 35 | | 1 |
| | | ⚡ 1000 V | 🔩 | 98 20 40 | Screwdrivers for slotted screws | 1 |
| | | | 98 20 55 | | | 1 |
| | | ⚡ 1000 V | 🔩 | 98 24 00 | | Screwdriver for cross recessed screws, Phillips® |
| | | ⚡ 1000 V | 🔩 | 98 42 | Reversible Ratchet, with driving square 1/2" | 1 |
| | | ⚡ 1000 V | 🔩 | 98 45 125 | Extension Bar, with internal/external square 1/2" | 1 |
| | | | 98 45 250 | | | 1 |
| | | | | 98 47 10 | Hexagon Socket for hexagonal screws, with internal square 1/2" | 1 |
| | | | | 98 47 11 | | 1 |
| | | | | 98 47 12 | | 1 |
| | | ⚡ 1000 V | 🔩 | 98 47 13 | | 1 |
| | | | | 98 47 14 | | 1 |
| | | | | 98 47 17 | | 1 |
| | | | | 98 47 19 | | 1 |
| | | ⚡ 1000 V | 🔪 | 98 52 | Cable Knife | 1 |

Compact-Box

4 parts
with insulated pliers

00
20

- > high quality, versatile, shock-resistant plastic case
- > foam insert with honeycomb structure for variable equipment
- > dimensions, exterior (H x W x D): 65 x 327 x 275 mm

00 20 15


















all pliers VDE tested according to DIN EN/IEC 60900 1000V,
pliers finish 6

00 21 15 LE

without tools



00 20 15
1000 V  

| Article No. | EAN 4003773- | | | | Quantity |  g |
|-------------|-----------------|---|---------------------|--------------------------------|----------|--|
| 00 20 15 | 024804 | | Compact-Box 4 parts | | | 1430 |
| | |     | 03 06 180 | Combination Pliers | 1 | |
| | |     | 11 06 160 | Wire Stripper | 1 | |
| | |     | 26 16 200 | Snipe Nose Side Cutting Pliers | 1 | |
| | |     | 70 06 160 | Diagonal Cutter | 1 | |
| 00 21 15 LE | 045175 | | Tool Box empty | | | 530 |

Tool-Box

7 parts
for electrical contractors

00
21

- > high quality, versatile, shock-resistant plastic case
- > foam insert with honeycomb structure for variable equipment
- > dimensions, exterior (H x W x D): 65 x 327 x 275 mm

00 21 15



























all pliers and screwdrivers except Water Pump Pliers
VDE tested according to DIN EN/IEC 60900

00 21 15 LE

without tools



00 21 15

| Article No. | EAN 4003773- | | | | Quantity | Nominal size |  g |
|-------------|-----------------|---|------------------|---------------------------------------|----------|---|--|
| 00 21 15 | 042853 | | Tool Box 7 parts | | | | 1520 |
| | |     | 03 06 180 | Combination Pliers | Knipex | 180 mm | |
| | |     | 26 16 200 | Snipe Nose Side Cutting Pliers | | 200 mm | |
| | |     | 70 06 160 | Diagonal Cutter | | 160 mm | |
| | |  | 88 03 180 | KNIPEX Alligator® | | 180 mm | |
| | |     | 006100 | Screwdrivers for slotted screws, 160i | Wera | 0.4 x 2.5 x 80 mm | |
| | |     | 006115 | | | 0.8 x 4.0 x 100 mm | |
| | |     | 006152 | | | Screwdrivers for cross recessed Phillips® screws, 162i PH | PH1 x 80 mm |
| 00 21 15 LE | 045175 | | Tool-Box empty | | | | 530 |

Standard Tool Case

26 parts
with insulated tools for works on electrical installations
IEC 60900 DIN EN 60900

98
9

- > equipped with a range of insulated KNIPEX tools for works on electrical installations
- > shock-resistant plastic case
- > foam inserts with recesses for the tools
- > fixable partition wall
- > dimensions, exterior (H x W x D): 105 x 440 x 385 mm



98 99 12
⚠ 1000 V

| Article No. | EAN | | | | Quantity | g |
|-------------|----------------|--------------|-----------|--|----------|------|
| 98 99 12 | 4003773-026631 | | | Standard Tool Case 26 parts | | 5533 |
| | | ⚠ 1000 V ⚡ ⚠ | 03 07 200 | Combination Pliers | 1 | |
| | | ⚠ 1000 V ⚡ ⚠ | 70 07 160 | Diagonal Cutter | 1 | |
| | | | 98 00 10 | Open End Wrench | 1 | |
| | | | 98 00 11 | | 1 | |
| | | | 98 00 12 | | 1 | |
| | | ⚠ 1000 V ⚡ ⚠ | 98 00 13 | | 1 | |
| | | | 98 00 14 | | 1 | |
| | | | 98 00 17 | | 1 | |
| | | | 98 00 19 | 1 | | |
| | | ⚠ 1000 V ⚡ ⚠ | 98 53 03 | Dismantling Knife for round cables | 1 | |
| | | | 98 20 25 | Screwdrivers for slotted screws | 1 | |
| | | ⚠ 1000 V ⚡ ⚠ | 98 20 35 | | 1 | |
| | | | 98 20 40 | | 1 | |
| | | | 98 20 55 | | 1 | |
| | | | 98 24 00 | Screwdriver for cross recessed screws, Phillips® | 1 | |
| | | ⚠ 1000 V ⚡ ⚠ | 98 24 01 | | 1 | |
| | | | 98 24 02 | 1 | | |
| | | ⚠ 1000 V ⚡ ⚠ | 98 40 | T-Handle Drive, with driving square 1/2" | 1 | |
| | | | 98 47 10 | Hexagon Socket for hexagonal screws, with internal square 1/2" | 1 | |
| | | | 98 47 11 | | 1 | |
| | | | 98 47 12 | | 1 | |
| | | ⚠ 1000 V ⚡ ⚠ | 98 47 13 | | 1 | |
| | | | 98 47 14 | | 1 | |
| | | | 98 47 17 | | 1 | |
| | | | 98 47 19 | 1 | | |
| | | ⚠ 1000 V ⚡ ⚠ | 98 52 | Cable Knife | 1 | |

Tool Roll

15 parts
with insulated tools for works on electrical installations
IEC 60900 DIN EN 60900

98
9

- > tool roll made of hard-wearing polyester fabric
- > with practical, adjustable quick release fastener
- > equipped with a range of insulated KNIPEX tools for works on electrical installations



98 99 13
⚡ 1000 V

| Article No. | EAN | | | | Quantity | g |
|-------------|----------------|--------------------|-----------|---|----------|------|
| 98 99 13 | 4003773-026648 | | | Tool Roll 15 parts | | 2455 |
| | | ⚡ 1000 V ⚡ ⚡ ⚡ ⚡ ⚡ | 03 07 200 | Combination Pliers | 1 | |
| | | ⚡ 1000 V ⚡ ⚡ ⚡ ⚡ | 11 07 160 | Insulation Stripper | 1 | |
| | | ⚡ 1000 V ⚡ ⚡ ⚡ ⚡ ⚡ | 26 17 200 | Snipe Nose Side Cutting Pliers, (Stork Beak Pliers) | 1 | |
| | | ⚡ 1000 V ⚡ ⚡ ⚡ ⚡ | 70 07 160 | Diagonal Cutter | 1 | |
| | | ⚡ 1000 V ⚡ ⚡ ⚡ ⚡ ⚡ | 95 17 200 | Cable Shears, with twin cutting edge | 1 | |
| | | | 98 00 10 | | 1 | |
| | | | 98 00 13 | | 1 | |
| | | ⚡ 1000 V ⚡ | 98 00 14 | Open End Wrench | 1 | |
| | | | 98 00 17 | | 1 | |
| | | | 98 00 19 | | 1 | |
| | | | 98 20 25 | | 1 | |
| | | ⚡ 1000 V ⚡ ⚡ ⚡ ⚡ | 98 20 40 | Screwdrivers for slotted screws | 1 | |
| | | | 98 20 55 | | 1 | |
| | | | 98 20 65 | | 1 | |
| | | ⚡ 1000 V ⚡ ⚡ | 98 52 | Cable Knife | 1 | |

Universal Tool Case

48 parts
with insulated tools for works on electrical installations
IEC 60900 DIN EN 60900

98
9

98 99 14

- > hard-wearing case made of ABS material, red; containing a range of KNIPEX tools for works on electrical installations, tested according to DIN EN/IEC 60900, as well as insulating mats, clamps and gloves for added protection
- > sturdy aluminium frame with D-shape rings for belt and fix, sturdy centre board with multi-purpose push-in facilities by elastic loops and 12 small pockets
- > comfortable handle and mounting device for a "Trolley" embedded in the bottom (available ordering ref. 00 21 40 T)
- > metal hinges
- > 30 kg maximum load
- > can be opened on one or both sides; bottom tray and cover can be opened independently
- > stands stable in any opening position due to lid-holders and hinge mechanisms on both sides, that register in a position of 45° and 90°
- > 3-digit lock and two flip-locks for fixation of the cover
- > removable document compartment and removable tool board, with 13 push-in compartments on one side
- > two flip-locks to fix the bottom

- > base tray, height 58 mm, can be subdivided by flexible inserts; cover plate with six large push-in compartments, can be fixed by popper
- > dimensions, external (H x W x D): 255 x 490 x 410 mm
- > dimensions, internal (H x W x D) : (105 + 105) x 445 x 350 mm
































00 21 40 T

- > telescopic handle for rolling transport of tool case
- > applicable for cases: 00 21 40 LE Tool Case "BIG Twin", 98 99 14 Universal Tool Case
- > height adjustable handle with catch
- > integrated mechanism for fixation to the case, for rapid assembly and removal
- > with two smooth running rolls
- > dimensions: 60 x 245 x 400 (1.000) mm (extended)



98 99 14
⚡ 1000V




| Article No. | EAN 4003773- | | | | Quantity | g |
|--------------------|-----------------|---|-----------|--|----------|-------|
| 98 99 14 | 026655 | Universal Tool Case 48 parts | | | | 16250 |
| | | ⚡ 1000V   | 03 07 200 | Combination Pliers | 1 | |
| | | ⚡ 1000V   | 11 17 160 | Insulation Stripper | 1 | |
| | | ⚡ 1000V   | 70 07 160 | Diagonal Cutter | 1 | |
| | | ⚡ 1000V    | 88 07 250 | KNIPLEX Alligator®, Water Pump Pliers | 1 | |
| | | ⚡ 1000V    | 95 17 200 | Cable Shears, with twin cutting edge | 1 | |
| | | | 98 00 10 | Open End Wrench | 1 | |
| | | | 98 00 13 | | 1 | |
| | | | 98 00 14 | | 1 | |
| | | | 98 00 17 | | 1 | |
| | | | 98 00 19 | | 1 | |
| | | ⚡ 1000V  | 98 00 22 | Box Wrench | 1 | |
| | | | 98 01 10 | | 1 | |
| | | | 98 01 13 | | 1 | |
| | | | 98 01 14 | | 1 | |
| | | | 98 01 17 | | 1 | |
| | | | 98 01 19 | | 1 | |
| | | | 98 01 22 | 1 | | |
| | | ⚡ 1000V   | 98 67 05 | Insulating Mat, from rubber | 3 | |
| | | ⚡ 1000V    | 98 20 25 | Screwdrivers for slotted screws | 1 | |
| | | | 98 20 40 | | 1 | |
| | | | 98 20 55 | | 1 | |
| | | | 98 20 65 | | 1 | |
| | | ⚡ 1000V    | 98 24 01 | Screwdriver for cross recessed screws, Phillips® | 1 | |
| | | | 98 24 02 | | 1 | |
| | | ⚡ 1000V  | 98 40 | T-Handle Drive, with driving square 1/2" | 1 | |
| | | ⚡ 1000V  | 98 42 | Reversible Ratchet, with driving square 1/2" | 1 | |
| | | ⚡ 1000V   | 98 45 125 | Extension Bar, with internal/external square 1/2" | 1 | |
| | | | 98 45 250 | | 1 | |
| | | | 98 47 10 | Hexagon Socket for hexagonal screws, with internal square 1/2" | 1 | |
| | | | 98 47 11 | | 1 | |
| | | | 98 47 12 | | 1 | |
| | | | 98 47 13 | | 1 | |
| | | ⚡ 1000V   | 98 47 14 | | 1 | |
| | | | 98 47 17 | | 1 | |
| | | | 98 47 19 | | 1 | |
| | | | 98 47 22 | | 1 | |
| | | | 98 47 24 | 1 | | |
| | | ⚡ 1000V   | 98 52 | Cable Knife | 1 | |
| | | | 98 53 03 | Dismantling Knife for round cables | 1 | |
| | | ⚡ 1000V   | 98 64 02 | Insulating Clamp, from plastic | 6 | |
| | | ⚡ 1000V | 98 65 40 | Electricians' Gloves | 1 | |
| 98 99 14 LE | 060703 | | | Universal Tool Case empty | | 8235 |
| 00 21 40 T | 062981 | | | Trolley for rolling case transport | | 1200 |

Electronics Pliers and Precision Tweezers



| | |
|---|-----|
| Electronic <i>Super Knips</i> ® / ESD | 234 |
| Precision Electronics Diagonal Cutters / ESD | 236 |
| Electronics Diagonal Cutters / ESD | 238 |
| Electronics Diagonal Cutters with carbide metal cutting edges | 241 |
| Electronics End Cutting Nippers / ESD | 242 |
| Electronics Oblique Cutting Nipper | 243 |
| Precision Electronics Gripping Pliers / ESD | 244 |
| – with precision laser cut cross-shaping | 244 |
| Electronics Pliers / ESD | 245 |
| Electronics Mounting Pliers | 247 |
| Electronics Pliers Sets | 248 |
| Precision Tweezers | 249 |

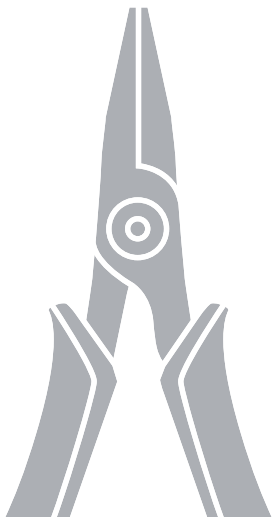

Electronic Super Knips®

DIN ISO 9654

78

- > precision pliers for ultra fine cutting work, e. g. in electronics and fine mechanics
- > ground, very sharp cutting edges without bevel
- > precision shaped tips cut wires resting on a board from 0.2 mm dia.
- > joint with stainless steel rivet
- > cutting edges additionally induction hardened
- > extremely smooth movement for minimum operator fatigue
- > with opening spring and opening limiter
- > in INOX or special tool steel

78 03 125/ESD / 78 23 125

INOX - stainless steel; cutting edge hardness approx. 54 HRC

78 13 125/ESD

INOX - stainless steel; cutting edge hardness approx. 54 HRC; with lead catcher – no uncontrolled loss of cut wire ends

78 31 125

cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC; with narrow head; special tool steel, polished

78 41 125

cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC; with narrow head; with lead catcher – no uncontrolled loss of cut wire ends; special tool steel, polished

78 61 125/ESD

cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC; also suitable for cutting glass fibre cables (fibre optics)

78 71 125/ESD

special tool steel, polished; with lead catcher – no uncontrolled loss of cut wire ends; cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC



78 03 125
✳️ ▲ ▲ ▲




78 03 125 ESD
⚡ ✳️ ▲ ▲ ▲



78 13 125
✳️ ▲ ▲ ▲ ▶



78 23 125
✳️ ∠60° ▲ ▲ ▲



78 31 125
✳️ ▲ ▲ ▲



78 41 125
✳️ ▲ ▲ ▲ ▶

Models also for hard wire

78 81 125

precision ground cutting edges with very small bevel suitable also for hard wire; special tool steel, polished; cutting-edge hardness approx. 64 HRC

78 91 125

precision ground cutting edges with very small bevel suitable also for hard wire; with lead catcher – no uncontrolled loss of cut wire ends; special tool steel, polished; cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC



78 61 125
✳️ ▲ ▲ ▲



78 71 125
✳️ ▲ ▲ ▲ ▶

ESD pliers (electrostatic discharge)


Electrostatic energy is discharged through the handles in a gradual and controlled manner which protects components endangered by electrostatic discharge in accordance with applicable standards, e.g. IEC TR 61 340-5, DIN EN 61 340-5, SP Method 2472



78 81 125
✳️ ▲ ▲ ▲



78 91 125
✳️ ▲ ▲ ▲ ▶

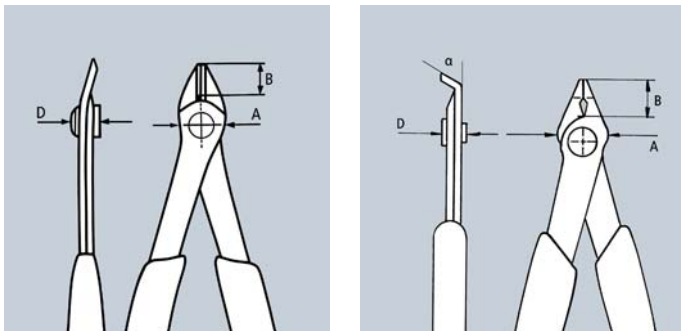

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | | Dimensions | | | ⚖ g |
|----------------------|-----------------|---------|------------------------------------|-----------|----------|----------------------------|--------------------|------|------|------------|---------|---------|--------|
| | | | | | | | Ø mm | Ø mm | Ø mm | B mm | A mm | D mm | |
| 78 03 125 | 035381 | 125 | ✳️ 🔴 🔴 🔴 | | polished | with multi-component grips | 0.2 - 1.6 | 1.0 | | 9.0 | 13.5 | 7.5 | 56 |
| 78 03 125 ESD | 025146 | 125 | ⚡ ✳️ 🔴 🔴 🔴 | | polished | with multi-component grips | 0.2 - 1.6 | 1.0 | | 9.0 | 13.5 | 7.5 | 55 |
| 78 13 125 | 035398 | 125 | ✳️ 🔴 🔴 🔴 ➤ | | polished | with multi-component grips | 0.2 - 1.6 | 1.0 | | 9.0 | 13.5 | 7.5 | 57 |
| 78 13 125 ESD | 025153 | 125 | ⚡ ✳️ 🔴 🔴 🔴 ➤ | | polished | with multi-component grips | 0.2 - 1.6 | 1.0 | | 9.0 | 13.5 | 7.5 | 57 |
| 78 23 125 | 043096 | 125 | ✳️ $\le 60^\circ$ 🔴 🔴 🔴 | | polished | with multi-component grips | 0.2 - 1.0 | 0.6 | | 5.5 | 13.5 | 7.5 | 55 |
| 78 31 125 | 039778 | 125 | ✳️ 🔴 🔴 🔴 | burnished | polished | with multi-component grips | 0.2 - 1.0 | | | 9.0 | 12.5 | 7.5 | 55 |
| 78 41 125 | 040767 | 125 | ✳️ 🔴 🔴 🔴 ➤ | burnished | polished | with multi-component grips | 0.2 - 1.0 | | | 9.0 | 12.5 | 7.5 | 57 |
| 78 61 125 | 035404 | 125 | ✳️ 🔴 🔴 🔴 | burnished | polished | with multi-component grips | 0.2 - 1.6 | 1.2 | | 9.0 | 13.5 | 7.5 | 56 |
| 78 61 125 ESD | 025184 | 125 | ⚡ ✳️ 🔴 🔴 🔴 | burnished | polished | with multi-component grips | 0.2 - 1.6 | 1.2 | | 9.0 | 13.5 | 7.5 | 56 |
| 78 71 125 | 043799 | 125 | ✳️ 🔴 🔴 🔴 ➤ | burnished | polished | with multi-component grips | 0.2 - 1.6 | 1.2 | | 9.0 | 13.5 | 7.5 | 57 |
| 78 71 125 ESD | 025191 | 125 | ⚡ ✳️ 🔴 🔴 🔴 ➤ | burnished | polished | with multi-component grips | 0.2 - 1.6 | 1.2 | | 9.0 | 13.5 | 7.5 | 57 |
| 78 81 125 | 065074 | 125 | ✳️ 🔵 🔵 🔴 | burnished | polished | with multi-component grips | 0.2 - 1.6 | 1.2 | 0.6 | 9.0 | 13.5 | 7.5 | 57 |
| 78 91 125 | 065081 | 125 | ✳️ 🔵 🔵 🔴 ➤ | burnished | polished | with multi-component grips | 0.2 - 1.6 | 1.2 | 0.6 | 9.0 | 13.5 | 7.5 | 57 |

Precision Electronics Diagonal Cutters

DIN ISO 5746

79

- > precision pliers for ultra fine cutting work, e. g. in electronics and fine mechanics
- > very precisely ground and sharp cutting edges with very small bevels for exact cutting on delicate electronic components; also available without bevel for flush cutting
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > approx. 20% lighter than conventional electronics pliers
- > bolted joint with particularly carefully manufactured joint surfaces for even, low-friction movement throughout the entire opening range
- > smooth-running double spring for a gentle and even opening
- > ergonomically optimised multi- component handles
- > Chrome vanadium ball-bearing steel, forged, multi stage oil-hardened

79 02 120
mini-head

79 02 125
round head

79 12 125
specially for cutting through hard wire and piano wire

79 32 125
pointed head


79 42 125 Z
for an optimised flush cutting result of soft materials

79 52 125
pointed head; with lead catcher – no uncontrolled loss of cut wire ends



Cut with 79 42 125 (without bevel)

Cut with 79 42 125 Z (flush cut)

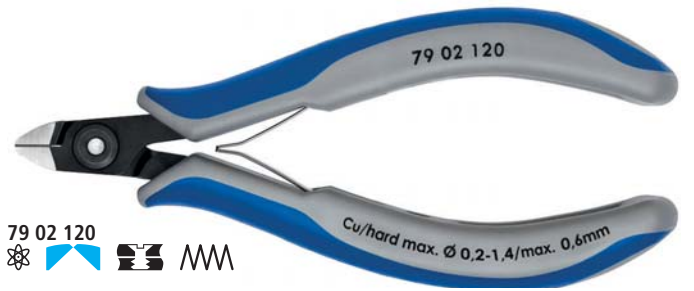

79 02 120
✳️



79 02 125
✳️



79 22 120
✳️



79 22 125
✳️



79 32 125
✳️



79 42 125 Z
✳️



79 42 125
✳️

The subtle difference

KNIPLEX precision electronics pliers are made of high-quality ball bearing steel and processed with the highest degree of care. Each opening movement is gentle and even without backlash. Each work step proceeds reliably and precisely. This makes work much easier for professionals.

- flush cut
- cutting edges without bevel
- cutting edges with very small bevel

| Article No. | EAN 4003773- | ↔ mm | | Pliers | Head | Handles | Cutting capacities | | | | Dimensions | | | ⚖ g |
|--------------------|--------------|------|--|-----------|----------|----------------------------|--------------------|------|------|------|------------|------|------|-----|
| | | | | | | | Ø mm | Ø mm | Ø mm | Ø mm | B mm | A mm | D mm | |
| 79 02 120 | 061403 | 120 | | burnished | polished | with multi-component grips | 0.2 - 1.4 | 1.0 | 0.6 | | 6.5 | 9.0 | 6.5 | 57 |
| 79 02 125 | 061281 | 125 | | burnished | polished | with multi-component grips | 0.2 - 1.7 | 1.3 | 0.7 | | 10.0 | 11.0 | 6.5 | 59 |
| 79 12 125 | 071365 | 125 | | burnished | polished | with multi-component grips | 0.3 - 1.7 | 1.3 | 1.0 | 0.6 | 10.0 | 11.0 | 6.5 | 59 |
| 79 22 120 | 061427 | 120 | | burnished | polished | with multi-component grips | 0.1 - 1.3 | 0.8 | | | 6.5 | 9.0 | 6.5 | 56 |
| 79 22 125 | 061342 | 125 | | burnished | polished | with multi-component grips | 0.1 - 1.7 | 1.0 | | | 10.0 | 11.0 | 6.5 | 60 |
| 79 32 125 | 061366 | 125 | | burnished | polished | with multi-component grips | 0.2 - 1.5 | 1.1 | 0.6 | | 11.0 | 11.0 | 6.5 | 58 |
| 79 42 125 | 061380 | 125 | | burnished | polished | with multi-component grips | 0.1 - 1.5 | 0.8 | | | 11.0 | 11.0 | 6.5 | 58 |
| 79 42 125 Z | 078449 | 125 | | burnished | polished | with multi-component grips | 0.1 - 1.3 | | | | 11.0 | 11.0 | 6.5 | 58 |
| 79 52 125 | 065135 | 125 | | burnished | polished | with multi-component grips | 0.2 - 1.3 | 0.9 | 0.5 | | 11.0 | 11.0 | 6.5 | 58 |
| 79 62 125 | 065142 | 125 | | burnished | polished | with multi-component grips | 0.1 - 1.3 | 0.8 | | | 11.0 | 11.0 | 6.5 | 58 |

Precision Electronics Diagonal Cutters ESD

DIN ISO 9654

79

Electrically discharging handles – dissipative

779 02 120 ESD
mini-head

79 02 125 ESD
round head

79 12 125 ESD
specially for cutting through
hard wire and piano wire

79 22 120 ESD
mini-head

79 22 125 ESD
round head


79 32 125 ESD
pointed head

79 42 125 ESD
pointed head

79 42 125 Z ESD
for an optimised flush cutting result
of soft materials

79 52 125 ESD
pointed head with lead catcher – no
uncontrolled loss of cut wire ends

79 62 125 ESD
pointed head with lead catcher – no
uncontrolled loss of cut wire ends

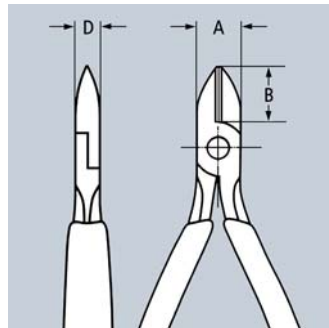

79 02 120 ESD
⚠️ ⚡️ ⚙️ ⚙️ ⚙️



79 02 125 ESD
⚠️ ⚡️ ⚙️ ⚙️ ⚙️



79 22 120 ESD
⚠️ ⚡️ ⚙️ ⚙️ ⚙️



79 22 125 ESD
⚠️ ⚡️ ⚙️ ⚙️ ⚙️



79 32 125 ESD
⚠️ ⚡️ ⚙️ ⚙️ ⚙️



79 42 125 ESD
⚠️ ⚡️ ⚙️ ⚙️ ⚙️



79 42 125 Z ESD
⚠️ ⚡️ ⚙️ ⚙️ ⚙️

ESD pliers (electrostatic discharge)

Electrostatic energy is discharged through the handles in a gradual and controlled manner which protects components endangered by electrostatic discharge in accordance with applicable standards, e.g. IEC TR 61 340-5, DIN EN 61 340-5, SP Method 2472



| Article No. | EAN 4003773- | ↔ mm | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | Pliers | Head | Handles | Cutting capacities | | | | Dimensions | | | ⚖️ g |
|------------------------|-----------------|---------|------------------|-----------|----------|----------------------------|--------------------|------|------|------|------------|---------|---------|---------|
| | | | | | | | Ø mm | Ø mm | Ø mm | Ø mm | B mm | A mm | D mm | |
| 79 02 120 ESD | 061595 | 120 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | burnished | polished | with multi-component grips | 0.2 - 1.4 | 1.0 | 0.6 | | 6.5 | 9.0 | 6.5 | 60 |
| 79 02 125 ESD | 061519 | 125 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | burnished | polished | with multi-component grips | 0.2 - 1.7 | 1.3 | 0.7 | | 10.0 | 11.0 | 6.5 | 61 |
| 79 12 125 ESD | 071389 | 125 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | burnished | polished | with multi-component grips | 0.3 - 1.7 | 1.3 | 1.0 | 0.6 | 10.0 | 11.0 | 6.5 | 61 |
| 79 22 120 ESD | 061618 | 120 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | burnished | polished | with multi-component grips | 0.1 - 1.3 | 0.8 | | | 6.5 | 9.0 | 6.5 | 61 |
| 79 22 125 ESD | 061533 | 125 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | burnished | polished | with multi-component grips | 0.1 - 1.7 | 1.0 | | | 10.0 | 11.0 | 6.5 | 61 |
| 79 32 125 ESD | 061557 | 125 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | burnished | polished | with multi-component grips | 0.2 - 1.5 | 1.1 | 0.6 | | 10.5 | 11.0 | 6.5 | 61 |
| 79 42 125 ESD | 061571 | 125 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | burnished | polished | with multi-component grips | 0.1 - 1.5 | 0.8 | | | 10.5 | 11.0 | 6.5 | 58 |
| 79 42 125 Z ESD | 078456 | 125 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ | burnished | polished | with multi-component grips | 0.1 - 1.3 | | | | 11.0 | 11.0 | 6.5 | 58 |
| 79 52 125 ESD | 065159 | 125 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ ➤ | burnished | polished | with multi-component grips | 0.2 - 1.3 | 0.9 | 0.5 | | 11.0 | 11.0 | 6.5 | 58 |
| 79 62 125 ESD | 065166 | 125 | ⚠️ ⚡️ ⚙️ ⚙️ ⚙️ ➤ | burnished | polished | with multi-component grips | 0.1 - 1.3 | 0.8 | | | 11.0 | 11.0 | 6.5 | 58 |

Electronics Diagonal Cutters

DIN ISO 9654

75

- > bolted joint for high precision and stress tolerance
- > for ultra fine cutting work, e.g. in electronics and fine mechanics
- > with sharp, ground cutting edges for soft and hard wire and piano wire
- > cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > low-friction double spring for gentle and even opening
- > High-grade special tool steel, forged, multi stage oil-hardened

Style 0

with bevel

Style 1


with bevel and lead catcher, no uncontrolled loss of cut wire ends

Style 2

with small bevel

Style 5

particularly narrow head, with bevel

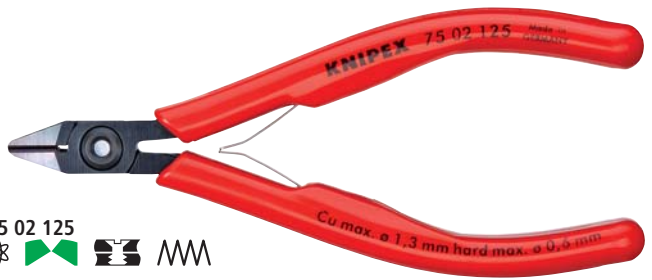

75 02 125




75 12 125

75 22 125



75 52 125

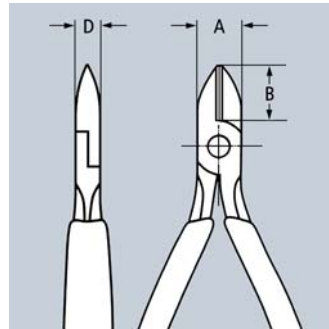

Bolted joint

| Article No. | EAN 4003773- | ↔ mm | | Style | Pliers | Handles | Cutting capacities | | | | Dimensions | | | g |
|-------------|--------------|------|--|-------|-----------|--------------------|--------------------|------|------|------|------------|------|------|----|
| | | | | | | | Ø mm | Ø mm | Ø mm | Ø mm | A mm | B mm | D mm | |
| 75 02 125 | 040491 | 125 | | 0 | burnished | with plastic grips | 0.2 - 1.3 | 1.0 | 0.6 | 0.4 | 10.5 | 14.0 | 6.5 | 81 |
| 75 12 125 | 040514 | 125 | | 1 | burnished | with plastic grips | 0.2 - 1.3 | 1.0 | 0.6 | 0.4 | 10.5 | 14.0 | 6.5 | 80 |
| 75 22 125 | 040538 | 125 | | 2 | burnished | with plastic grips | 0.2 - 1.3 | 0.9 | 0.4 | 0.3 | 10.5 | 14.0 | 6.5 | 79 |
| 75 52 125 | 040576 | 125 | | 5 | burnished | with plastic grips | 0.2 - 0.8 | 0.5 | 0.3 | | 10.5 | 14.0 | 6.5 | 79 |

Electronics Diagonal Cutters

DIN ISO 9654

77

- > for fine cutting work, e.g. in electronics and fine mechanics
- > sturdy, zero-backlash box joint
- > low-friction double spring for gentle and even opening
- > the polish or mirror polish (only finish 2) together with a fine film of oil offer effective rust protection – no circuit faults caused by peeling chrome from plated tools
- > cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened

77 01 115 / 77 02 130

round head, with bevel

77 02 115 / 77 22 130

round head, with small bevel

77 11 115 / 77 12 115round head, with bevel and lead catcher
– no uncontrolled loss of cut wire ends**77 21 115**

pointed head, without bevel

77 21 130

round head, without bevel

77 22 115

round head, without bevel; cutting edge hardness approx. 57 HRC

77 32 115

pointed head, with small bevel

77 42 115 / 77 42 130

pointed head, without bevel; cutting edge hardness approx. 57 HRC

77 52 115pointed, flat head, with small bevel;
cutting edge hardness approx. 57 HRC**77 72 115**

pointed mini-head, with small bevel

**77 01 115****77 02 115****77 12 115****77 22 115****77 32 115****77 42 115****77 52 115****77 72 115**

| Article No. | EAN 4003773- | ↔ mm | Icon | Head | Handles | Cutting capacities | | | Dimensions | | | |
|------------------|--------------|------|------|-----------------|----------------------------|--------------------|------|------|------------|------|------|-----|
| | | | | | | Ø mm | Ø mm | Ø mm | B mm | A mm | D mm | g |
| 77 01 115 | 018568 | 115 | | mirror polished | plastic coated | 0.3 - 1.6 | 1.2 | 0.6 | 14.0 | 11.0 | 7.5 | 67 |
| 77 01 130 | 018575 | 130 | | mirror polished | plastic coated | 0.3 - 2.0 | 1.5 | 0.8 | 18.0 | 15.0 | 9.5 | 108 |
| 77 02 115 | 039334 | 115 | | mirror polished | with multi-component grips | 0.3 - 1.6 | 1.2 | 0.6 | 14.0 | 11.0 | 7.5 | 80 |
| 77 02 130 | 039341 | 130 | | mirror polished | with multi-component grips | 0.3 - 2.0 | 1.5 | 0.8 | 18.0 | 15.0 | 9.5 | 124 |
| 77 11 115 | 018629 | 115 | | mirror polished | plastic coated | 0.3 - 1.6 | 1.2 | 0.6 | 14.0 | 11.0 | 7.5 | 70 |
| 77 12 115 | 043768 | 115 | | mirror polished | with multi-component grips | 0.3 - 1.6 | 1.2 | 0.6 | 14.0 | 11.0 | 7.5 | 80 |
| 77 21 115 | 018650 | 115 | | mirror polished | plastic coated | 0.3 - 1.3 | 1.0 | | 14.0 | 11.0 | 7.5 | 64 |
| 77 21 130 | 018667 | 130 | | mirror polished | plastic coated | 0.3 - 1.6 | 1.3 | | 18.0 | 14.0 | 9.5 | 110 |
| 77 22 115 | 043782 | 115 | | mirror polished | with multi-component grips | 0.3 - 1.3 | 1.0 | | 14.0 | 11.0 | 7.0 | 80 |
| 77 22 130 | 040446 | 130 | | mirror polished | with multi-component grips | 0.3 - 2.0 | 1.5 | | 18.0 | 15.0 | 9.0 | 124 |
| 77 32 115 | 044307 | 115 | | mirror polished | with multi-component grips | 0.3 - 1.3 | 1.0 | 0.5 | 14.0 | 11.0 | 7.5 | 80 |
| 77 42 115 | 039761 | 115 | | mirror polished | with multi-component grips | 0.3 - 1.3 | 0.8 | | 14.0 | 11.0 | 7.5 | 80 |
| 77 42 130 | 018773 | 130 | | mirror polished | with multi-component grips | 0.3 - 1.6 | 1.3 | | 18.0 | 15.0 | 9.5 | 122 |
| 77 52 115 | 040750 | 115 | | mirror polished | with multi-component grips | 0.3 - 1.0 | 0.8 | 0.5 | 14.0 | 11.0 | 7.5 | 77 |
| 77 72 115 | 040958 | 115 | | mirror polished | with multi-component grips | 0.3 - 0.8 | | | 10.5 | 9.5 | 6.0 | 69 |

Electronics Diagonal Cutters ESD

DIN ISO 9654

77

- > for fine cutting work, e.g. in electronics and fine mechanics
- > electrically discharging handles – dissipative
- > sturdy, zero-backlash box joint
- > low-friction double spring for gentle and even opening
- > the mirror polish together with a fine film of oil offer effective rust protection – no circuit faults caused by peeling chrome from plated tools
- > cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC
- > with two-colour dual component grips, black/grey
- > High-grade special tool steel, forged, multi stage oil-hardened

77 02 115 ESD
round head, with small bevel

77 12 115 ESD
round head, with bevel and lead catcher - no uncontrolled loss of cut wire ends



77 22 115 ESD
round head, without bevel

77 32 115 ESD
pointed head, with small bevel

77 42 115 ESD
pointed head, without bevel

77 52 115 ESD
pointed, flat head, with small bevel

77 72 115 ESD
pointed mini-head, with small bevel

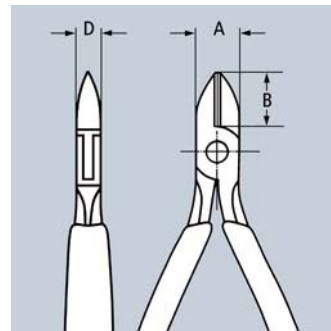

77 02 115 ESD
⚠ ⚡ ⚡ ⚡ ⚡ ⚡



77 12 115 ESD
⚠ ⚡ ⚡ ⚡ ⚡ ⚡



77 22 115 ESD
⚠ ⚡ ⚡ ⚡ ⚡ ⚡



77 32 115 ESD
⚠ ⚡ ⚡ ⚡ ⚡ ⚡



77 42 115 ESD
⚠ ⚡ ⚡ ⚡ ⚡ ⚡



77 52 115 ESD
⚠ ⚡ ⚡ ⚡ ⚡ ⚡



77 72 115 ESD
⚠ ⚡ ⚡ ⚡ ⚡ ⚡

ESD pliers (electrostatic discharge)

Electrostatic energy is discharged through the handles in a gradual and controlled manner which protects components endangered by electrostatic discharge in accordance with applicable standards, e.g. IEC TR 61 340-5, DIN EN 61 340-5, SP Method 2472



| Article No. | EAN 4003773- | ↔ mm | Head | Handles | Cutting capacities | | | Dimensions | | | ⚖ g |
|----------------------|--------------|------|-----------------|----------------------------|--------------------|------|------|------------|------|------|-----|
| | | | | | Ø mm | Ø mm | Ø mm | B mm | A mm | D mm | |
| 77 02 115 ESD | 025092 | 115 | mirror polished | with multi-component grips | 0.3 - 1.6 | 1.2 | 0.6 | 14.0 | 11.0 | 7.5 | 82 |
| 77 12 115 ESD | 025108 | 115 | mirror polished | with multi-component grips | 0.3 - 1.6 | 1.2 | 0.6 | 14.0 | 11.0 | 7.5 | 80 |
| 77 22 115 ESD | 025115 | 115 | mirror polished | with multi-component grips | 0.3 - 1.3 | 1.0 | | 14.0 | 11.0 | 7.5 | 80 |
| 77 32 115 ESD | 025122 | 115 | mirror polished | with multi-component grips | 0.3 - 1.3 | 1.0 | 0.5 | 14.0 | 11.0 | 7.0 | 79 |
| 77 42 115 ESD | 031901 | 115 | mirror polished | with multi-component grips | 0.3 - 1.3 | 0.8 | | 14.0 | 11.0 | 7.0 | 78 |
| 77 52 115 ESD | 025139 | 115 | mirror polished | with multi-component grips | 0.3 - 1.0 | 0.8 | 0.5 | 11.5 | 14.0 | 7.0 | 79 |
| 77 72 115 ESD | 024330 | 115 | mirror polished | with multi-component grips | 0.3 - 0.8 | | | 10.5 | 9.5 | 6.0 | 69 |

Electronics Diagonal Cutters

with inserted carbide metal cutting edges

DIN ISO 9654

77
H

- > for extreme demands on cutting pliers caused by hard or tough materials, e.g. piano, nickel, tungsten and diode wire, such as those used more frequently in the electronics and aerospace industries
- > always the right cutting tool, even with the hardest material
- > precision carbide metal cutting edges soldered into forged blanks
- > sturdy, zero-backlash box joint
- > hardness of the carbide cutting edges 80 - 83 HRC
- > pliers with carbide metal cutting edges have a substantially longer service life than such with conventional cutting edges
- > constantly reliable cutting results due to the avoidance of cutter deformations
- > high cost saving due to longer service life of the pliers

77 02 120 H / 77 02 135 H / ESD

round head, with bevel

77 32 120 H / ESD

pointed head with chamfer,
with small bevel




77 02 120 H
✳️ 🟢 🟢 📏 📏



77 02 135 H
✳️ 🟢 🟢 📏 📏



77 32 120 H ESD
⚠️ ✳️ 🟡 🟡 📏 📏

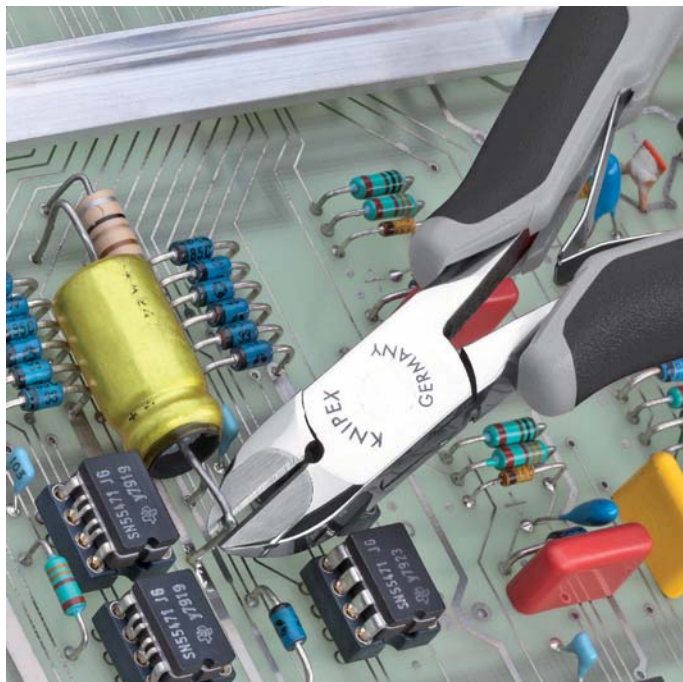

| Article No. | EAN 4003773- | ↔ mm | ✳️ 🟢 🟢 📏 📏 | Head | Handles | Cutting capacities | | | | Dimensions | | | |
|-----------------|-----------------|---------|---------------|-----------------|----------------------------|--------------------|------|------|------|------------|------|------|------|
| | | | | | | Ø mm | Ø mm | Ø mm | Ø mm | B mm | A mm | D mm | ⚖️ g |
| 77 02 120 H | 075783 | 120 | ✳️ 🟢 🟢 📏 📏 | mirror polished | with multi-component grips | 2.0 | 1.4 | 1.0 | 0.6 | 14 | 11 | 7.5 | 85 |
| 77 02 120 H ESD | 075813 | 120 | ⚠️ ✳️ 🟢 🟢 📏 📏 | mirror polished | with multi-component grips | 2.0 | 1.4 | 1.0 | 0.6 | 14 | 11 | 7.5 | 85 |
| 77 02 135 H | 075806 | 135 | ✳️ 🟢 🟢 📏 📏 | mirror polished | with multi-component grips | 2.2 | 1.6 | 1.2 | 0.8 | 18 | 15 | 9.5 | 115 |
| 77 02 135 H ESD | 075837 | 135 | ⚠️ ✳️ 🟢 🟢 📏 📏 | mirror polished | with multi-component grips | 2.2 | 1.6 | 1.2 | 0.8 | 18 | 15 | 9.5 | 115 |
| 77 32 120 H | 075790 | 120 | ✳️ 🟡 🟡 📏 📏 | mirror polished | with multi-component grips | 1.6 | 1.0 | 0.6 | 0.2 | 14 | 11 | 7.5 | 80 |
| 77 32 120 H ESD | 075820 | 120 | ⚠️ ✳️ 🟡 🟡 📏 📏 | mirror polished | with multi-component grips | 1.6 | 1.0 | 0.6 | 0.2 | 14 | 11 | 7 | 80 |

Electronics End Cutting Nippers


DIN ISO 5746

64


- > precision pliers for ultra fine cutting work, e. g. in electronics and fine mechanics
- > sturdy, zero backlash box joint
- > low-friction double spring for gentle and even opening
- > the polish or mirror polish (only finish 2) together with a fine film of oil offer effective rust protection – no circuit faults caused by peeling chrome from plated tools
- > cutting edges additionally induction hardened, cutting edge hardness at least 56 HRC
- > High-grade special tool steel, forged, multi stage oil-hardened

- Style 0**
End Cutter, with bevel
- Style 2**
End Cutter, mini-blade with small bevel
- Style 3**
Oblique End Cutter, short head, with small bevel, $\alpha = 15^\circ$
- Style 4**
Oblique End Cutter, short head, with small bevel, $\alpha = 27^\circ$
- Style 5**
Oblique End Cutter, short head, without bevel, for flush cutting, $\alpha = 27^\circ$


- Style 6**
Oblique End Cutter, mini-blade with small bevel, $\alpha = 65^\circ$
- Style 7**
Oblique End Cutter, mini-blade with small bevel, head with recess, $\alpha = 35^\circ$
- Style 1 / 64 11 115**
End Cutter, without bevel
- Style 1 / 64 12 115 / ESD**
End Cutter, with small bevel

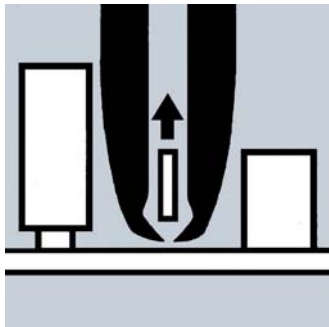


64 22 115

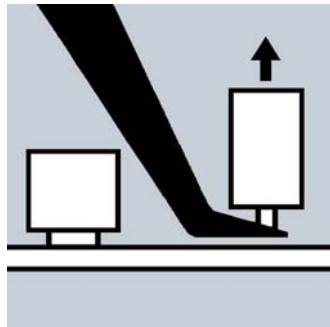

64 62 120

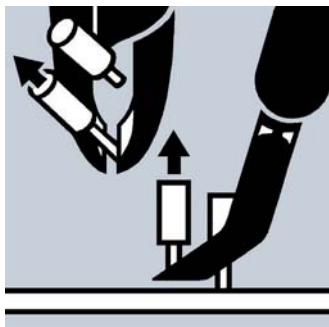

64 72 120

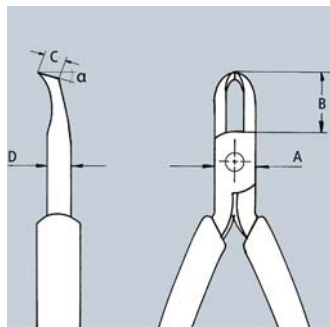

64 72 120



64 02 115



64 12 115 ESD



64 12 115



64 22 115



64 32 120



64 42 115




64 52 115




64 62 120




64 72 120

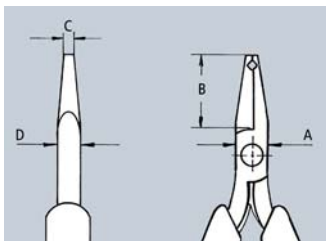


64 22 115

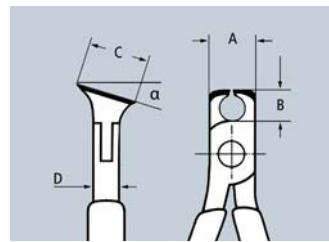

64 32/42/52

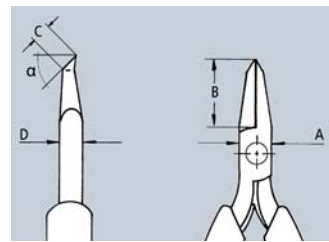

64 62 120

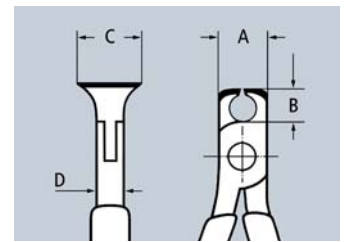

64 01/02/11/12

| Article No. | EAN 4003773- | ↔ mm | | Style | Head | Handles | Cutting capacities | | | Dimensions | | | | g |
|---------------|-----------------|---------|------|-------|-----------------|----------------------------|--------------------|------|------|------------|------|------|------|----|
| | | | | | | | Ø mm | Ø mm | Ø mm | A mm | B mm | D mm | C mm | |
| 64 01 115 | 017745 | 115 | ∠90° | 0 | mirror polished | plastic coated | 2.0 | 1.0 | 0.6 | 11.0 | 6.0 | 7.5 | 16.0 | 76 |
| 64 02 115 | 035343 | 115 | ∠90° | 0 | mirror polished | with multi-component grips | 2.0 | 1.0 | 0.6 | 11.0 | 6.0 | 7.5 | 16.0 | 94 |
| 64 11 115 | 017769 | 115 | ∠90° | 1 | mirror polished | plastic coated | 1.4 | 0.8 | | 11.0 | 6.0 | 7.0 | 16.0 | 74 |
| 64 12 115 | 040743 | 115 | ∠90° | 1 | mirror polished | with multi-component grips | 2.0 | 0.8 | 0.5 | 11.0 | 6.0 | 7.0 | 16.0 | 91 |
| 64 12 115 ESD | 024323 | 115 | ∠90° | 1 | mirror polished | with multi-component grips | 2.0 | 0.8 | 0.5 | 11.0 | 6.0 | 7.0 | 16.0 | 94 |
| 64 22 115 | 017806 | 115 | ∠90° | 2 | mirror polished | with multi-component grips | 0.8 | | | 10.0 | 20.0 | 6.0 | 3.0 | 65 |
| 64 32 120 | 017820 | 120 | ∠15° | 3 | mirror polished | with multi-component grips | 1.5 | 1.0 | 0.5 | 11.0 | 10.0 | 7.0 | 17.0 | 92 |
| 64 32 120 ESD | 025078 | 120 | ∠15° | 3 | mirror polished | with multi-component grips | 1.5 | 1.0 | 0.5 | 11.0 | 10.0 | 7.0 | 17.0 | 92 |
| 64 42 115 | 017844 | 115 | ∠27° | 4 | mirror polished | with multi-component grips | 1.5 | 1.0 | 0.5 | 10.5 | 10.0 | 7.0 | 12.0 | 69 |
| 64 52 115 | 040439 | 115 | ∠27° | 5 | mirror polished | with multi-component grips | 1.3 | | | 10.5 | 10.0 | 7.0 | 12.0 | 69 |
| 64 62 120 | 046998 | 120 | ∠65° | 6 | mirror polished | with multi-component grips | 0.6 | | | 9.5 | 18.5 | 6.0 | 5.0 | 70 |
| 64 62 120 ESD | 025085 | 120 | ∠65° | 6 | mirror polished | with multi-component grips | 0.6 | | | 9.5 | 18.5 | 6.0 | 5.0 | 70 |
| 64 72 120 | 017882 | 120 | ∠35° | 7 | mirror polished | with multi-component grips | 1.5 | | | 12.0 | 19.5 | 7.0 | 5.0 | 95 |

Electronics Oblique Cutting Nipper


DIN ISO 9654

62
12

- > with cutting edges for soft and medium hard wire without bevel, for flush cutting
- > cutting edges additionally induction hardened, cutting edge hardness approx. 58 HRC
- > low-friction double spring for gentle and even opening
- > sturdy, zero backlash box joint
- > the polish together with a fine film of oil offer effective rust protection – no circuit faults caused by peeling chrome from plated tools
- > High-grade special tool steel, forged, multi stage oil-hardened



62 12 120
∠15°

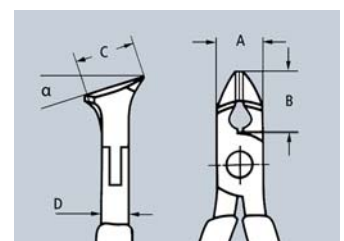


| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Cutting capacities | | | Dimensions | | | | g |
|-------------|-----------------|---------|------|----------|----------------------------|--------------------|------|--|------------|------|------|------|----|
| | | | | | | Ø mm | Ø mm | | A mm | B mm | D mm | C mm | |
| 62 12 120 | 048008 | 120 | ∠15° | polished | with multi-component grips | 0.3 - 1.0 | 0.7 | | 11 | 10 | 7.5 | 17 | 93 |

Electronics Pliers

DIN ISO 9655

35

- > precision pliers for fine assembly work, e.g. in electronics and fine mechanics
- > for gripping, holding and bending
- > sturdy, zero backlash box joint
- > smooth ground gripping surfaces
- > edges carefully deburred
- > low-friction double spring for gentle and even opening
- > the polish or mirror polish (only finish 2) together with a fine film of oil offer effective rust protection – no circuit faults caused by peeling chrome from plated tools
- > Special tool steel, forged, oil-hardened

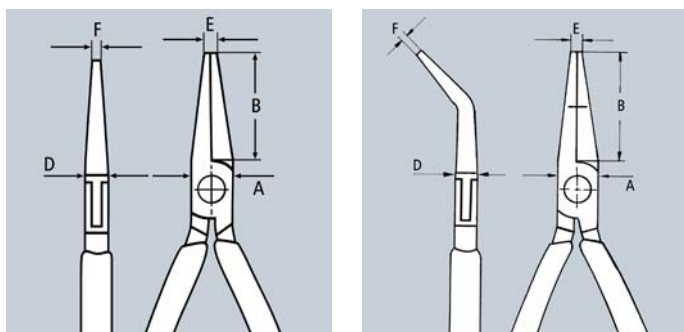35 11 115
✳️ 35 22 115
✳️ 35 32 115
✳️ 8 35 42 115
✳️ $\angle 45^\circ$ 35 52 145
✳️ 35 62 145
✳️ 35 72 145
✳️ 8 35 82 145
✳️ $\angle 45^\circ$


| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Dimensions | | | | | |
|-------------|--------------|------|--|-----------------|----------------------------|------------|------|------|------|------|-----|
| | | | | | | B mm | A mm | D mm | E mm | F mm | |
| 35 11 115 | 016694 | 115 | | mirror polished | plastic coated | 22.5 | 9.5 | 6.5 | 2.0 | 4.0 | 61 |
| 35 12 115 | 035107 | 115 | | mirror polished | with multi-component grips | 22.5 | 9.5 | 6.5 | 2.0 | 4.0 | 72 |
| 35 21 115 | 016724 | 115 | | mirror polished | plastic coated | 22.5 | 9.5 | 6.5 | 2.0 | 1.5 | 59 |
| 35 22 115 | 035114 | 115 | | mirror polished | with multi-component grips | 22.5 | 9.5 | 6.5 | 2.0 | 1.5 | 73 |
| 35 31 115 | 016762 | 115 | | mirror polished | plastic coated | 22.5 | 9.5 | 6.5 | 2.0 | 1.0 | 58 |
| 35 32 115 | 035121 | 115 | | mirror polished | with multi-component grips | 22.5 | 9.5 | 6.5 | 2.0 | 1.0 | 72 |
| 35 42 115 | 040736 | 115 | | mirror polished | with multi-component grips | 22.5 | 9.5 | 6.5 | 2.0 | 1.5 | 74 |
| 35 52 145 | 039389 | 145 | | mirror polished | with multi-component grips | 40.0 | 12.0 | 7.5 | 1.5 | 4.0 | 102 |
| 35 62 145 | 039556 | 145 | | mirror polished | with multi-component grips | 40.0 | 12.0 | 7.5 | 2.5 | 1.5 | 103 |
| 35 72 145 | 043607 | 145 | | mirror polished | with multi-component grips | 40.0 | 12.0 | 7.5 | 2.5 | 1.3 | 98 |
| 35 82 145 | 039396 | 145 | | mirror polished | with multi-component grips | 35.0 | 12.0 | 7.5 | 2.5 | 1.0 | 102 |

Electronics Pliers ESD

DIN ISO 9655

35

- > precision pliers for fine assembly work, e.g. in electronics and fine mechanics
- > for gripping, holding and bending
- > electrically discharging handles – dissipative
- > sturdy, zero backlash box joint
- > smooth ground gripping surfaces
- > edges carefully deburred
- > low-friction double spring for gentle and even opening
- > the mirror polish together with a fine film of oil offer effective rust protection – no circuit faults caused by peeling chrome from plated tools
- > with two-colour dual component grips, black/grey
- > Special tool steel, forged, oil-hardened

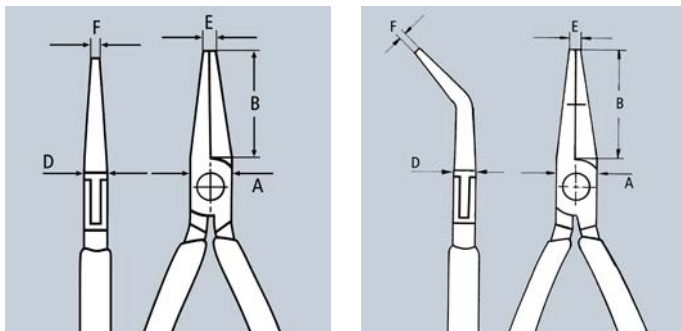

35 12 115 ESD



35 22 115 ESD



35 32 115 ESD



35 42 115 ESD

ESD pliers (electrostatic discharge)

Electrostatic energy is discharged through the handles in a gradual and controlled manner which protects components endangered by electrostatic discharge in accordance with applicable standards, e.g. IEC TR 61 340-5, DIN EN 61 340-5, SP Method 2472






| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Dimensions | | | | | ⚖ g |
|---------------|--------------|------|--|-----------------|----------------------------|------------|------|------|------|------|-----|
| | | | | | | B mm | A mm | D mm | E mm | F mm | |
| 35 12 115 ESD | 024835 | 115 | | mirror polished | with multi-component grips | 22.5 | 9.5 | 6.5 | 2.0 | 4.0 | 74 |
| 35 22 115 ESD | 024842 | 115 | | mirror polished | with multi-component grips | 22.5 | 9.5 | 6.5 | 2.0 | 1.5 | 74 |
| 35 32 115 ESD | 024859 | 115 | | mirror polished | with multi-component grips | 22.5 | 9.5 | 6.5 | 2.0 | 1.0 | 70 |
| 35 42 115 ESD | 024866 | 115 | | mirror polished | with multi-component grips | 22.5 | 9.5 | 6.5 | 2.0 | 1.5 | 74 |

Electronics Mounting Pliers

DIN ISO 5743

36

- > precision pliers for very fine assembly and repair work in electronics
- > for bending and cutting off wire ends on components
- > sturdy, zero backlash box joint smooth ground gripping surfaces edges carefully deburred
- > low-friction double spring for gentle and even opening
- > the mirror polish together with a fine film of oil offer effective rust protection – no circuit faults caused by peeling chrome from plated tools
- > High-grade special tool steel, forged, oil-hardened

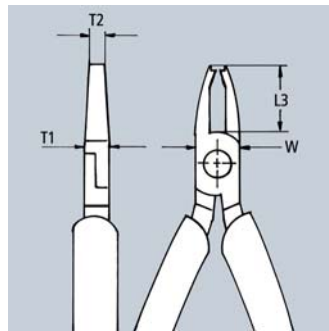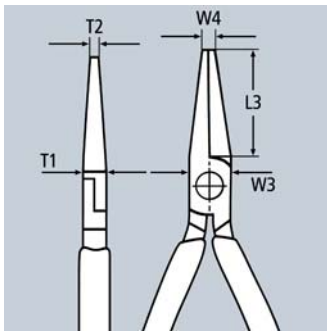


36 12 130




36 22 125




36 32 125



36 12 130
to bend wire in shape for the distance to the board



36 22 125
to bend and cut wire at 1.6 mm length below the board



36 32 125
to crunch and cut wire at 1.6 mm length below the board

| Article No. | EAN 4003773- | ↔ mm | | Head | Handles | Cutting capacities | | Dimensions | | | | | |
|-------------|-----------------|---------|--|-----------------|----------------------------|--------------------|----------|------------|---------|----------|----------|----------|-------|
| | | | | | | Ø mm | Ø mm | L3 mm | W mm | T1 mm | W1 mm | T2 mm | g |
| 36 12 130 | 016861 | 130 | | mirror polished | with multi-component grips | | | 23.0 | 12.0 | 9.5 | 5.5 | 6.0 | 94 |
| 36 22 125 | 046967 | 125 | | mirror polished | with multi-component grips | 1.2 | | 18.0 | 11.5 | 7.5 | 7.5 | 2.6 | 94 |
| 36 32 125 | 016885 | 125 | | mirror polished | with multi-component grips | 1.0 | | 18.0 | 11.5 | 7.5 | 7.5 | 4.0 | 108 |

Electronics Pliers Sets

for working on electronic components

00
20

00 20 16

7 parts, contains 6 electronics pliers and one pair of precision tweezers; case made of hard-wearing polyester fabric, pliers are held by elastic band, zippered

00 20 16 P

6 parts, contains 6 precision electronics pliers; case made of hard-wearing polyester fabric, pliers are held by elastic band, zippered

00 20 16 P ESD

6 parts, contains 6 ESD precision electronics pliers, electrically discharging version; case made of hard-wearing polyester fabric, pliers are held by elastic band, zippered

00 20 17

6 parts, contains 6 ESD electronics pliers, electrically discharging version; case made of hard-wearing polyester fabric, pliers are held by elastic band, zippered

00 20 18

8 parts, contains 2 electronics pliers and 6 electronics screwdrivers; practical storage box, shock-resistant plastic, with foam insert

00 20 18 ESD

8 parts, contains 2 electronics pliers and 6 electronics screwdrivers, ESD electrically discharging version; practical storage box, shock-resistant plastic, with foam insert



00 20 16



00 20 16 P



00 20 16 P ESD



00 20 17



00 20 18



00 20 18 ESD



| Article No. | EAN 4003773- | Contents | g |
|----------------|-----------------|--|-----|
| 00 20 16 | 022619 | 35 12 115 / 35 22 115 / 35 32 115 / 64 32 120 / 77 02 115 / 77 42 115 / 92 34 36 | 720 |
| 00 20 16 P | 063223 | 34 12 130 / 34 22 130 / 34 32 130 / 79 02 120 / 79 02 120 / 79 02 125 / 79 42 125 | 575 |
| 00 20 16 P ESD | 063230 | 34 12 130 ESD / 34 22 130 ESD / 34 32 130 ESD / 79 02 120 ESD / 79 02 125 ESD / 79 42 125 ESD | 585 |
| 00 20 17 | 031222 | 35 12 115 ESD / 35 22 115 ESD / 35 42 115 ESD / 64 32 120 ESD / 77 02 115 ESD / 77 32 115 ESD | 695 |
| 00 20 18 | 033073 | 35 22 115 / 77 02 115 / screwdrivers 0.4 x 2.5 / 0.5 x 3.0 / 0.6 x 3.5 / 0.8 x 4.0 / PH0 / PH1 | 460 |
| 00 20 18 ESD | 051848 | 35 22 115 ESD / 77 02 115 ESD / screwdrivers 0.4 x 2.5 / 0.5 x 3.0 / 0.6 x 3.5 / 0.8 x 4.0 / PH0 / PH1 | 465 |

Precision Tweezers

92

- > smooth gripping surfaces
- > non-reflective matt finish

92 02 53

for SMD-technology*; angled tips, width approx. 1 mm; gripping surfaces matt finish for optimum grip; Chrome nickel steel: stainless, anti-magnetic (18/10), very popular electronics quality

92 02 54

for SMD-technology*; angled tips, width approx. 1 mm; with integrated profile for reliable gripping of cylindrical components of 0.6 mm dia.; gripping surfaces matt finish for optimum grip; Chrome nickel steel: stainless, anti-magnetic (18/10), very popular electronics quality

92 02 55

gripping jaws 3.5 mm wide, for cylindrical components of 0.8 mm dia.; serrated handles; stainless, anti-magnetic and acid-proof

92 12 52

angled tips; extra strong tips; stainless, anti-magnetic



92 02 53
✳️ ∠45° ◁



92 02 54
✳️ ∠45° ◁



92 02 55
✳️ ◁



92 12 52
✳️ ∠85° ◁

| Article No. | EAN 4003773- | ↔ mm | | Finish | ⚖ g |
|-------------|--------------|------|-----------|--------------------------------------|-----|
| 92 02 53 | 054603 | 120 | ✳️ ∠45° ◁ | stainless, anti-magnetic | 16 |
| 92 02 54 | 054610 | 120 | ✳️ ∠45° ◁ | stainless, anti-magnetic | 15 |
| 92 02 55 | 054627 | 115 | ✳️ ◁ | stainless, anti-magnetic, acid-proof | 16 |
| 92 12 52 | 054658 | 120 | ✳️ ∠85° ◁ | stainless, anti-magnetic | 20 |

* SMD-Technology: technique for soldering surface mounted components on printed circuit boards without using holes

Precision Tweezers

pointed shape

92

- > for fine mounting work
- > straight pattern
- > smooth gripping surfaces
- > particularly slim tips

92 22 04

non-reflective matt finish; gripping surfaces matt finish for optimum grip; Chrome nickel steel: stainless, anti-magnetic (18/10), very popular electronics quality

92 22 06

non-reflective matt finish; gripping surfaces matt finish for optimum grip; Chrome nickel steel: stainless, anti-magnetic (18/10), very popular electronics quality

92 22 07

non-reflective matt finish; Chrome nickel steel; stainless, anti-magnetic and acid-proof

92 23 05

Titanium; electrically conductive; lightweight; non-reflective matt finish; stainless, anti-magnetic and acid-proof

92 24 01

Spring steel; mirror finish nickel plated and polished



92 22 04
✳️ ◁



92 22 06
✳️ ◁



92 22 07
✳️ ◁



92 23 05
✳️ ◁



92 24 01
✳️ ◁

| Article No. | EAN 4003773- | ↔ mm | | Finish | ⚖ g |
|-------------|--------------|------|------|--|-----|
| 92 22 04 | 054665 | 130 | ✳️ ◁ | stainless, anti-magnetic | 20 |
| 92 22 06 | 054672 | 120 | ✳️ ◁ | stainless, anti-magnetic | 15 |
| 92 22 07 | 054689 | 115 | ✳️ ◁ | stainless, anti-magnetic, acid-proof | 12 |
| 92 23 05 | 054726 | 120 | ✳️ ◁ | Titanium, anti-magnetic, acid-proof, stainless | 10 |
| 92 24 01 | 054733 | 120 | ✳️ ◁ | nickel plated | 15 |

Precision Tweezers
needle-pointed shape

92


- > for ultra fine mounting work
- > extra fine tips
- > smooth gripping surfaces
- > stainless, anti-magnetic
- > non-reflective matt finish

92 22 12
straight pattern

92 22 13
American shape, solid; straight pattern; stainless, anti-magnetic and acid-proof

92 32 29
sickle-shaped tips; Chrome nickel steel: stainless, anti-magnetic (18/10), very popular electronics quality; gripping surfaces matt finish for optimum grip

92 34 28
angled tips

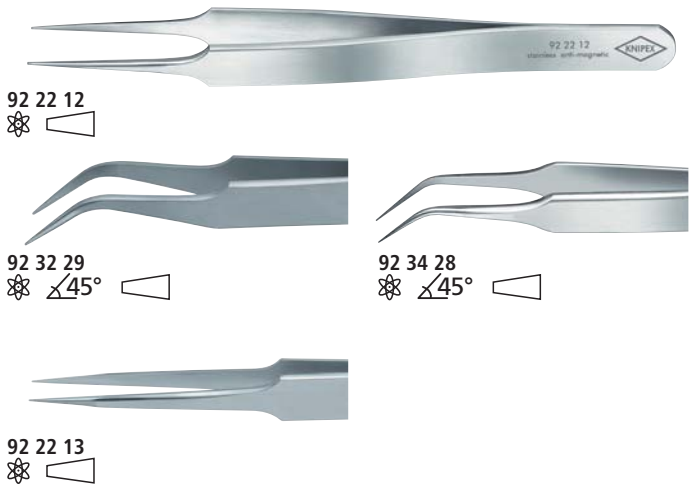

| Article No. | EAN 4003773- | ↔ mm | | Finish | g |
|-------------|--------------|------|--|--------------------------------------|----|
| 92 22 12 | 054696 | 105 | | stainless, anti-magnetic | 13 |
| 92 22 13 | 054702 | 135 | | stainless, anti-magnetic, acid-proof | 21 |
| 92 32 29 | 054818 | 120 | | stainless, anti-magnetic | 16 |
| 92 34 28 | 054825 | 105 | | stainless, anti-magnetic | 12 |

Precision Tweezers
with centering pin pointed shape

92


- > universally applicable
- > narrow tips
- > gripping surfaces with fine transverse serration
- > serrated handles

92 22 35
straight pattern; non-reflective matt finish; stainless, anti-magnetic and acid-proof

92 24 34
straight pattern; nickel plated

92 34 36
angled tips; nickel plated

92 34 37
angled tips; black non-reflective lacquered

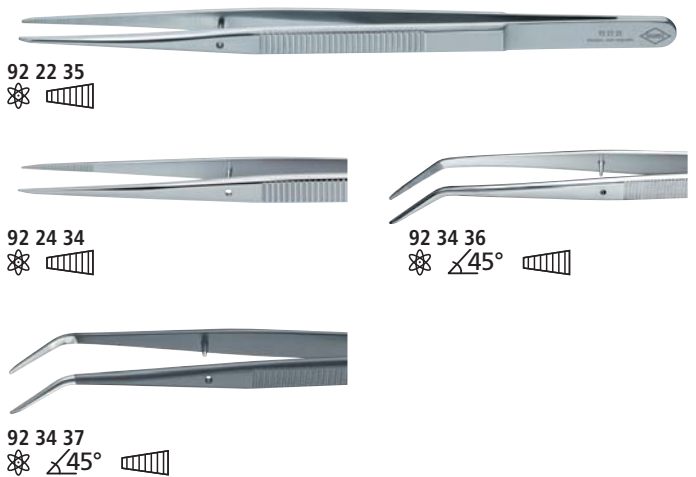

| Article No. | EAN 4003773- | ↔ mm | | Finish | g |
|-------------|--------------|------|--|--------------------------------------|----|
| 92 22 35 | 054719 | 155 | | stainless, anti-magnetic, acid-proof | 22 |
| 92 24 34 | 054740 | 155 | | nickel plated | 21 |
| 92 34 36 | 054832 | 155 | | nickel plated | 23 |
| 92 34 37 | 054849 | 155 | | black lacquered | 21 |

Precision Tweezers
round slim shape

92

- > round tips, approx. 2 mm wide
- > smooth gripping surfaces
- > stainless, anti-magnetic and acid-proof
- > Chrome nickel steel, stainless, anti-magnetic, acid-proof



| Article No. | EAN 4003773- | ↔ mm | | Finish | g |
|-------------|--------------|------|--|--------------------------------------|----|
| 92 52 23 | 054894 | 120 | | stainless, anti-magnetic, acid-proof | 17 |

Precision Tweezers

blunt shape

92

- > universally applicable
- > straight pattern
- > wide, round tips
- > serrated handles

92 44 42

jewellers' tweezers; round tips, approx. 2 mm wide; gripping jaws with fine crosswise serration (cross-hatched); nickel plated

92 64 43

round tips, approx. 3 mm wide; gripping surfaces with fine transverse serration; nickel plated

92 64 44

round tips, approx. 3.5 mm wide; gripping surfaces with fine transverse serration; nickel plated

92 70 46

round tips, approx. 3.5 mm wide; gripping surfaces with fine transverse serration; black non-reflective lacquered

92 72 45

round tips, approx. 3.5 mm wide; serrated gripping surfaces; nonreflective matt finish; stainless, anti-magnetic and acid-proof



92 44 42
✳️ 🧩



92 64 43
✳️ 📏



92 64 44
✳️ 📏



92 70 46
✳️ 📏



92 72 45
✳️ 📏

| Article No. | EAN 4003773- | ↔ mm | | Finish | ⚖ g |
|-------------|--------------|------|------|--------------------------------------|-----|
| 92 44 42 | 054887 | 140 | ✳️ 🧩 | nickel plated | 21 |
| 92 64 43 | 054917 | 120 | ✳️ 📏 | nickel plated | 17 |
| 92 64 44 | 054924 | 145 | ✳️ 📏 | nickel plated | 23 |
| 92 70 46 | 055075 | 145 | ✳️ 📏 | black lacquered | 26 |
| 92 72 45 | 054962 | 145 | ✳️ 📏 | stainless, anti-magnetic, acid-proof | 27 |

Plastic Tweezers

92

- > trapezoidal tips, approx. 3.5 mm wide
- > knurled gripping surfaces
- > serrated handles
- > tweezers body: solid plastic, temperature-resistant up to 130°C



92 69 84
✳️ 📏

| Article No. | EAN 4003773- | ↔ mm | | Finish | ⚖ g |
|-------------|--------------|------|------|---------|-----|
| 92 69 84 | 054948 | 130 | ✳️ 📏 | plastic | 19 |

Precision Tweezers

rectangular blunt

92

- > mounting tweezers
- > rectangular tips, approx. 0.9 mm wide
- > gripping surfaces with fine transverse serration
- > nickel plated
- > Spring steel, high-strength



92 84 18
✳️ 📏

| Article No. | EAN 4003773- | ↔ mm | | Finish | ⚖ g |
|-------------|--------------|------|------|---------------|-----|
| 92 84 18 | 054986 | 125 | ✳️ 📏 | nickel plated | 19 |

Cross-Over Tweezers

92

- > for holding small parts without finger pressure
- > for efficient clamping
- > nickel plated
- > Spring steel, high-strength

92 94 91

for ultra fine mounting work; extra fine tips; straight pattern; gripping surfaces matt finish for optimum grip

92 37 64

angled tips; gripping surfaces with fine transverse serration

92 67 63

straight pattern; serrated gripping surfaces

92 27 62

straight pattern; gripping surfaces with fine transverse serration

| Article No. | EAN 4003773- | ↔ mm | | Finish | ⚖ g |
|-------------|--------------|------|--|---------------|-----|
| 92 94 91 | 055006 | 160 | | nickel plated | 35 |
| 92 95 89 | 055013 | 160 | | nickel plated | 30 |
| 92 95 90 | 055020 | 160 | | nickel plated | 32 |



92 94 91



92 95 89



92 95 90

Precision Tweezers

insulated
IEC 60900

92

- > tested according IEC 60900
- > with dipped insulation
- > nickel plated
- > Spring steel, high-strength

92 27 61

for ultra fine mounting work; extra fine tips; straight pattern; gripping surfaces matt finish for optimum grip

92 27 62

straight pattern; gripping surfaces with fine transverse serration

92 37 64

angled tips; gripping surfaces with fine transverse serration

92 67 63

straight pattern; serrated gripping surfaces



92 27 61



92 27 62



92 37 64



92 67 63

| Article No. | EAN 4003773- | ↔ mm | | Finish | ⚖ g |
|-------------|--------------|------|--|------------------------|-----|
| 92 27 61 | 054757 | 130 | | with dipped insulation | 32 |
| 92 27 62 | 054764 | 150 | | with dipped insulation | 35 |
| 92 37 64 | 054856 | 150 | | with dipped insulation | 34 |
| 92 67 63 | 054931 | 145 | | with dipped insulation | 43 |

Precision Tweezers ESD

92

- > Chrome nickel steel: stainless, anti-magnetic (18/10), very popular electronics quality
- > ESD coating: non-reflective black, with a surface resistance of approx. 10^5 Ohm
- > tips non-reflective brushed
- > gripping surfaces matt finish for optimum grip
- > Chrome nickel steel, stainless, anti-magnetic

92 08 78 ESD

for SMD-technology*; angled tips; smooth gripping surfaces

92 08 79 ESD

shaped to grip horizontal cylindrical components of 1.0 mm dia.; smooth gripping surfaces; serrated handles

92 28 69 ESD

straight pattern; strong tip; smooth gripping surfaces

92 28 70 ESD

straight pattern; fine tip; smooth gripping surfaces

92 28 71 ESD

needle-pointed tips; straight pattern; smooth gripping surfaces

92 28 72 ESD

American shape, solid; long tips; straight pattern; smooth gripping surfaces

92 38 75 ESD

sickle-shaped tips; smooth gripping surfaces

92 58 74 ESD

round tips, approx. 2 mm wide; straight pattern; smooth gripping surfaces

92 78 77 ESD

round tips, approx. 3.5 mm wide; straight pattern; serrated gripping surfaces; serrated handles

92 88 73 ESD

rectangular tips, approx. 0.9 mm wide; gripping surfaces with fine transverse serration



92 08 78 ESD



92 08 79 ESD



92 28 69 ESD



92 28 70 ESD



92 28 71 ESD



92 28 72 ESD



92 38 75 ESD



92 58 74 ESD



92 78 77 ESD



92 88 73 ESD

| Article No. | EAN 4003773- | ↔ mm | | Finish | g |
|--------------|--------------|------|--|--|----|
| 92 08 78 ESD | 054634 | 120 | | stainless, anti-magnetic, electrically dissipative | 16 |
| 92 08 79 ESD | 054641 | 120 | | stainless, anti-magnetic, electrically dissipative | 16 |
| 92 28 69 ESD | 054771 | 130 | | stainless, anti-magnetic, electrically dissipative | 20 |
| 92 28 70 ESD | 054788 | 110 | | stainless, anti-magnetic, electrically dissipative | 13 |
| 92 28 71 ESD | 054795 | 110 | | stainless, anti-magnetic, electrically dissipative | 14 |
| 92 28 72 ESD | 054801 | 135 | | stainless, anti-magnetic, electrically dissipative | 22 |
| 92 38 75 ESD | 054863 | 120 | | stainless, anti-magnetic, electrically dissipative | 17 |
| 92 58 74 ESD | 054900 | 120 | | stainless, anti-magnetic, electrically dissipative | 19 |
| 92 78 77 ESD | 054979 | 145 | | stainless, anti-magnetic, electrically dissipative | 27 |
| 92 88 73 ESD | 054993 | 130 | | stainless, anti-magnetic, electrically dissipative | 20 |

* SMD-Technology: technique for soldering surface mounted components on printed circuit boards without using holes

Pliers with tether attachment point
for mounting a fall protection



Pliers range with tether attachment point
for mounting a fall protection

256





The tether attachment point for the range with multi-component handles

Tools can fall down when used on cherry pickers, scaffolding and ladders and when used by industrial climbers working with wire rope hoists.

KNIPEX offers a range of pliers with reliable protection to prevent them falling down.

An extremely stable tether attachment that is permanently welded to the handle is provided on the inside of the handle for attaching a tether. It enables equipment to be secured and put down quickly, either directly using the rope (paracord) strap or an appropriately small snap hook placed on a lanyard. In case of doubt, a rope (paracord) adapter can be used to adapt it to any existing tool fall arrest system.


















Tether attachment: dynamic load capacity for a max. fall height of 3 m / 10 ft by a tool from the KNIPEX TT range (or static load with max. 400 N / 90 lb).















Product video



*(TT) Tethered Tools

PLIERS WITH TETHER ATTACHMENT POINT

| | Article No. | Description | Page |
|---|--------------------|---|------|
|  | 02 02 225 T | High Leverage Combination Pliers, with tether attachment point for a tool tether DIN ISO 5746 | 29 |
|  | 08 22 145 T | Needle-Nose Combination Pliers, with tether attachment point for a tool tether DIN ISO 5746 | 31 |
|  | 09 02 240 T | Lineman's Pliers, with tether attachment point for a tool tether, American style DIN ISO 5746 ASME B107.20 | 33 |
|  | 09 12 240 T | | 33 |
|  | 13 05 160 T | Electricians' Pliers, with tether attachment point for a tool tether | 36 |
|  | 13 82 200 T | Pliers for Electrical Installation, with tether attachment point for a tool tether | 34 |
|  | 26 12 200 T | Snipe Nose Side Cutting Pliers, (Stork Beak Pliers), with tether attachment point for a tool tether DIN ISO 5745 | 39 |
|  | 26 15 200 T | | 39 |
|  | 26 22 200 T | | 39 |
|  | 26 25 200 T | | 39 |
|  | 70 05 160 T | Diagonal Cutters, with tether attachment point for a tool tether DIN ISO 5749 | 95 |
|  | 70 05 180 T | | 94 |
|  | 71 02 200 T | KNIPEX CoBolt®, Compact Bolt Cutters, with tether attachment point for a tool tether DIN ISO 5743 | 102 |
|  | 71 22 200 T | | 103 |
|  | 71 32 200 T | | 103 |

| | Article No. | Description | Page |
|--|--------------------|---|------|
|  | 73 05 160 T | KNIPEX X-Cut®, Compact Diagonal Cutters, with tether attachment point for a tool tether | 97 |
|  | 74 02 200 T | High Leverage Diagonal Cutters, with tether attachment point for a tool tether DIN ISO 5746 | 98 |
|  | 74 02 250 T | | 98 |
|  | 74 22 200 T | | 98 |
|  | 74 22 250 T | | 98 |
|  | 86 05 180 T | Pliers Wrenches, pliers and a wrench in a single tool, with tether attachment point for a tool tether DIN ISO 5743 | 112 |
|  | 86 05 250 T | | 112 |
|  | 87 02 180 T | KNIPEX Cobra®, Hightech Water Pump Pliers, with tether attachment point for a tool tether DIN ISO 8976 | 117 |
|  | 87 02 250 T | | 117 |
|  | 87 02 300 T | | 117 |
|  | 88 02 250 T | KNIPEX Alligator®, Water Pump Pliers, with tether attachment point for a tool tether DIN ISO 8976 | 123 |
|  | 88 02 300 T | | 123 |
|  | 95 12 165 T | Cable Shears, with tether attachment point for a tool tether | 154 |
|  | 95 62 190 T | Wire Rope Cutters, forged, with tether attachment point for a tool tether | 162 |

Tool Assortment and Cases



| | |
|---|-----|
| Tool Roll | 260 |
| KNIPEX Minis | 260 |
| Pliers Sets in a foam tray | 261 |
| Tool Kits | 262 |
| Tool Bag for electrical contractors | 264 |
| Apprentices tool Bag for electrical contractors | 265 |
| Tool Case "Electric" | 266 |
| Tool Case for electrical contractors | 268 |
| Belt Pouch | 268 |
| Belt Tool Pouch | 268 |
| Tool Case "Basic" | 270 |
| Tool Case "Standard" | 270 |
| Tool Case "Classic II" | 271 |
| Tool Case "Big Twin" | 271 |
| Tool Case "Big Twin Move" | 272 |
| Tool Bag empty | 273 |
| Tool Case "Robust" | 273 |



Tool Roll

11 parts

00
19

- > for telecommunications and electrical engineers
- > tool roll made of hard-wearing polyester fabric
- > with practical, adjustable quick release fastener
- > contains eight pliers and three screwdrivers
- > pliers with chrome plated heads and two-colour dual component handles
- > screwdrivers VDE tested according to DIN EN/IEC 60900 1000V



| Article No. | EAN 4003773- | | | | Quantity | ⚖ g |
|-----------------|--------------|--|--------------------|--|----------|--------|
| 00 19 41 | 024729 | | Tool Roll 11 parts | | | 1620 |
| | | | 03 05 160 | Combination Pliers | 1 | |
| | | | 11 05 160 | Insulation Strippers | 1 | |
| | | | 25 05 160 | Snipe Nose Side Cutting Pliers (Radio Pliers) | 1 | |
| | | | 30 15 160 | Long Nose Pliers | 1 | |
| | | | 30 35 160 | | 1 | |
| | | | 31 15 160 | Flat Nose Pliers (Needle-Nose Pliers) | 1 | |
| | | | 67 05 140 | High Leverage End Cutting Nipper | 1 | |
| | | | 70 05 140 | Diagonal Cutter | 1 | |
| | | | 98 20 25 | Screwdriver for slotted screws | 1 | |
| | | | 98 20 40 | | 1 | |
| | | | 98 24 01 | Screwdriver for cross recessed screws, Phillips® | 1 | |

KNIPEX Minis in belt pouch

2 parts

00
20

- > KNIPEX Minis as "little helpers" in the practical belt pouch
- > made of hard-wearing polyester fabric
- > with hook and loop fastener
- > with elastic side holder for small flash lamp, pen or suchlike
- > with practical belt loop
- > dimensions (W x H x D): 70 x 170 x 50 mm



00 20 72 V01

00 20 72 V02

| Article No. | EAN 4003773- | | | | Quantity | ⚖ g |
|---------------------|--------------|--|------------------------------------|--|----------|--------|
| 00 20 72 V01 | 070832 | | KNIPEX Minis in belt pouch 2 parts | | | 350 |
| | | | 86 03 150 | Mini Pliers Wrench, pliers and a wrench in a single tool | 1 | |
| | | | 87 01 125 | KNIPEX Cobra®, Hightech Water Pump Pliers | 1 | |
| 00 20 72 V02 | 075851 | | KNIPEX Minis in belt pouch 2 parts | | | 390 |
| | | | 74 01 160 | High Leverage Diagonal Cutter | 1 | |
| | | | 87 01 150 | KNIPEX Cobra®, Hightech Water Pump Pliers | 1 | |
| 00 19 72 LE | 070191 | | Belt Pouch | | | |

Pliers Sets

in a foam tray

00
20

- > in a foam tray for workbenches and tool trolleys
- > clearly organised storage of tools
- > precisely-sized recesses for holding the pliers
- > foam tray dimensions (W x H x D): 335 x 165 x 33 mm
- > material: two colour, closed pore foam



00 20 01 V01
Pliers Set "Basic" – four pliers in a foam tray



00 20 01 V02
Circlip Pliers Set – six precision circlip pliers in a foam tray



00 20 01 V03
Water Pump Pliers Set – three pliers in a foam tray



00 20 01 V09
Circlip Pliers Set "SRZ II" – four precision circlip pliers in a foam tray



| Article No. | EAN | | | Quantity | g |
|---------------------|----------------|--|--|----------|------|
| 00 20 01 V01 | 4003773-069645 | | Pliers Set "Basic", four pliers in a foam tray | | 1095 |
| | | | 03 05 180 Combination Pliers | 1 | |
| | | | 26 15 200 Snipe Nose Side Cutting Pliers (Stork Beak Pliers) | 1 | |
| | | | 74 05 180 High Leverage Diagonal Cutter | 1 | |
| | | | 87 01 250 KNIPEX Cobra®, Hightech Water Pump Pliers | 1 | |
| 00 20 01 V02 | 069652 | | Circlip Pliers Set, six precision circlip pliers in a foam tray | | 915 |
| | | | 48 11 J1 | 1 | |
| | | | 48 11 J2 | 1 | |
| | | | 48 21 J21 | 1 | |
| | | | 49 11 A1 | 1 | |
| | | | 49 11 A2 | 1 | |
| | | | 49 21 A21 | 1 | |
| 00 20 01 V03 | 069669 | | Water Pump Pliers Set, three pliers in a foam tray | | 1065 |
| | | | 85 01 250 KNIPEX SmartGrip®, Water Pump Pliers with automatic adjustment | 1 | |
| | | | 87 41 250 Multiple Slip Joint Spanner | 1 | |
| | | | 87 51 250 KNIPEX Cobra® ES, Water Pump Pliers extra-slim | 1 | |
| 00 20 01 V09 | 073291 | | Pliers Set „SRZ II“, four precision circlip pliers in a foam tray | | 820 |
| | | | 48 11 J2 | 1 | |
| | | | 48 21 J21 | 1 | |
| | | | 49 11 A2 | 1 | |
| | | | 49 21 A21 | 1 | |

Tool Kits

00
20

- > tools in a plastic deep-drawn tray with transparent lid
- > attractive sales packaging with Euro standard perforation
- > dimensions (W x H x D): 170 x 370 x 40 mm



00 20 09 V01 Bestseller Set
pliers with polished heads; handles with non-slip plastic coating or with two-colour multi-components grips

| Article No. | EAN 4003773- | | | | Quantity | Nominal size | g |
|---------------------|--------------|--|----------------|---|----------|--------------|-----|
| 00 20 09 V01 | 073994 | | Bestseller-Set | | | | 950 |
| | | | 03 02 180 | Combination Pliers | 1 | 180 mm | |
| | | | 70 02 160 | Diagonal Cutter | 1 | 160 mm | |
| | | | 87 01 250 | KNIPEX Cobra®, Hightech Water Pump Pliers | 1 | 250 mm | |



00 20 09 V02 Cobra® Set
pliers grey afromentized, handles with non-slip plastic coating

| Article No. | EAN 4003773- | | | | Quantity | Nominal size | g |
|---------------------|--------------|--|------------|---|----------|--------------|------|
| 00 20 09 V02 | 074793 | | Cobra® Set | | | | 1220 |
| | | | 87 01 180 | KNIPEX Cobra®, Hightech Water Pump Pliers | 1 | 180 mm | |
| | | | 87 01 250 | | 1 | 250 mm | |
| | | | 87 01 300 | | 1 | 300 mm | |



00 20 09 V03 Alligator® Set
pliers with polished heads; handles with non-slip plastic coating

| Article No. | EAN 4003773- | | | | Quantity | Nominal size | g |
|---------------------|--------------|--|----------------|--------------------------------------|----------|--------------|------|
| 00 20 09 V03 | 074809 | | Alligator® Set | | | | 1195 |
| | | | 88 01 180 | KNIPEX Alligator®, Water Pump Pliers | 1 | 180 mm | |
| | | | 88 01 250 | | 1 | 250 mm | |
| | | | 88 01 300 | | 1 | 300 mm | |



00 20 10 Power Set
pliers with polished heads and plastic coated handles

| Article No. | EAN 4003773- | | | | Quantity | Nominal size | g |
|-----------------|--------------|--|-----------|---|----------|--------------|-----|
| 00 20 10 | 010388 | | Power Set | | | | 990 |
| | | | 02 01 180 | High Leverage Combination Pliers | 1 | 180 mm | |
| | | | 74 01 160 | High Leverage Diagonal Cutter | 1 | 160 mm | |
| | | | 87 01 250 | KNIPEX Cobra®, Hightech Water Pump Pliers | 1 | 250 mm | |



00 20 11 Assembly Set

pliers with two-colour multi-component grips

| Article No. | EAN 4003773- | | | | Quantity | Nominal size | g |
|-----------------|--------------|--|--------------|--|----------|--------------|-----|
| 00 20 11 | 012405 | | Assembly Set | | | | 810 |
| | | | 03 02 180 | Combination Pliers | Knipex | 180 mm | |
| | | | 26 12 200 | Snipe Nose Side Cutting Pliers (Stork Beak Pliers) | | 200 mm | |
| | | | 70 02 160 | Diagonal Cutter | | 160 mm | |



00 20 12 Electro Set

pliers VDE-tested in conformance with DIN EN/IEC 60900 1000V, pliers chrome-plated; handles with multi-component grips

| Article No. | EAN 4003773- | | | | Quantity | Nominal size | g |
|-----------------|--------------|--|-------------|--|----------|--------------|-----|
| 00 20 12 | 012412 | | Electro Set | | | | 960 |
| | | | 03 06 180 | Combination Pliers | Knipex | 180 mm | |
| | | | 26 16 200 | Snipe Nose Side Cutting Pliers (Stork Beak Pliers) | | 200 mm | |
| | | | 70 06 160 | Diagonal Cutter | | 160 mm | |



00 20 13 VDE Tool Set

tools VDE-tested in conformance to DIN EN/IEC 60900 1000V, pliers chrome-plated; handles with multi-component covers; with 3 WERA screwdrivers

| Article No. | EAN 4003773- | | | | Quantity | Nominal size | g |
|-----------------|--------------|--|--------------|---|----------|--------------------|-----|
| 00 20 13 | 043287 | | VDE Tool Set | | | | 850 |
| | | | 26 16 200 | Snipe Nose Side Cutting Pliers (Stork Beak Pliers) | Knipex | 200 mm | |
| | | | 70 06 160 | Diagonal Cutter | | 160 mm | |
| | | | 006110 | Screwdrivers for slotted screws, 160i | Wera | 0.6 x 3.5 x 100 mm | |
| | | | 006120 | Screwdrivers for slotted screws, 160i | | 1.0 x 5.5 x 125 mm | |
| | | | 006154 | Screwdrivers for cross recessed Phillips® screws, 162i PH | | PH2 x 100 mm | |

Tool Bag

24 parts
for electrical contractors, top model

00
21

- > contains 24 brand name tools, partly VDE tested according to DIN EN/IEC 60900
- > comfortable bag of hard-wearing leather, with front bag, adjustable retaining loops and belt
- > with galvanized steel base tray
- > edges of the tool case reinforced with aluminium
- > dimensions, interior (W x H x D): 420 x 250 x 160 mm



| Article No. | EAN | | | | | Quantity | Nominal size | △ g |
|-------------|----------------|----------|-------------------|---|-------------|----------|--------------------|--------|
| 00 21 01 TL | 4003773-032694 | | Tool Bag 24 parts | | | | | 6990 |
| | | △ 1000 V | 03 06 180 | Combination Pliers | Knipex | 1 | 180 mm | |
| | | △ 1000 V | 11 06 160 | Insulation Stripper | | 1 | 160 mm | |
| | | △ 1000 V | 25 06 160 | Snipe Nose Side Cutting Pliers, Radio Pliers | | 1 | 160 mm | |
| | | △ 1000 V | 70 06 160 | Diagonal Cutter | | 1 | 160 mm | |
| | | △ 1000 V | 98 52 | Cable Knife | | 1 | 185 mm | |
| | | MMM | 16 20 165 | Dismantling Tool | | 1 | 165 mm | |
| | | | 361 252 1 | Electrician's Chisel | Rennsteig | 1 | 250 x 10 mm | |
| | | | 340 300 1 | Mason's Chisels | | 1 | | |
| | | | 006100 | Screwdrivers for slotted screws, 160i | Wera | 1 | 0.4 x 2.5 x 80 mm | |
| | | △ 1000 V | 006110 | | | 1 | 0.6 x 3.5 x 100 mm | |
| | | | 006120 | | | 1 | 1.0 x 5.5 x 125 mm | |
| | | | 006125 | | | 1 | 1.2 x 6.5 x 150 mm | |
| | | △ 1000 V | 006152 | Screwdrivers for cross recessed Phillips® screws, 162i PH | Wera | 1 | PH1 x 80 mm | |
| | | | 006154 | | | 1 | PH2 x 100 mm | |
| | | | 007620 | Screwdrivers for slotted screws, 334 | Wera | 1 | 1.0 x 6.0 x 125 mm | |
| | | ● | 110010 | | | 1 | 1.2 x 6.5 x 150 mm | |
| | | | 005655 | Voltage Detector, 247 | | 1 | 0.5 x 3.0 x 70 mm | |
| | | | 101-0300 | Locksmith's hammer | Picard | 1 | 300 g | |
| | | | 30490-800 | Chipping hammer | | 1 | 800 g | |
| | | | 75040-015 | Flat brush | | 1 | 40 mm | |
| | | | 75075-040 | Painter's spatula | | 1 | 40 mm | |
| | | | 71510-000 | Metre ruler (yardstick) | | 1 | 2 m | |
| | | | 306125 | PUK® Junior Hacksaw | Haunstätter | 1 | 150 x 240 mm | |
| | | | 7165/50 | Plasterer's bowl | Nölle | 1 | 125 x 90 mm | |

Tool Bag

24 parts

apprentices tool bag for electrical contractors

00
21

- > light design made of hard-wearing, reinforced polyester fabric
- > front additionally reinforced with aluminium brackets
- > semi-fold-out front with adjustable loops and exterior document compartment
- > with galvanized steel base tray
- > with carrying handle and adjustable shoulder strap
- > dimensions, interior (W x H x D): 420 x 250 x 160 mm

Model 00 21 02 SL

contains 24 brand name tools,
partly VDE tested according to DIN EN/IEC 60900

Model 00 21 02 LE

without tools



00 21 02 SL

| Article No. | EAN | | | | | Quantity | Nominal size | ⚖ g |
|-------------|----------------|--|------------------------------------|---|----------------------|--------------|--------------------|--------|
| 00 21 02 SL | 4003773-032687 | | Tool Bag 24 parts | | | | | 6980 |
| | | | 03 05 180 | Combination Pliers | Knipex | 1 | 180 mm | |
| | | | 11 05 160 | Insulation Stripper | | 1 | 160 mm | |
| | | | 16 20 165 | Dismantling Tool | | 1 | 165 mm | |
| | | | 25 05 160 | Snipe Nose Side Cutting Pliers (Radio Pliers) | | 1 | 160 mm | |
| | | | 70 05 160 | Diagonal Cutter | | 1 | 160 mm | |
| | | | 98 52 | Cable Knife | | 1 | 185 mm | |
| | | | 361 252 1 | Electrician's Chisel | Rennsteig | 1 | 250 x 10 mm | |
| | | | 340 250 1 | Mason's Chisels | | 1 | 250 mm | |
| | | | 101-0300 | Locksmith's hammer | | 1 | 300 g | |
| | | | 401-1000 | Sledge hammer | Picard | 1 | 1000 g | |
| | | | 75040-015 | Flat brush | | 1 | 40 mm | |
| | | | 75075-040 | Painter's spatula | | 1 | 40 mm | |
| | | | 71501-024 | Carpenter's pencil | | 1 | 24 cm | |
| | | | 031580 | Screwdrivers for slotted screws, 1160i | Wera | 1 | 0.4 x 2.5 x 80 mm | |
| | | | 031582 | | | 1 | 0.6 x 3.5 x 100 mm | |
| | | | 031587 | | | 1 | 1.0 x 5.5 x 125 mm | |
| | | | 031588 | | | 1 | 1.2 x 6.5 x 150 mm | |
| | | | 031601 | | | 1 | PH1 x 80mm | |
| | | | 031603 | Screwdrivers for cross recessed Phillips® screws, 1162i | 1 | PH2 x 100 mm | | |
| | | | 031611 | | 1 | PZ1 x 80 mm | | |
| | | | 031613 | | 1 | PZ2 x 100 mm | | |
| | | | 005655 | Voltage Detector, 247 | Haunstätter Nölle | 1 | 0.5 x 3.0 x 70 mm | |
| | | | 306125 | PUK® Junior Hacksaw | | 1 | 150 x 240 mm | |
| | | | 7165/50 | Plasterer's bowl | | 1 | 125 x 90 mm | |
| 00 21 02 LE | 057499 | | Tool Bag "New Classic Basic" empty | | | | | 3400 |

Tool Case "Electric"

20 parts

**00
21**

- > heavy duty ABS material, black
- > with circumferential double aluminium frame
- > register hinges working as lid holder
- > strong, ergonomic handle
- > two flip-locks, lockable
- > one removable tool board in the lid with 15 push-in compartments on the bottom side and six big push-in compartments and a clamp compartment (400 mm width) on the lid side, fixed by push-button
- > base tray, height 58 mm, can be subdivided by flexible inserts; cover plate with six large push-in compartments, can be fixed by popper
- > cover and tool plate made of Con-Pearl® material
- > 20 kg maximum load
- > dimensions, exterior (W x H x D): 480 x 175 x 370 mm
- > dimensions, interior (W x H x D): 460 x 170 x 310 mm

00 21 20

with 20 brand name tools, partly VDE tested according to DIN EN/IEC 60900

00 21 20 LE

without tools



00 21 20

| Article No. | EAN 4003773- 052166 | | | | Quantity | Nominal size | g | |
|--------------------|---------------------------|----------|--------------------------------|--|----------------------|---------------------------------|--------------|--|
| 00 21 20 | 052166 | | Tool Case "Electric", 20 parts | | | | 7225 | |
| | | ⚠ 1000 V | 03 06 180 | Combination Pliers | Knipex | 180 mm | | |
| | | MM | 12 40 200 | Self-Adjusting Insulation Stripper | | 200 mm | | |
| | | | 16 80 125 | Universal Dismantling Tool | | 125 mm | | |
| | | ⚠ 1000 V | 26 16 200 | Snipe Nose Side Cutting Pliers, | | 200 mm | | |
| | | ⚠ 1000 V | 26 26 200 | (Stork Beak Pliers) | | 200 mm | | |
| | | ⚠ 1000 V | 70 06 160 | Diagonal Cutter | | 160 mm | | |
| | | ⚠ 1000 V | 74 06 200 | High Leverage Diagonal Cutter | | 200 mm | | |
| | | | 86 03 180 | Pliers Wrench, pliers and a wrench in a single tool | | 180 mm | | |
| | | | 87 03 250 | KNIPLEX Cobra®, Hightech Water Pump Pliers | | 250 mm | | |
| | | ⚠ 1000 V | 95 16 200 | Cable Shears, with twin cutting edge | | 200 mm | | |
| | | ⚠ 1000 V | 98 56 | Cable Knife, with replaceable blade | 185 mm | | | |
| | | | 006100 | Screwdrivers for slotted screws, 160i | Wera | 0.4 x 2.5 x 80 mm | | |
| | | ⚠ 1000 V | 006115 | | | 0.8 x 4.0 x 100 mm | | |
| | | | 006120 | | | 1.0 x 5.5 x 125 mm | | |
| | | | 006125 | | | 1.2 x 6.5 x 150 mm | | |
| | | ⚠ 1000 V | 006152 | | | Screwdrivers for cross recessed | PH1 x 80 mm | |
| | | | 006154 | | | Phillips® screws, 162i PH | PH2 x 100 mm | |
| | | ⚠ 1000 V | 006162 | | | Screwdrivers for cross recessed | PZ1 x 80 mm | |
| | | | 006164 | | | Pozidriv® screws, 165i | PZ2 x 100 mm | |
| | | | 005655 | Voltage Detector | 0.5 x 3.0 x 70 mm | | | |
| 00 21 20 LE | 044567 | | Tool Case "Standard" empty | | | | 4485 | |

Tool Case "Electric"

23 parts

00
21

- > contains 23 brand name tools, partly VDE tested according to DIN EN/IEC 60900, 1000 V
- > hard-wearing ABS hard-shell construction with aluminium frame and circular buffer protection
- > document compartment and pen holding straps
- > one removable tool plate, with elastic loops on both sides
- > one cover plate with elastic loops and tool protection cloth
- > large base tray with variable separations (e.g. for measuring and testing devices). Interior dimensions: 420 x 320 x 85 mm
- > sturdy metal locks and 3-digit-lock
- > strong, ergonomic handle
- > feet on both sides
- > colour: silver / aluminium look



00 21 30

| Article No. | EAN 4003773- | | | | Quantity | Nominal size | g |
|-----------------|-----------------|--|-----------|---|----------|--------------------|------|
| 00 21 30 | 051084 | Tool Case for electrical contractors, 23 parts | | | | | 9440 |
| | | | 00 11 03 | Control Cabinet Key, for all standard cabinets and shut-off systems | 1 | 76 mm | |
| | | | 03 06 180 | Combination Pliers | 1 | 180 mm | |
| | | | 12 40 200 | Self-Adjusting Insulation Stripper | 1 | 200 mm | |
| | | | 16 80 125 | Universal Dismantling Tool | 1 | 125 mm | |
| | | | 26 16 200 | Snipe Nose Side Cutting Pliers, (Stork Beak Pliers) | 1 | 200 mm | |
| | | | 26 26 200 | | 1 | 200 mm | |
| | | | 70 06 125 | Diagonal Cutter | 1 | 125 mm | |
| | | | 70 06 160 | | 1 | 160 mm | |
| | | | 86 03 180 | Pliers Wrench, pliers and a wrench in a single tool | 1 | 180 mm | |
| | | | 87 03 250 | KNIPLEX Cobra®, Hightech Water Pump Pliers | 1 | 250 mm | |
| | | | 92 27 62 | Precision Tweezers | 1 | 150 mm | |
| | | | 98 56 | Cable Knife, with replaceable blade | 1 | 185 mm | |
| | | | 006100 | Screwdrivers for slotted screws, 160i | 1 | 0.4 x 2.5 x 80 mm | |
| | | | 006110 | | 1 | 0.6 x 3.5 x 100 mm | |
| | | | 006115 | | 1 | 0.8 x 4.0 x 100 mm | |
| | | | 006120 | | 1 | 1.0 x 5.5 x 125 mm | |
| | | | 006125 | | 1 | 1.2 x 6.5 x 150 mm | |
| | | | 006130 | | 1 | 1.2 x 8.0 x 175 mm | |
| | | | 006150 | Screwdrivers for cross recessed Phillips® screws | 1 | PH0 x 80 mm | |
| | | | 006152 | | 1 | PH1 x 80 mm | |
| | | | 006154 | | 1 | PH2 x 100 mm | |
| | | | 006162 | Screwdrivers for cross recessed Pozidriv® screws | 1 | PZ1 x 80 mm | |
| | | | 006164 | | 1 | PZ2 x 100 mm | |

TOOL CASES

Belt Pouch

for two pliers

00
19

- > for two pliers up to 150 mm length
- > made of hard-wearing polyester fabric
- > with hook and loop fastener
- > with elastic side holder for small flash lamp, pen or suchlike
- > with practical belt loop

| Article No. | EAN 4003773- | Width mm | Height mm | Depth mm | g |
|--------------------|-----------------|-------------|--------------|-------------|----|
| 00 19 72 LE | 070191 | 65 | 155 | 25 | 65 |

00 19 72 LE



Belt Tool Pouch

empty

00
19

- > made of hard-wearing polyester fabric and leather
- > with pockets for up to 8 tools
- > tool loops made of leather, riveted
- > with snap hook

| Article No. | EAN 4003773- | Width mm | Height mm | Depth mm | g |
|--------------------|-----------------|-------------|--------------|-------------|-----|
| 00 19 73 LE | 072065 | 170 | 235 | 75 | 210 |

00 19 73 LE



Tool Bag "New Classic Basic"

empty

00
21

- > light design made of hard-wearing, reinforced polyester fabric
- > front additionally reinforced with aluminium brackets
- > semi-fold-out front with adjustable loops and exterior document compartment
- > with galvanized steel base tray
- > with carrying handle and adjustable shoulder strap

Model 00 21 02 LE

without tools



00 21 02 LE

| Article No. | EAN 4003773- | Dimension exterior width mm | Dimension exterior height mm | Dimension exterior depth mm | g |
|--------------------|-----------------|--------------------------------|---------------------------------|--------------------------------|------|
| 00 21 02 LE | 057499 | 440 | 270 | 180 | 2970 |

Traditional Tool Pouch

empty

00
21

- > made of hard-wearing polyester fabric
- > for tools up to approx. 450 mm in length
- > with document compartment on the back
- > with carrying handle and adjustable shoulder strap
- > closing strap made of leather
- > dimensions, exterior (W x H x D): 520 x 200 x 230 mm, dimensions, interior (W x H x D): 490 x 140 x 155 mm

| Article No. | EAN 4003773- | Width mm | Height mm | Depth mm | ⚖ g |
|--------------------|-----------------|-------------|--------------|-------------|--------|
| 00 21 07 LE | 071358 | 520 | 200 | 230 | 1510 |

**00 21 07 LE****Tool Bag "LightPack"**

empty

00
21

- > can be opened both sides
- > made from tough polyester fabric, with zip fasteners and hook and loop fastener
- > tool loops inside
- > plastic base tray
- > steel handle with softgrip
- > shoulder strap (can also be used as tool belt) with small pouch for the mobile
- > 20 kg maximum load

| Article No. | EAN 4003773- | Width mm | Height mm | Depth mm | ⚖ g |
|--------------------|-----------------|-------------|--------------|-------------|--------|
| 00 21 08 LE | 077787 | 480 | 380 | 300 | 3450 |

**00 21 08 LE****Tool and notebook bag for service technicians**

empty

00
21

- > lined inside pouch for notebook and DIN A4 documents; also 1 DIN A4 zipped compartment
- > 90° fold-out front pouch with 8 tool pouches and 1 small inside pouch
- > reverse side of the front pouch with 5 tool pouches and 3 pen pouches
- > 1 removeable tool panel with 8 tool pouches on the front and 2 rows of elastic loops on the back
- > splash-water-protected bottom
- > adjustable shoulder belt with quick-release fastener
- > with two carry loops
- > made of hard-wearing polyester fabric

**00 21 10 LE**

| Article No. | EAN 4003773- | Dimension exterior width mm | Dimension exterior height mm | Dimension exterior depth mm | ⚖ g |
|--------------------|-----------------|--------------------------------|---------------------------------|--------------------------------|--------|
| 00 21 10 LE | 074472 | 440 | 200 | 340 | 2700 |

Tool Case "Basic"

empty

00
21

- > heavy duty ABS material, black
- > circumferential aluminium frame with D-shape rings for the shoulder strap (included)
- > 3-digit lock and two flip-locks for fixation of the cover
- > strong, ergonomic handle
- > metal hinges
- > lid holder with hinge-joint mechanism
- > document compartment in the cover
- > removable tool board in the lid with nine push-in compartments and an elastic loop on the lid side; with ten slim and one large push in compartments on the bottom side
- > base tray, height 55 mm, can be subdivided by inserts; cover plate with 12 large push-in compartments and a flat compartment, can be fixed by popper
- > load capacity: 15 kg



00 21 05 LE

| Article No. | EAN 4003773- | Dimension exterior (interior) width mm | Dimension exterior (interior) height mm | Dimension exterior (interior) depth mm | ⚖ g |
|-------------|-----------------|---|--|---|--------|
| 00 21 05 LE | 056904 | 465 (440) | 200 (180) | 410 (350) | 5680 |

Tool Case "Standard"

empty

00
21

- > heavy duty ABS material, black
- > with circumferential double aluminium frame
- > register hinges working as lid holder
- > strong, ergonomic handle
- > two flip-locks, lockable
- > one removable tool board in the lid with 15 push-in compartments on the bottom side and six big push-in compartments and a clamp compartment (400 mm width) on the lid side, fixed by push-button
- > base tray, height 58 mm, can be subdivided by flexible inserts; cover plate with six large push-in compartments, can be fixed by popper
- > cover and tool plate made of Con-Pearl® material
- > 20 kg maximum load



00 21 20 LE

| Article No. | EAN 4003773- | Dimension exterior (interior) width mm | Dimension exterior (interior) height mm | Dimension exterior (interior) depth mm | ⚖ g |
|-------------|-----------------|---|--|---|--------|
| 00 21 20 LE | 044567 | 480 (460) | 175 (170) | 370 (310) | 4485 |

Tool Case "Classic II"

empty

00
21

- > heavy duty ABS material, black
- > with circumferential double aluminium frame
- > register hinges working as lid holder
- > sturdy multi-component handle with grip recesses
- > two flip-locks, lockable
- > document compartment in the cover
- > one removable tool board in the lid with CP7-tool holder (thickness 11 mm) on the bottom side
- > one tool board in the lid with CP7-tool holder (thickness 11 mm) on the lid side and CP7- tool holder (thickness 15 mm) on the bottom side
- > base tray, height 58 mm, can be subdivided by flexible inserts; cover plate with CP7-tool holder (thickness 25 mm) on the lid side, can be fixed by popper
- > cover and tool plate made of Con-Pearl® material
- > 30 kg maximum load



00 21 32 LE

| Article No. | EAN 4003773- | Dimension exterior (interior) width mm | Dimension exterior (interior) height mm | Dimension exterior (interior) depth mm | ⚖ g |
|-------------|-----------------|---|--|---|--------|
| 00 21 32 LE | 057536 | 480 (415) | 180 (160) | 365 (300) | 5235 |

Tool Case "BIG Twin"

empty

00
21

00 21 40 LE

- > heavy duty ABS material, black
- > sturdy aluminium frame with D-shape rings for belt and fix, sturdy centre board with multi-purpose push-in facilities by elastic loops and twelve small pockets
- > comfortable handle and mounting device for a "Trolley" embedded in the bottom (available ordering ref. 00 21 40 T)
- > metal hinges
- > 30 kg maximum load
- > can be opened on one or both sides; bottom tray and cover can be opened independently
- > stands stable in any opening position due to lid-holders and hinge mechanisms on both sides, that register in a position of 45° and 90°
- > 3-digit lock and two flip-locks for fixation of the cover
- > removable document compartment and removable tool board, with 13 push-in compartments on one side
- > two flip-locks to fix the bottom
- > base tray, height 58 mm, can be subdivided by flexible inserts; cover plate with six large push-in compartments, can be fixed by popper
- > dimensions exterior: (W x H x D): 490 x 255 x 410 mm
- > dimensions interior: (W x H x D): 445 x (105 + 105) x 350 mm

00 21 40 T

- > telescopic handle for rolling transport of tool case
- > applicable for cases:
00 21 40 LE Tool Case "BIG Twin", 98 99 14 Universal Tool Case
- > height adjustable handle with catch
- > integrated mechanism for fixation to the case, for rapid assembly and removal
- > with two smooth castors
- > dimensions: 60 x 245 x 400 (1,000) mm (extended)



00 21 40 LE

| Article No. | EAN 4003773- | Dimension exterior (interior) width mm | Dimension exterior (interior) height mm | Dimension exterior (interior) depth mm | ⚖ g |
|-------------|-----------------|---|--|---|--------|
| 00 21 40 LE | 057673 | 490 (445) | 255 (105 + 105) | 410 (350) | 7550 |
| 00 21 40 T | 062981 | Trolley for rolling case transport | | | 1200 |

Tool Case "BIG Twin-Move"

with integrated rollers and telescopic handle, empty

00
21

- > heavy duty ABS material, black
- > all-round aluminium frame and firmly mounted sturdy centre board, each side offering multi-purpose push-in facilities by elastic loops and 12 small pockets
- > pull-out handle embedded in the base and two integrated smooth in-line skater runners
- > 30 kg maximum load
- > can be opened on one or both sides (V form); base tray and cover can be partially or fully opened independently of each other; stands securely in all opening positions; the special runners are gentle on the floor and ensure stability
- > lockable
- > removable document compartment and removable tool panel with 13 tool pouches
- > base tray, height 60 mm, can be subdivided by flexible inserts; tool panel as cover plate with 13 tool pouches



00 21 41 LE

| Article No. | EAN | Dimension exterior (interior) width mm | Dimension exterior (interior) height mm | Dimension exterior (interior) depth mm | ⚖ g |
|-------------|----------------|---|--|---|--------|
| 00 21 41 LE | 4003773-071549 | 510 (480/445) | 270 (105) | 410 (370/330) | 8600 |

Tool bag
empty

00
21

Compact tool bag for the service technician

- > perfectly fits in the KNIPEX BIG Twin 00 21 40 LE / 00 21 41 LE and other standard tool cases
- > with 8 tool pouches and 7 tool straps
- > slip-through back strap to attach to a trolley
- > made from tough polyester fabric, with zip fastener



00 21 11 LE

| Article No. | EAN | Dimension exterior width mm | Dimension exterior height mm | Dimension exterior depth mm | g |
|-------------|----------------|--------------------------------|---------------------------------|--------------------------------|-----|
| 00 21 11 LE | 4003773-077718 | 410 | 60 | 290 | 450 |

Tool case "ROBUST"
empty

00
21

Fit to fly case made from impact-resistant polypropylene

- > dustproof, airtight, watertight
- > air pressure compensation valve
- > temperatures ranging from -40° up to +80° C
- > padlock eyelets
- > document compartment; tool panels with 35 push-in compartments which can be filled with tools
- > 2 aluminium dividers to customize the bottom tray
- > 30 kg maximum load



Two-stage locks, easy to open – also with one hand



Automatic pressure compensation valve, permeable to air while keeping out water



00 21 35 LE

| Article No. | EAN | Dimension exterior (interior) width mm | Dimension exterior (interior) height mm | Dimension exterior (interior) depth mm | g |
|-------------|----------------|---|--|---|------|
| 00 21 35 LE | 4003773-077596 | 470 (437) | 190 (172) | 370 (307) | 4800 |

| | | | | | | | | | | | | | |
|----------------|-----|-------------|-----|--------------|-----|--------------|-----|-------------|-----|---------------|-----|-----------|----|
| 00 11 01 | 148 | 00 21 40 T | 231 | 09 02 240 T | 33 | 13 42 165 | 50 | 23 01 140 | 37 | 30 33 160 | 64 | 40 14 250 | 68 |
| 00 11 02 | 149 | 00 21 40 T | 271 | 09 02 240 T | 257 | 13 45 165 | 50 | 25 01 125 | 38 | 30 35 140 | 64 | 41 04 180 | 69 |
| 00 11 03 | 149 | 00 21 41 LE | 272 | 09 11 240 | 33 | 13 46 165 | 50 | 25 01 140 | 38 | 30 35 160 | 64 | 41 04 250 | 69 |
| 00 11 04 | 149 | 01 06 160 | 32 | 09 12 240 | 33 | 13 46 165 | 198 | 25 01 160 | 38 | 30 36 160 | 64 | 41 04 300 | 69 |
| 00 11 06 | 149 | 01 06 160 | 196 | 09 12 240 T | 33 | 13 81 200 | 35 | 25 02 140 | 38 | 30 36 160 | 202 | 41 14 250 | 69 |
| 00 11 06 V01 | 149 | 01 06 190 | 32 | 09 12 240 T | 257 | 13 82 200 | 35 | 25 02 160 | 38 | 30 41 160 | 147 | 41 24 225 | 69 |
| 00 11 06 V02 | 150 | 01 06 190 | 196 | 10 98 I220 | 132 | 13 82 200 T | 35 | 25 03 125 | 38 | 31 11 160 | 63 | 41 34 165 | 69 |
| 00 11 07 | 150 | 02 01 180 | 29 | 10 99 I220 | 132 | 13 82 200 T | 257 | 25 05 140 | 38 | 31 15 160 | 63 | 41 44 200 | 69 |
| 00 11 08 | 151 | 02 01 200 | 29 | 11 01 160 | 42 | 13 86 200 | 35 | 25 05 160 | 38 | 31 21 160 | 63 | 42 14 280 | 68 |
| 00 11 17 | 151 | 02 01 225 | 29 | 11 02 160 | 42 | 13 86 200 | 200 | 25 06 160 | 38 | 31 25 160 | 63 | 42 24 280 | 68 |
| 00 11 V50 | 147 | 02 02 180 | 29 | 11 05 160 | 42 | 13 91 200 | 35 | 25 06 160 | 201 | 32 11 135 | 65 | 42 34 280 | 68 |
| 00 19 41 | 260 | 02 02 200 | 29 | 11 06 160 | 42 | 13 92 200 | 35 | 25 21 160 | 38 | 32 21 135 | 65 | 42 44 280 | 68 |
| 00 19 55 S4 | 113 | 02 02 225 | 29 | 11 06 160 | 198 | 13 96 200 | 35 | 25 25 160 | 38 | 32 31 135 | 65 | 44 10 J5 | 78 |
| 00 19 56 | 81 | 02 02 225 T | 29 | 11 07 160 | 42 | 13 96 200 | 200 | 25 26 160 | 38 | 33 01 160 | 65 | 44 10 J6 | 78 |
| 00 19 57 | 81 | 02 02 225 T | 257 | 11 07 160 | 198 | 14 22 160 | 43 | 25 26 160 | 201 | 33 03 160 | 65 | 44 11 J0 | 72 |
| 00 19 72 LE | 260 | 02 05 180 | 29 | 11 12 160 | 42 | 14 25 160 | 43 | 26 11 200 | 39 | 34 12 130 | 244 | 44 11 J1 | 72 |
| 00 19 72 LE | 268 | 02 05 200 | 29 | 11 17 160 | 42 | 14 26 160 | 43 | 26 12 200 | 39 | 34 12 130 ESD | 244 | 44 11 J2 | 72 |
| 00 19 73 LE | 268 | 02 05 225 | 29 | 11 17 160 | 198 | 14 26 160 | 199 | 26 12 200 T | 39 | 34 22 130 | 244 | 44 11 J3 | 72 |
| 00 20 01 V01 | 261 | 02 06 180 | 29 | 11 82 130 | 42 | 15 11 120 | 49 | 26 12 200 T | 257 | 34 22 130 ESD | 244 | 44 11 J4 | 72 |
| 00 20 01 V02 | 81 | 02 06 180 | 196 | 11 92 140 | 43 | 15 19 005 | 49 | 26 13 200 | 39 | 34 32 130 | 244 | 44 13 J0 | 72 |
| 00 20 01 V02 | 261 | 02 06 200 | 29 | 12 11 180 | 45 | 15 19 006 | 49 | 26 15 200 | 39 | 34 32 130 ESD | 244 | 44 13 J1 | 72 |
| 00 20 01 V03 | 261 | 02 06 200 | 196 | 12 12 02 | 45 | 15 19 008 | 49 | 26 15 200 T | 39 | 34 42 130 | 244 | 44 13 J2 | 72 |
| 00 20 01 V09 | 81 | 02 06 225 | 29 | 12 12 06 | 45 | 15 19 010 | 49 | 26 15 200 T | 257 | 34 42 130 ESD | 244 | 44 13 J3 | 72 |
| 00 20 01 V09 | 261 | 02 06 225 | 196 | 12 12 10 | 45 | 15 51 160 | 51 | 26 16 200 | 39 | 34 52 130 | 244 | 44 13 J4 | 72 |
| 00 20 03 SB | 82 | 02 07 200 | 29 | 12 12 11 | 45 | 15 61 160 | 51 | 26 16 200 | 201 | 34 52 130 ESD | 244 | 44 19 J5 | 78 |
| 00 20 03 V02 | 83 | 02 07 200 | 196 | 12 12 12 | 45 | 15 81 160 | 51 | 26 17 200 | 39 | 35 11 115 | 245 | 44 19 J6 | 78 |
| 00 20 04 SB | 82 | 02 07 225 | 29 | 12 12 13 | 45 | 16 20 16 SB | 51 | 26 17 200 | 201 | 35 12 115 | 245 | 44 20 J51 | 78 |
| 00 20 04 V01 | 83 | 02 07 225 | 196 | 12 12 14 | 45 | 16 20 28 SB | 51 | 26 21 200 | 39 | 35 12 115 ESD | 246 | 44 20 J61 | 78 |
| 00 20 09 V01 | 263 | 03 01 140 | 28 | 12 19 02 | 45 | 16 20 165 SB | 51 | 26 22 200 | 39 | 35 21 115 | 245 | 44 21 J01 | 72 |
| 00 20 09 V02 | 263 | 03 01 160 | 28 | 12 19 06 | 45 | 16 29 165 | 51 | 26 22 200 T | 39 | 35 22 115 | 245 | 44 21 J11 | 72 |
| 00 20 09 V03 | 263 | 03 01 180 | 28 | 12 19 10 | 45 | 16 30 135 SB | 52 | 26 22 200 T | 257 | 35 22 115 ESD | 246 | 44 21 J21 | 72 |
| 00 20 10 | 263 | 03 01 200 | 28 | 12 19 11 | 45 | 16 39 135 | 52 | 26 25 200 | 39 | 35 31 115 | 245 | 44 21 J31 | 72 |
| 00 20 11 | 263 | 03 01 250 | 28 | 12 19 12 | 45 | 16 40 150 | 52 | 26 25 200 T | 39 | 35 32 115 | 245 | 44 21 J41 | 72 |
| 00 20 12 | 263 | 03 02 160 | 28 | 12 19 13 | 45 | 16 49 150 | 52 | 26 25 200 T | 257 | 35 32 115 ESD | 246 | 44 23 J11 | 72 |
| 00 20 13 | 263 | 03 02 180 | 28 | 12 19 14 | 45 | 16 60 05 SB | 53 | 26 26 200 | 39 | 35 42 115 | 245 | 44 23 J21 | 72 |
| 00 20 15 | 227 | 03 02 200 | 28 | 12 19 180 | 45 | 16 60 06 SB | 53 | 26 26 200 | 201 | 35 42 115 ESD | 246 | 44 23 J31 | 72 |
| 00 20 16 | 248 | 03 05 140 | 28 | 12 21 180 | 45 | 16 60 100 SB | 54 | 26 27 200 | 39 | 35 52 145 | 245 | 44 29 J51 | 78 |
| 00 20 16 P | 248 | 03 05 160 | 28 | 12 29 180 | 45 | 16 64 125 SB | 54 | 26 27 200 | 201 | 35 62 145 | 245 | 44 29 J61 | 78 |
| 00 20 16 P ESD | 248 | 03 05 180 | 28 | 12 40 200 | 47 | 16 65 125 SB | 54 | 27 01 160 | 37 | 35 72 145 | 245 | 44 31 J02 | 72 |
| 00 20 17 | 248 | 03 05 200 | 28 | 12 42 195 | 46 | 16 80 125 SB | 55 | 28 01 200 | 61 | 35 82 145 | 245 | 44 31 J12 | 72 |
| 00 20 18 | 248 | 03 06 160 | 28 | 12 49 01 | 47 | 16 85 125 SB | 55 | 28 21 200 | 61 | 36 12 130 | 247 | 44 31 J22 | 72 |
| 00 20 18 ESD | 248 | 03 06 160 | 197 | 12 49 02 | 47 | 16 90 130 SB | 55 | 28 71 280 | 62 | 36 22 125 | 247 | 44 31 J32 | 72 |
| 00 20 72 V01 | 260 | 03 06 180 | 28 | 12 49 03 | 47 | 16 95 01 SB | 57 | 28 81 280 | 62 | 36 32 125 | 247 | 44 31 J42 | 72 |
| 00 20 72 V02 | 260 | 03 06 180 | 197 | 12 49 04 | 47 | 19 01 130 | 37 | 29 11 160 | 63 | 37 11 125 | 66 | 45 10 170 | 80 |
| 00 21 01 TL | 264 | 03 06 200 | 28 | 12 49 05 | 47 | 19 03 130 | 37 | 29 21 160 | 63 | 37 13 125 | 66 | 45 21 200 | 80 |
| 00 21 02 LE | 265 | 03 06 200 | 197 | 12 49 21 | 46 | 20 01 125 | 60 | 29 25 160 | 63 | 37 21 125 | 66 | 46 10 100 | 79 |
| 00 21 02 LE | 268 | 03 07 160 | 28 | 12 49 23 | 46 | 20 01 140 | 60 | 30 11 140 | 64 | 37 23 125 | 66 | 46 10 A5 | 78 |
| 00 21 02 SL | 265 | 03 07 160 | 197 | 12 50 200 | 47 | 20 01 160 | 60 | 30 11 160 | 64 | 37 31 125 | 66 | 46 10 A6 | 78 |
| 00 21 05 LE | 270 | 03 07 180 | 28 | 12 59 01 | 47 | 20 01 180 | 60 | 30 11 190 | 64 | 37 33 125 | 66 | 46 11 A0 | 73 |
| 00 21 07 LE | 269 | 03 07 180 | 197 | 12 59 02 | 47 | 20 02 140 | 60 | 30 13 140 | 64 | 37 41 125 | 66 | 46 11 A1 | 73 |
| 00 21 08 LE | 269 | 03 07 200 | 28 | 12 62 180 | 47 | 20 02 160 | 60 | 30 13 160 | 64 | 37 43 125 | 66 | 46 11 A2 | 73 |
| 00 21 10 LE | 269 | 03 07 200 | 197 | 12 64 180 | 48 | 20 05 140 | 60 | 30 15 140 | 64 | 38 11 200 | 67 | 46 11 A3 | 73 |
| 00 21 11 LE | 273 | 03 07 250 | 28 | 12 69 21 | 47 | 20 05 160 | 60 | 30 15 160 | 64 | 38 15 200 | 67 | 46 11 A4 | 73 |
| 00 21 15 | 227 | 03 07 250 | 197 | 12 69 23 | 47 | 20 06 160 | 60 | 30 15 190 | 64 | 38 21 200 | 67 | 46 11 G0 | 80 |
| 00 21 15 LE | 227 | 08 05 110 | 32 | 12 69 31 | 48 | 20 06 160 | 200 | 30 16 160 | 64 | 38 25 200 | 67 | 46 11 G1 | 80 |
| 00 21 15 LE | 227 | 08 21 145 | 31 | 12 80 040 SB | 48 | 22 01 125 | 61 | 30 16 160 | 202 | 38 31 200 | 67 | 46 11 G2 | 80 |
| 00 21 20 | 266 | 08 22 145 | 31 | 12 80 100 SB | 48 | 22 01 140 | 61 | 30 21 140 | 64 | 38 35 200 | 67 | 46 11 G3 | 80 |
| 00 21 20 LE | 266 | 08 22 145 T | 31 | 12 82 130 SB | 49 | 22 01 160 | 61 | 30 21 160 | 64 | 38 41 190 | 67 | 46 11 G4 | 80 |
| 00 21 20 LE | 270 | 08 22 145 T | 257 | 12 85 100 SB | 49 | 22 02 140 | 61 | 30 21 190 | 64 | 38 45 190 | 67 | 46 13 A0 | 73 |
| 00 21 25 | 82 | 08 25 145 | 31 | 13 01 160 | 36 | 22 02 160 | 61 | 30 23 140 | 64 | 38 71 200 | 67 | 46 13 A1 | 73 |
| 00 21 30 | 267 | 08 26 145 | 31 | 13 02 160 | 36 | 22 05 140 | 61 | 30 25 140 | 64 | 38 91 200 | 67 | 46 13 A2 | 73 |
| 00 21 32 LE | 271 | 08 26 145 | 197 | 13 05 160 | 36 | 22 05 160 | 61 | 30 25 160 | 64 | 38 95 200 | 67 | 46 13 A3 | 73 |
| 00 21 35 LE | 273 | 09 01 240 | 33 | 13 05 160 T | 36 | 22 06 160 | 61 | 30 25 190 | 64 | 40 04 180 | 68 | 46 19 A5 | 78 |
| 00 21 40 LE | 271 | 09 02 240 | 33 | 13 05 160 T | 257 | 22 06 160 | 199 | 30 31 160 | 64 | 40 04 250 | 68 | 46 19 A6 | 78 |

| | | | | | | | | | | | | | |
|-----------|----|---------------|-----|-------------|-----|-----------------|-----|----------------|-----|-------------|-----|--------------|-----|
| 46 20 A51 | 78 | 50 01 250 | 86 | 70 07 180 | 94 | 74 05 180 | 99 | 78 03 125 | 235 | 85 59 250 A | 142 | 88 06 250 | 206 |
| 46 20 A61 | 78 | 50 01 300 | 86 | 70 07 180 | 202 | 74 05 200 | 99 | 78 03 125 ESD | 235 | 85 59 250 C | 143 | 88 07 250 | 123 |
| 46 21 A01 | 73 | 51 01 210 | 86 | 70 11 110 | 94 | 74 05 250 | 99 | 78 13 125 | 235 | 86 03 125 | 113 | 88 07 250 | 206 |
| 46 21 A11 | 73 | 55 00 300 | 87 | 70 15 110 | 94 | 74 06 160 | 99 | 78 13 125 ESD | 235 | 86 03 150 | 113 | 88 07 300 | 123 |
| 46 21 A21 | 73 | 58 30 225 | 87 | 70 26 160 | 95 | 74 06 160 | 205 | 78 23 125 | 235 | 86 03 180 | 113 | 88 07 300 | 206 |
| 46 21 A31 | 73 | 61 01 200 | 108 | 70 26 160 | 204 | 74 06 180 | 99 | 78 31 125 | 235 | 86 03 250 | 113 | 89 01 250 | 125 |
| 46 21 A41 | 73 | 61 02 200 | 108 | 71 01 200 | 102 | 74 06 180 | 205 | 78 41 125 | 235 | 86 03 300 | 113 | 89 03 250 | 125 |
| 46 23 A01 | 73 | 62 12 120 | 243 | 71 01 250 | 105 | 74 06 200 | 99 | 78 61 125 | 235 | 86 03 400 | 114 | 89 05 250 | 125 |
| 46 23 A11 | 73 | 64 01 115 | 243 | 71 02 200 | 102 | 74 06 200 | 205 | 78 61 125 ESD | 235 | 86 05 150 | 113 | 90 01 125 | 125 |
| 46 23 A21 | 73 | 64 02 115 | 243 | 71 02 200T | 102 | 74 06 250 | 99 | 78 71 125 | 235 | 86 05 180 | 113 | 90 03 125 | 125 |
| 46 23 A31 | 73 | 64 11 115 | 243 | 71 02 200T | 257 | 74 06 250 | 205 | 78 71 125 ESD | 235 | 86 05 180T | 113 | 90 20 185 | 135 |
| 46 29 A51 | 78 | 64 12 115 | 243 | 71 12 200 | 102 | 74 07 200 | 99 | 78 81 125 | 235 | 86 05 180T | 257 | 90 25 20 | 136 |
| 46 29 A61 | 78 | 64 12 115 ESD | 243 | 71 21 200 | 103 | 74 07 200 | 205 | 78 91 125 | 235 | 86 05 250 | 113 | 90 25 40 | 137 |
| 46 31 A02 | 73 | 64 22 115 | 243 | 71 22 200 | 103 | 74 07 250 | 99 | 79 02 120 | 236 | 86 05 250T | 113 | 90 29 01 | 136 |
| 46 31 A12 | 73 | 64 32 120 | 243 | 71 22 200T | 103 | 74 07 250 | 205 | 79 02 120 ESD | 237 | 86 05 250T | 257 | 90 29 02 | 136 |
| 46 31 A22 | 73 | 64 32 120 ESD | 243 | 71 22 200T | 257 | 74 12 160 | 99 | 79 02 125 | 236 | 86 07 250 | 206 | 90 29 15 | 136 |
| 46 31 A32 | 73 | 64 42 115 | 243 | 71 31 200 | 103 | 74 12 180 | 99 | 79 02 125 ESD | 237 | 87 01 125 | 117 | 90 29 40 | 137 |
| 46 31 A42 | 73 | 64 52 115 | 243 | 71 31 250 | 105 | 74 21 180 | 99 | 79 12 125 | 236 | 87 01 150 | 117 | 90 29 185 | 135 |
| 48 11 J0 | 74 | 64 62 120 | 243 | 71 32 200 | 103 | 74 21 200 | 99 | 79 12 125 ESD | 237 | 87 01 180 | 117 | 90 42 250 | 138 |
| 48 11 J1 | 74 | 64 62 120 ESD | 243 | 71 32 200T | 103 | 74 21 250 | 99 | 79 22 120 | 236 | 87 01 250 | 117 | 90 42 340 | 138 |
| 48 11 J2 | 74 | 64 72 120 | 243 | 71 32 200T | 257 | 74 22 200 | 99 | 79 22 120 ESD | 237 | 87 01 300 | 117 | 90 49 340 | 138 |
| 48 11 J3 | 74 | 67 01 140 | 108 | 71 41 200 | 103 | 74 22 200T | 99 | 79 22 125 | 236 | 87 01 400 | 118 | 90 49 340 M | 138 |
| 48 11 J4 | 74 | 67 01 160 | 108 | 71 72 460 | 106 | 74 22 200T | 257 | 79 22 125 ESD | 237 | 87 01 560 | 118 | 90 55 280 | 138 |
| 48 21 J01 | 74 | 67 01 200 | 108 | 71 72 610 | 106 | 74 22 250 | 99 | 79 32 125 | 236 | 87 02 180 | 117 | 90 59 280 | 138 |
| 48 21 J11 | 74 | 67 05 140 | 108 | 71 72 760 | 106 | 74 22 250T | 99 | 79 32 125 ESD | 237 | 87 02 180T | 117 | 90 61 16 | 139 |
| 48 21 J21 | 74 | 67 05 160 | 108 | 71 72 910 | 106 | 74 22 250T | 257 | 79 42 125 | 236 | 87 02 180T | 257 | 90 61 20 | 139 |
| 48 21 J31 | 74 | 67 05 200 | 108 | 71 79 460 | 106 | 75 02 125 | 238 | 79 42 125 ESD | 237 | 87 02 250 | 117 | 90 70 220 | 144 |
| 48 21 J41 | 74 | 68 01 160 | 87 | 71 79 610 | 106 | 75 12 125 | 238 | 79 42 125Z | 236 | 87 02 250T | 117 | 91 00 200 | 144 |
| 48 31 J0 | 75 | 68 01 160 | 109 | 71 79 760 | 106 | 75 22 125 | 238 | 79 42 125Z ESD | 237 | 87 02 250T | 257 | 91 13 250 | 145 |
| 48 31 J1 | 75 | 68 01 180 | 87 | 71 79 910 | 106 | 75 52 125 | 238 | 79 52 125 | 236 | 87 02 300 | 117 | 91 19 250 01 | 145 |
| 48 31 J2 | 75 | 68 01 180 | 109 | 71 82 950 | 107 | 76 01 125 | 96 | 79 52 125 ESD | 237 | 87 02 300T | 117 | 91 31 180 | 146 |
| 48 31 J3 | 75 | 68 01 200 | 87 | 71 89 950 | 107 | 76 03 125 | 96 | 79 62 125 | 236 | 87 02 300T | 257 | 91 51 160 | 146 |
| 48 41 J01 | 75 | 68 01 200 | 109 | 72 01 140 | 92 | 76 05 125 | 96 | 79 62 125 ESD | 237 | 87 03 125 | 117 | 91 61 160 | 146 |
| 48 41 J11 | 75 | 68 01 280 | 87 | 72 01 160 | 92 | 76 12 125 | 96 | 81 01 250 | 128 | 87 03 180 | 117 | 91 71 160 | 146 |
| 48 41 J21 | 75 | 68 01 280 | 109 | 72 01 180 | 92 | 76 22 125 | 96 | 81 03 250 | 128 | 87 03 250 | 117 | 91 92 180 | 144 |
| 48 41 J31 | 75 | 69 01 130 | 109 | 72 02 125 | 92 | 76 81 125 | 96 | 81 11 250 | 128 | 87 03 300 | 117 | 91 92 180 | 144 |
| 49 11 A0 | 76 | 69 03 130 | 109 | 72 11 160 | 92 | 77 01 115 | 239 | 81 13 250 | 128 | 87 05 250 | 117 | 92 02 53 | 249 |
| 49 11 A1 | 76 | 70 01 110 | 94 | 72 21 160 | 92 | 77 01 130 | 239 | 81 19 230 | 128 | 87 05 300 | 117 | 92 02 54 | 249 |
| 49 11 A2 | 76 | 70 01 125 | 94 | 72 51 160 | 92 | 77 02 115 | 239 | 83 10 010 | 126 | 87 11 250 | 119 | 92 02 55 | 249 |
| 49 11 A3 | 76 | 70 01 140 | 94 | 73 02 160 | 97 | 77 02 115 ESD | 240 | 83 10 015 | 126 | 87 19 250 | 119 | 92 08 78 ESD | 253 |
| 49 11 A4 | 76 | 70 01 160 | 95 | 73 05 160 | 97 | 77 02 120 H | 241 | 83 10 020 | 126 | 87 21 250 | 120 | 92 08 79 ESD | 253 |
| 49 21 A01 | 76 | 70 01 180 | 94 | 73 05 160T | 97 | 77 02 120 H ESD | 241 | 83 10 030 | 126 | 87 21 300 | 120 | 92 12 52 | 249 |
| 49 21 A11 | 76 | 70 02 125 | 94 | 73 05 160T | 257 | 77 02 130 | 239 | 83 10 040 | 126 | 87 22 250 | 120 | 92 22 04 | 249 |
| 49 21 A21 | 76 | 70 02 140 | 94 | 73 06 160 | 97 | 77 02 135 H | 241 | 83 20 010 | 126 | 87 26 250 | 121 | 92 22 06 | 249 |
| 49 21 A31 | 76 | 70 02 160 | 95 | 73 06 160 | 205 | 77 02 135 H ESD | 241 | 83 20 015 | 126 | 87 26 250 | 207 | 92 22 07 | 249 |
| 49 21 A41 | 76 | 70 02 180 | 94 | 73 71 180 | 100 | 77 11 115 | 239 | 83 20 020 | 126 | 87 41 250 | 115 | 92 22 12 | 250 |
| 49 31 A0 | 77 | 70 05 125 | 94 | 73 72 180 | 100 | 77 12 115 | 239 | 83 30 005 | 127 | 87 51 250 | 121 | 92 22 13 | 250 |
| 49 31 A1 | 77 | 70 05 140 | 94 | 73 72 180 F | 100 | 77 12 115 ESD | 240 | 83 30 010 | 127 | 88 01 180 | 123 | 92 22 35 | 250 |
| 49 31 A2 | 77 | 70 05 160 | 95 | 74 01 140 | 99 | 77 21 115 | 239 | 83 30 015 | 127 | 88 01 250 | 123 | 92 23 05 | 249 |
| 49 31 A3 | 77 | 70 05 160T | 95 | 74 01 160 | 99 | 77 21 130 | 239 | 83 30 020 | 127 | 88 01 300 | 123 | 92 24 01 | 249 |
| 49 41 A01 | 77 | 70 05 160T | 257 | 74 01 180 | 99 | 77 22 115 | 239 | 83 30 030 | 127 | 88 01 400 | 124 | 92 24 34 | 250 |
| 49 41 A11 | 77 | 70 05 180 | 94 | 74 01 200 | 99 | 77 22 115 ESD | 240 | 83 60 010 | 127 | 88 02 180 | 123 | 92 27 61 | 208 |
| 49 41 A21 | 77 | 70 05 180T | 94 | 74 01 250 | 99 | 77 22 130 | 239 | 83 60 015 | 127 | 88 02 250 | 123 | 92 27 61 | 252 |
| 49 41 A31 | 77 | 70 05 180T | 257 | 74 02 140 | 99 | 77 32 115 | 239 | 83 60 020 | 127 | 88 02 250T | 123 | 92 27 62 | 208 |
| 50 00 160 | 86 | 70 06 125 | 94 | 74 02 160 | 99 | 77 32 115 ESD | 240 | 83 61 010 | 127 | 88 02 250T | 257 | 92 27 62 | 252 |
| 50 00 180 | 86 | 70 06 125 | 202 | 74 02 180 | 99 | 77 32 120 H | 241 | 83 61 015 | 127 | 88 02 300 | 123 | 92 28 69 ESD | 253 |
| 50 00 210 | 86 | 70 06 140 | 94 | 74 02 200 | 99 | 77 32 120 H ESD | 241 | 83 61 020 | 127 | 88 02 300T | 123 | 92 28 70 ESD | 253 |
| 50 00 225 | 86 | 70 06 140 | 202 | 74 02 200T | 99 | 77 42 115 | 239 | 84 11 200 | 139 | 88 02 300T | 257 | 92 28 71 ESD | 253 |
| 50 00 250 | 86 | 70 06 160 | 95 | 74 02 200T | 257 | 77 42 115 ESD | 240 | 84 21 200 | 139 | 88 03 180 | 123 | 92 28 72 ESD | 253 |
| 50 00 300 | 86 | 70 06 160 | 204 | 74 02 250 | 99 | 77 42 130 | 239 | 85 01 250 | 115 | 88 03 250 | 123 | 92 32 29 | 250 |
| 50 01 160 | 86 | 70 06 180 | 94 | 74 02 250T | 99 | 77 52 115 | 239 | 85 51 250 A | 141 | 88 05 180 | 123 | 92 34 28 | 250 |
| 50 01 180 | 86 | 70 06 180 | 202 | 74 02 250T | 257 | 77 52 115 ESD | 240 | 85 51 250 AF | 142 | 88 05 250 | 123 | 92 34 36 | 250 |
| 50 01 210 | 86 | 70 07 160 | 95 | 74 05 140 | 99 | 77 72 115 | 239 | 85 51 250 C | 143 | 88 05 300 | 123 | 92 34 37 | 250 |
| 50 01 225 | 86 | 70 07 160 | 204 | 74 05 160 | 99 | 77 72 115 ESD | 240 | 85 59 250 A | 141 | 88 06 250 | 123 | 92 37 64 | 208 |

| | | | | | | | | | | | | | |
|--------------|-----|----------------|-----|-------------|-----|--------------|-----|-----------|-----|-------------|-----|-------------|-----|
| 92 37 64 | 252 | 95 36 250 | 158 | 97 43 E US | 171 | 97 49 94 | 178 | 97 90 21 | 187 | 97 99 333 | 191 | 98 01 11 | 215 |
| 92 38 75 ESD | 253 | 95 36 250 | 211 | 97 49 04 | 172 | 97 49 94 | 179 | 97 90 22 | 187 | 97 99 334 | 191 | 98 01 12 | 215 |
| 92 44 42 | 251 | 95 36 280 | 158 | 97 49 05 | 172 | 97 49 95 | 174 | 97 90 23 | 186 | 97 99 335 | 191 | 98 01 13 | 215 |
| 92 52 23 | 250 | 95 36 280 | 211 | 97 49 06 | 172 | 97 49 95 | 178 | 97 90 24 | 186 | 97 99 336 | 191 | 98 01 14 | 215 |
| 92 58 74 ESD | 253 | 95 36 315 A | 160 | 97 49 07 | 172 | 97 49 95 | 179 | 97 90 25 | 187 | 97 99 337 | 191 | 98 01 15 | 215 |
| 92 64 43 | 251 | 95 36 315 A | 212 | 97 49 08 | 172 | 97 50 01 | 176 | 97 90 26 | 188 | 97 99 338 | 191 | 98 01 16 | 215 |
| 92 64 44 | 251 | 95 36 320 | 159 | 97 49 09 | 172 | 97 51 10 | 176 | 97 91 01 | 174 | 97 99 339 | 191 | 98 01 17 | 215 |
| 92 67 63 | 208 | 95 36 320 | 212 | 97 49 10 | 172 | 97 51 12 | 177 | 97 91 02 | 175 | 97 99 350 | 191 | 98 01 18 | 215 |
| 92 67 63 | 252 | 95 39 038 | 161 | 97 49 11 | 172 | 97 52 04 | 178 | 97 99 001 | 189 | 97 99 351 | 191 | 98 01 19 | 215 |
| 92 69 84 | 251 | 95 39 250 | 158 | 97 49 14 | 172 | 97 52 05 | 178 | 97 99 010 | 189 | 97 99 352 | 191 | 98 01 22 | 215 |
| 92 70 46 | 251 | 95 39 250 | 211 | 97 49 15 | 172 | 97 52 06 | 178 | 97 99 011 | 189 | 97 99 353 | 191 | 98 01 24 | 215 |
| 92 72 45 | 251 | 95 39 280 | 158 | 97 49 16 | 172 | 97 52 08 | 178 | 97 99 020 | 189 | 97 99 354 | 191 | 98 03 04 | 215 |
| 92 78 77 ESD | 253 | 95 39 280 | 211 | 97 49 18 | 172 | 97 52 09 | 178 | 97 99 021 | 189 | 97 99 355 | 191 | 98 03 05 | 215 |
| 92 84 18 | 251 | 95 39 315 A 01 | 160 | 97 49 19 | 172 | 97 52 10 | 178 | 97 99 022 | 189 | 97 99 356 | 191 | 98 03 06 | 215 |
| 92 88 73 ESD | 253 | 95 39 315 A 01 | 212 | 97 49 20 | 172 | 97 52 13 | 178 | 97 99 030 | 189 | 97 99 357 | 191 | 98 03 07 | 215 |
| 92 94 91 | 252 | 95 39 315 A 02 | 160 | 97 49 23 | 172 | 97 52 14 | 177 | 97 99 050 | 189 | 97 99 358 | 191 | 98 03 08 | 215 |
| 92 95 89 | 252 | 95 39 315 A 02 | 212 | 97 49 24 | 172 | 97 52 19 | 178 | 97 99 060 | 189 | 97 99 359 | 191 | 98 03 09 | 215 |
| 92 95 90 | 252 | 95 39 320 01 | 159 | 97 49 25 | 172 | 97 52 20 | 177 | 97 99 070 | 189 | 97 99 370 | 191 | 98 03 10 | 215 |
| 94 10 185 | 137 | 95 39 320 01 | 212 | 97 49 25 1 | 174 | 97 52 23 | 178 | 97 99 071 | 189 | 97 99 371 | 191 | 98 03 11 | 215 |
| 94 15 215 | 133 | 95 39 320 02 | 159 | 97 49 26 | 173 | 97 52 30 | 179 | 97 99 090 | 189 | 97 99 372 | 191 | 98 03 12 | 215 |
| 94 19 185 | 137 | 95 39 320 02 | 212 | 97 49 26 1 | 174 | 97 52 33 | 179 | 97 99 091 | 189 | 97 99 373 | 191 | 98 03 13 | 215 |
| 94 19 215 | 133 | 95 39 720 | 161 | 97 49 27 | 173 | 97 52 34 | 179 | 97 99 092 | 189 | 97 99 374 | 191 | 98 03 055 | 215 |
| 94 19 215 | 133 | 95 39 870 | 161 | 97 49 27 1 | 174 | 97 52 35 | 179 | 97 99 110 | 189 | 97 99 375 | 191 | 98 04 08 | 216 |
| 94 35 215 | 133 | 95 41 165 | 154 | 97 49 30 | 173 | 97 52 36 | 179 | 97 99 111 | 189 | 97 99 376 | 191 | 98 04 10 | 216 |
| 95 02 21 | 134 | 95 61 150 | 163 | 97 49 35 | 173 | 97 52 37 | 179 | 97 99 112 | 189 | 97 99 377 | 191 | 98 04 13 | 216 |
| 95 03 160 SB | 134 | 95 61 190 | 162 | 97 49 40 | 173 | 97 52 38 | 179 | 97 99 130 | 189 | 97 99 378 | 191 | 98 04 17 | 216 |
| 95 05 140 | 135 | 95 62 190 | 162 | 97 49 44 | 173 | 97 52 50 | 179 | 97 99 131 | 189 | 97 99 390 | 191 | 98 04 19 | 216 |
| 95 05 155 SB | 156 | 95 62 190 T | 162 | 97 49 50 | 173 | 97 52 63 | 181 | 97 99 150 | 189 | 97 99 391 | 191 | 98 04 22 | 216 |
| 95 05 165 | 156 | 95 62 190 T | 257 | 97 49 54 | 173 | 97 52 63 DG | 181 | 97 99 151 | 189 | 97 99 392 | 191 | 98 05 13 | 216 |
| 95 05 185 | 135 | 95 71 445 | 163 | 97 49 59 | 173 | 97 52 64 | 181 | 97 99 170 | 190 | 97 99 393 | 191 | 98 05 17 | 216 |
| 95 05 190 | 135 | 95 71 600 | 163 | 97 49 59 1 | 174 | 97 52 65 | 181 | 97 99 171 | 190 | 97 99 394 | 191 | 98 05 19 | 216 |
| 95 06 230 | 156 | 95 77 600 | 163 | 97 49 60 | 173 | 97 52 65 A | 181 | 97 99 172 | 190 | 97 99 395 | 191 | 98 07 250 | 214 |
| 95 06 230 | 208 | 95 77 600 | 213 | 97 49 61 | 173 | 97 52 65 DG | 181 | 97 99 173 | 190 | 97 99 396 | 191 | 98 13 20 | 216 |
| 95 11 165 | 154 | 95 79 445 | 163 | 97 49 62 | 173 | 97 52 65 DGA | 181 | 97 99 174 | 190 | 97 99 397 | 191 | 98 13 25 | 216 |
| 95 11 200 | 155 | 95 79 600 | 163 | 97 49 63 | 173 | 97 53 04 | 182 | 97 99 175 | 190 | 97 99 398 | 191 | 98 13 30 | 216 |
| 95 12 165 | 154 | 95 79 600 | 213 | 97 49 64 | 173 | 97 53 08 | 183 | 97 99 176 | 190 | 97 99 399 | 191 | 98 13 40 | 216 |
| 95 12 165 T | 154 | 95 81 600 | 163 | 97 49 65 | 173 | 97 53 09 | 183 | 97 99 177 | 190 | 98 00 1/2" | 214 | 98 13 50 | 216 |
| 95 12 165 T | 257 | 95 89 600 | 163 | 97 49 65 1 | 174 | 97 53 14 | 182 | 97 99 178 | 190 | 98 00 1/4" | 214 | 98 13 60 | 216 |
| 95 12 200 | 155 | 97 00 215 A | 166 | 97 49 65 2 | 175 | 97 54 24 | 184 | 97 99 179 | 190 | 98 00 3/4" | 214 | 98 14 05 | 216 |
| 95 12 500 | 157 | 97 21 215 | 166 | 97 49 66 | 173 | 97 54 25 | 184 | 97 99 180 | 190 | 98 00 3/8" | 214 | 98 14 06 | 216 |
| 95 16 165 | 154 | 97 21 215 B | 166 | 97 49 66 1 | 174 | 97 54 26 | 184 | 97 99 210 | 190 | 98 00 5/8" | 214 | 98 14 08 | 216 |
| 95 16 165 | 209 | 97 21 215 C | 166 | 97 49 66 2 | 175 | 97 54 27 | 184 | 97 99 211 | 190 | 98 00 5/16" | 214 | 98 15 05 | 216 |
| 95 16 200 | 155 | 97 22 240 | 166 | 97 49 66 4 | 173 | 97 59 06 | 176 | 97 99 212 | 190 | 98 00 07 | 214 | 98 15 06 | 216 |
| 95 16 200 | 210 | 97 32 240 | 166 | 97 49 66 6 | 173 | 97 59 12 | 177 | 97 99 213 | 190 | 98 00 7/16" | 214 | 98 15 08 | 216 |
| 95 17 200 | 155 | 97 33 01 | 169 | 97 49 67 | 173 | 97 59 14 | 177 | 97 99 214 | 190 | 98 00 08 | 214 | 98 20 10 | 217 |
| 95 17 200 | 210 | 97 33 02 | 169 | 97 49 68 | 173 | 97 59 65 2 | 181 | 97 99 215 | 190 | 98 00 09 | 214 | 98 20 25 | 217 |
| 95 17 500 | 157 | 97 39 05 | 169 | 97 49 68 1 | 174 | 97 61 145 A | 184 | 97 99 216 | 190 | 98 00 9/16" | 214 | 98 20 30 | 217 |
| 95 17 500 | 210 | 97 39 06 | 169 | 97 49 69 1 | 173 | 97 61 145 F | 184 | 97 99 217 | 190 | 98 00 10 | 214 | 98 20 35 | 217 |
| 95 21 165 | 154 | 97 39 08 | 169 | 97 49 69 2 | 173 | 97 62 145 A | 184 | 97 99 218 | 190 | 98 00 11 | 214 | 98 20 35 SL | 217 |
| 95 21 600 | 157 | 97 39 09 | 169 | 97 49 69 11 | 174 | 97 68 145 A | 184 | 97 99 219 | 190 | 98 00 12 | 214 | 98 20 40 | 217 |
| 95 22 165 | 154 | 97 39 13 | 169 | 97 49 70 | 173 | 97 68 145 A | 213 | 97 99 220 | 190 | 98 00 13 | 214 | 98 20 40 SL | 217 |
| 95 26 165 | 154 | 97 39 13 A | 169 | 97 49 71 | 173 | 97 71 180 | 185 | 97 99 250 | 190 | 98 00 14 | 214 | 98 20 55 | 217 |
| 95 26 165 | 209 | 97 39 30 | 169 | 97 49 71 1 | 174 | 97 72 180 | 185 | 97 99 251 | 190 | 98 00 15 | 214 | 98 20 55 SL | 217 |
| 95 27 600 | 157 | 97 39 90 | 169 | 97 49 72 | 173 | 97 78 180 | 185 | 97 99 252 | 190 | 98 00 16 | 214 | 98 20 65 | 217 |
| 95 27 600 | 211 | 97 40 10 | 167 | 97 49 74 | 174 | 97 78 180 | 213 | 97 99 270 | 190 | 98 00 17 | 214 | 98 20 65 SL | 217 |
| 95 29 600 | 157 | 97 40 20 SB | 176 | 97 49 76 | 174 | 97 81 180 | 185 | 97 99 271 | 190 | 98 00 18 | 214 | 98 20 80 | 217 |
| 95 29 600 | 211 | 97 43 05 | 170 | 97 49 81 | 174 | 97 90 00 | 187 | 97 99 272 | 190 | 98 00 19 | 214 | 98 21 45 | 217 |
| 95 31 250 | 158 | 97 43 06 | 170 | 97 49 82 | 174 | 97 90 00 LE | 186 | 97 99 290 | 190 | 98 00 22 | 214 | 98 24 00 | 217 |
| 95 31 280 | 158 | 97 43 200 | 170 | 97 49 83 | 174 | 97 90 00 LE | 188 | 97 99 291 | 190 | 98 00 24 | 214 | 98 24 01 | 217 |
| 95 32 038 | 161 | 97 43 200 A | 170 | 97 49 84 | 174 | 97 90 05 | 186 | 97 99 292 | 190 | 98 00 27 | 214 | 98 24 01 SL | 218 |
| 95 32 060 | 161 | 97 43 E | 171 | 97 49 87 | 174 | 97 90 06 | 186 | 97 99 293 | 190 | 98 01 07 | 215 | 98 24 02 | 217 |
| 95 32 100 | 161 | 97 43 E 01 | 171 | 97 49 90 | 174 | 97 90 09 | 186 | 97 99 330 | 191 | 98 01 08 | 215 | 98 24 02 SL | 218 |
| 95 32 315 A | 160 | 97 43 E AUS | 171 | 97 49 93 | 174 | 97 90 10 | 186 | 97 99 331 | 191 | 98 01 09 | 215 | 98 24 03 | 217 |
| 95 32 320 | 159 | 97 43 E UK | 171 | 97 49 94 | 174 | 97 90 12 | 186 | 97 99 332 | 191 | 98 01 10 | 215 | 98 24 04 | 217 |

| | | | |
|--------------|-----|---------------|-----|
| 98 25 00 | 218 | 98 52 | 222 |
| 98 25 01 | 218 | 98 53 03 | 223 |
| 98 25 01 SL | 218 | 98 53 13 | 223 |
| 98 25 02 | 218 | 98 54 | 222 |
| 98 25 02 SL | 218 | 98 55 | 223 |
| 98 25 03 | 218 | 98 56 | 223 |
| 98 25 04 | 218 | 98 56 09 | 223 |
| 98 26 10 | 219 | 98 56 5B | 223 |
| 98 26 15 | 219 | 98 62 01 | 224 |
| 98 26 20 | 219 | 98 62 02 | 224 |
| 98 26 25 | 219 | 98 64 02 | 224 |
| 98 26 30 | 219 | 98 65 01 | 225 |
| 98 30 | 219 | 98 65 02 | 225 |
| 98 31 | 219 | 98 65 03 | 225 |
| 98 33 25 | 222 | 98 65 10 | 225 |
| 98 33 50 | 222 | 98 65 20 | 225 |
| 98 35 125 | 220 | 98 65 30 | 225 |
| 98 35 250 | 220 | 98 65 40 | 225 |
| 98 37 1/2" | 221 | 98 65 41 | 225 |
| 98 37 3/4" | 221 | 98 65 42 | 225 |
| 98 37 3/8" | 221 | 98 67 05 | 225 |
| 98 37 5/8" | 221 | 98 67 10 | 225 |
| 98 37 5/16" | 221 | 98 67 15 | 225 |
| 98 37 7/16" | 221 | 98 67 20 | 225 |
| 98 37 9/16" | 221 | 98 67 25 | 225 |
| 98 37 10 | 220 | 98 90 | 226 |
| 98 37 11 | 220 | 98 99 11 | 226 |
| 98 37 12 | 220 | 98 99 12 | 228 |
| 98 37 13 | 220 | 98 99 13 | 229 |
| 98 37 14 | 220 | 98 99 14 | 231 |
| 98 37 16 | 220 | 98 99 14 LE | 231 |
| 98 37 17 | 220 | 99 00 200 | 88 |
| 98 37 19 | 220 | 99 00 220 | 88 |
| 98 39 05 | 221 | 99 00 220 K12 | 88 |
| 98 39 06 | 221 | 99 00 250 | 88 |
| 98 39 08 | 221 | 99 00 280 | 88 |
| 98 40 | 219 | 99 00 300 | 88 |
| 98 41 | 219 | 99 01 200 | 88 |
| 98 42 | 222 | 99 01 220 | 88 |
| 98 43 50 | 222 | 99 01 250 | 88 |
| 98 45 125 | 220 | 99 01 280 | 88 |
| 98 45 250 | 220 | 99 01 300 | 88 |
| 98 47 1" | 221 | 99 04 220 | 88 |
| 98 47 1/2" | 221 | 99 04 250 | 88 |
| 98 47 3/4" | 221 | 99 04 280 | 88 |
| 98 47 5/8" | 221 | 99 10 250 | 89 |
| 98 47 7/8" | 221 | 99 10 300 | 89 |
| 98 47 9/16" | 221 | 99 11 250 | 89 |
| 98 47 10 | 220 | 99 11 300 | 89 |
| 98 47 11 | 220 | 99 14 250 | 89 |
| 98 47 11/16" | 221 | 99 14 300 | 89 |
| 98 47 12 | 220 | | |
| 98 47 13 | 220 | | |
| 98 47 14 | 220 | | |
| 98 47 16 | 220 | | |
| 98 47 17 | 220 | | |
| 98 47 18 | 220 | | |
| 98 47 19 | 220 | | |
| 98 47 22 | 220 | | |
| 98 47 24 | 220 | | |
| 98 47 27 | 220 | | |
| 98 49 05 | 221 | | |
| 98 49 06 | 221 | | |
| 98 49 08 | 221 | | |

| | | | |
|---|----------|--|-------------|
| Adjustable Wrench, insulated..... | 214 | Diagonal Cutters | 94, 202 |
| Alligator®..... | 122, 206 | Diagonal Cutters for electromechanics | 96 |
| Alligator® Set..... | 262 | Diagonal Cutters for plastics..... | 92 |
| Alligator® XL..... | 124 | Diagonal Insulation Strippers | 43, 199 |
| Automatic Insulation Stripper | 47 | Dismantling Pliers..... | 50, 198 |
| Automatic Insulation Stripper for flat cable | 48 | Dismantling Tools..... | 51, 223 |
| Battery for KNIPEX eCrimp | 171 | Dismantling Tool for building and industrial cables..... | 55 |
| Belt Pouch..... | 268 | Dismantling Tool for data cables | 54 |
| Big Twin | 271 | Dismantling Tool for flat and round cables | 54 |
| BigTwin Move | 272 | Duckbill Pliers | 65 |
| Bolt Cutters..... | 106 | Ear Clamp Pliers..... | 132 |
| Bolt End Cutting Nippers | 108 | eCrimp..... | 171 |
| Bowden Cable Cutter | 163 | Electricians' Gloves..... | 225 |
| Box Wrenches, insulated..... | 215 | Electricians' Shears..... | 156 |
| Brick Pincer | 87 | Electricians' Pliers..... | 36 |
| Cable Connectors..... | 189 | Electronic <i>Super Knips</i> ® / ESD | 234 |
| Cable Cutters (ratchet action)..... | 158, 211 | Electronics Diagonal Cutters | 238 |
| Cable Knives, insulated..... | 222 | Electronics End Cutting Nippers / ESD..... | 242 |
| Cable Shears..... | 154, 208 | Electronics Mounting Pliers..... | 247 |
| Cable Shears (ratchet action)..... | 161 | Electronics Oblique Cutting Nipper | 243 |
| Cable Shears with twin cutting edge..... | 155, 210 | Electronics Pliers | 245 |
| Carpenters' Pincers | 86 | Electronics Pliers / ESD | 246 |
| Circlip Pliers for grip rings on shafts..... | 80 | Electronics Pliers Sets | 248 |
| Circlip Pliers for large external circlips | 78 | Electronics Wire Stripper..... | 43 |
| Circlip Pliers for large internal circlips..... | 78 | Electronics Wire Stripping Shears | 42 |
| Circlip Pliers Sets..... | 81 | End Cutting Nippers..... | 87, 109 |
| Circlip Pliers to assemble external circlips on shafts..... | 73 | End Cutting Nippers for mechanics | 109 |
| Circlip Pliers to assemble internal circlips into bores | 72 | ErgoStrip® – Universal Dismantling Tool..... | 56 |
| Circlip Tool..... | 79 | Extension Bars, insulated | 220 |
| CoBolt® | 102 | Farriers' Pincers..... | 87 |
| CoBolt XL® | 104 | Flat Nose Grozing Pliers..... | 146 |
| Cobra®..... | 116, 207 | Flat Nose Pliers | 60, 200 |
| Cobra® ES..... | 121 | Flat Nose Pliers of plastic..... | 224 |
| Cobra®...matic | 119 | Flat Nose Pliers with cutting edges | 37 |
| Cobra® QuickSet | 120 | Four-Mandrel Crimping Pliers for turned contacts | 180 |
| Cobra® XL / XXL..... | 118 | Glass Breaking Pincer | 146 |
| Combination Pliers | 28, 196 | Glass Nibbling Pincers | 146 |
| Combination Shears | 135 | Grip Pliers | 69 |
| Compact Bolt Cutters | 102 | Gripping Pliers | 63 |
| Compact Diagonal Cutters..... | 97, 205 | Gripping Pliers for precision mechanics | 66 |
| Compression Tool for Coax connectors..... | 176 | Halogen Bulb Exchange Pliers..... | 147 |
| Concrete Mesh Cutter | 107 | Hammerhead Style Carpenters' Pincers | 86 |
| Concreters' Nippers..... | 88 | Hexagon Sockets, insulated | 220 |
| Connector Pliers..... | 128 | High Leverage Centre Cutters | 101 |
| Control Cabinet Keys..... | 149 | High Leverage Combination Pliers..... | 29, 196 |
| Crimp Assortments..... | 186 | High Leverage Concreters' Nippers | 89 |
| Crimp Grip Pliers | 166 | High Leverage Diagonal Cutters..... | 98, 205 |
| Crimp System Pliers..... | 170 | High Leverage End Cutting Nippers..... | 108 |
| Crimping Dies | 172 | Hose Clamp Pliers for Click clamps | 143 |
| Crimping Pliers..... | 166 | Insertion tool..... | 167 |
| Crimping Pliers also for two-hand operation | 178 | Insulated tools | 192 |
| Crimping Pliers for end sleeves | 184, 213 | Insulating Clamp..... | 224 |
| Crimping Pliers for micro plugs | 184 | Insulating Mats | 225 |
| Crimping pliers for Photovoltaics | 170 | Insulation Stripper, automatic | 46 |
| Crimping Pliers for Scotchlok connectors..... | 176 | Insulation Strippers..... | 42, 51, 198 |
| Crimping Pliers for Western plugs | 177 | Insulation Strippers with shaped blades | 45 |
| Crimping Pliers short design | 177 | Jewellers' Pliers..... | 37 |
| Cutter for ribbon cable | 133 | Lineman's Pliers | 33 |
| Cycle Pliers..... | 139 | Locator | 174 |
| Diagonal Cutter for fibre optics..... | 92 | Long Nose Pliers | 64, 202 |

| | | | |
|--|----------|--|--------------|
| Long Reach Needle Nose Pliers..... | 61 | Slip-On Caps..... | 225 |
| Long Reach Needle Nose Pliers with transverse profiles..... | 62 | Smart Grip®..... | 115 |
| Magnetic LED Lamp..... | 147 | Snipe Nose Pliers with centre cutter (Telephone Pliers)..... | 37 |
| Mechanics' Pliers..... | 67 | Snipe Nose Side Cutting Pliers..... | 38, 201 |
| Mini Stripping Tool..... | 48 | Solar Tools..... | 44, 170, 174 |
| Mitre Shears for plastic and rubber sections..... | 133 | Special Retaining Ring Pliers for retaining rings on shafts..... | 80 |
| Mounting Tool for MC3 connectors..... | 175 | Spring Hose Clamp Pliers..... | 140 |
| MultiCrimp®..... | 168 | Spring Hose Clamp Pliers with retainer..... | 142 |
| MultiStrip 10..... | 46 | Stand Mats..... | 225 |
| Multiple Slip Joint Spanner..... | 115 | Steel Fixers' Nippers..... | 88 |
| Needle-Nose Pliers..... | 63 | Stork Beak Pliers..... | 39, 201 |
| Needle-Nose Combination Pliers..... | 30, 197 | Stripping Tool for coax cables..... | 53 |
| Notching Pliers..... | 139 | Stripping Tool for fibre optics..... | 49 |
| Nut Drivers..... | 215 | Stripping Tweezers for Coated Wire..... | 49 |
| Open End Wrenches, insulated..... | 214 | Tear-off Pliers for vehicle bodywork..... | 87 |
| Parrot Beak Pincer..... | 144 | Telephone Pliers..... | 37, 63 |
| Pen-Style Control Cabinet Key..... | 150 | Tether attachment point..... | 254 |
| Pipe Cutter for composite and plastic pipes..... | 137 | T-handle, insulated..... | 219 |
| Pipe Cutter for composite pipes and protective tubes..... | 136 | Tile Breaking Pliers..... | 145 |
| Pipe Cutter for plastic conduit pipes and hoses..... | 135 | Tile Nibbling Pincer..... | 144 |
| Pipe Cutter for plastic pipes..... | 137 | Tool bags and tool cases..... | 258 |
| Pipe Gripping Pliers..... | 126 | Tool Case for Photovoltaics..... | 174 |
| Pipe Wrenches..... | 126 | Tool Case for Photovoltaics MC3..... | 175 |
| Plastic Tweezers..... | 251 | Tool kits..... | 262 |
| Pliers for Electrical Installation..... | 34, 200 | Tools for Photovoltaics..... | 44, 170, 174 |
| Pliers Sets..... | 262 | Torque Wrenches, insulated..... | 222 |
| Pliers Sets in a foam tray..... | 81, 261 | Tower Pincers..... | 88 |
| Pliers Wrench XL..... | 114 | Tweezers..... | 208, 249 |
| Pliers Wrench, insulated..... | 206 | TwinForce®..... | 100 |
| Pliers Wrenches..... | 112 | TwinKey®..... | 148 |
| Potters' Pincers..... | 87 | Universal Dismantling Tools..... | 55 |
| PreciForce®..... | 179 | Universal Grip Pliers..... | 68 |
| Precision Circlip Pliers Sets..... | 82 | Universal Key..... | 149 |
| Precision Circlip Pliers to assemble external circlips on shafts..... | 76 | Upholstery pliers..... | 144 |
| Precision Circlip Pliers to assemble internal circlips into bores..... | 74 | VDE-Tools..... | 192 |
| Precision Electronics Diagonal Cutters / ESD..... | 236 | VDE-Sets..... | 263 |
| Precision Electronics Gripping Pliers / ESD..... | 244 | VDE Tool Case..... | 226 |
| Precision Insulation Strippers..... | 44 | Vinyl Shears..... | 134 |
| Precision Mechanics Pliers..... | 37 | Water Pump Pliers..... | 125 |
| Precision Tweezers..... | 208, 249 | Water Pump Pliers with groove joint..... | 125 |
| Profi-Key..... | 149 | Welding Grip Pliers..... | 68 |
| PUK® Junior Hacksaw..... | 226 | Wire Rope Shears..... | 162, 213 |
| Punch Lock Riveters..... | 138 | Wire Stripper for fibre optics..... | 49 |
| Radio Pliers..... | 38, 201 | Wire stripping tool for coax and data cable..... | 53 |
| Relay Adjusting Pliers..... | 65 | X-Cut®..... | 97, 205 |
| Reversible Ratchet, insulated..... | 222 | | |
| Reversible Ratchets, insulated..... | 219 | | |
| Revolving Punch Pliers..... | 144 | | |
| Round Nose Pliers..... | 61, 199 | | |
| Round Nose Pliers with cutting edge..... | 37 | | |
| Screwdrivers..... | 216 | | |
| Self-Adjusting Crimping Pliers..... | 182 | | |
| Self-Adjusting Insulation Strippers..... | 47 | | |
| Set of Mounting Tools for solar cable connectors MC4..... | 175 | | |
| Set of pliers in a foam tray..... | 81 | | |
| Set of pliers wrenches..... | 113 | | |
| Shears for KEVLAR® fibres..... | 134 | | |
| Sheet Metal Nibbler..... | 138 | | |
| Siphon Pliers..... | 128 | | |

It is not permissible to copy the catalogue or parts of it in any way without our approval.

Subject to model modifications and technical changes.


Illustrations, dimensions and weights are just approximate. No liability is assumed for misprints or errors.

Printed in the Federal Republic of Germany.

KNIPEX-Werk C. Gustav Putsch KG 2016

BASIC SHAPES OF THE JAWS


flat jaws



half-round jaws



round jaws




Cutting Pliers
for cutting or nipping (diagonal, centre and end cutters, carpenters' pincers etc.)




Gripping Pliers
(flat-, long-nose and water pump pliers etc.)

JOINT CONNECTIONS




Forged-in joint axle

The rivet is part of one handle (forged from one piece)
 • high stability for highest strain
 • long service life



Joint with inserted rivet

A proved, sturdy and precise rivet connection for all standard pliers.



Bolted joint

For particularly demanding requirements in terms of precision and smooth operation, e.g. in circlip pliers and cable shears (even the finest multi-stranded conductors have to be cut cleanly).



Combined Pliers
for cutting and gripping (combination, stork beak and radio pliers etc.)




Special Pliers
for special applications, e.g. notching or punching different types of materials (sheet-metal nibbler, tile nibbling pincers etc.)

TYPES OF JOINTS


Lap joint

The two plier halves lie on top of each other but are not milled out.





Single joint

Half the thickness in each pliers handle is milled away in the joint area so that both handles can be laid into each other.




Box joint

One handle on the pliers is slit. The other handle is pushed through this slot. This joint connection can withstand a high level of load and strain because the joint bolt is supported on both sides and the inside handle is guided on both sides.

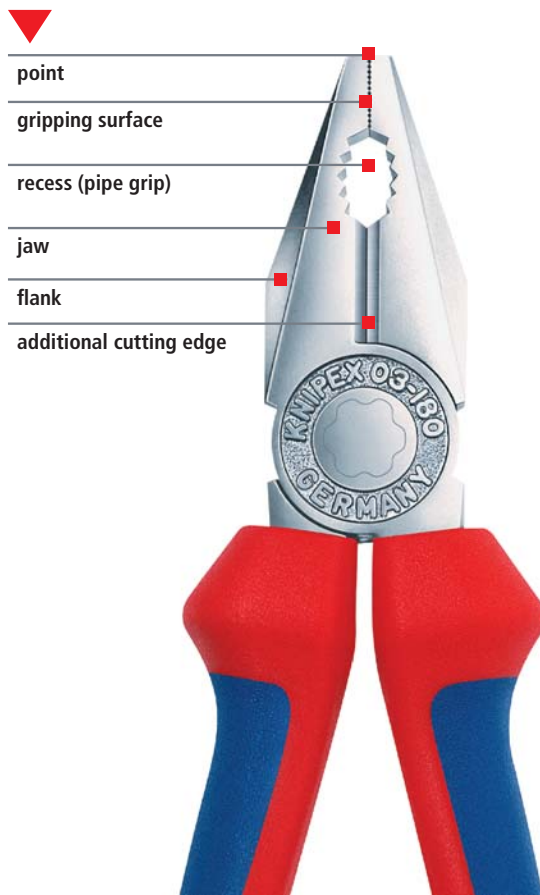



Safety instruction


- Each tool should only be used for its specified purpose.
- When using cutting pliers: beware of wire ends flying off. Wear protective goggles and – if needed – gloves. Be aware of bystanders!
- Only handles marked with the symbol  1000V are insulating.




Care Tips

A drop of oil on polished surfaces and in the joint will keep the tool in good working order and will increase the service life of your pliers.



The maximum values always indicate the performance limit under the most favourable cutting conditions, when the wire is placed as near as possible to the joint.

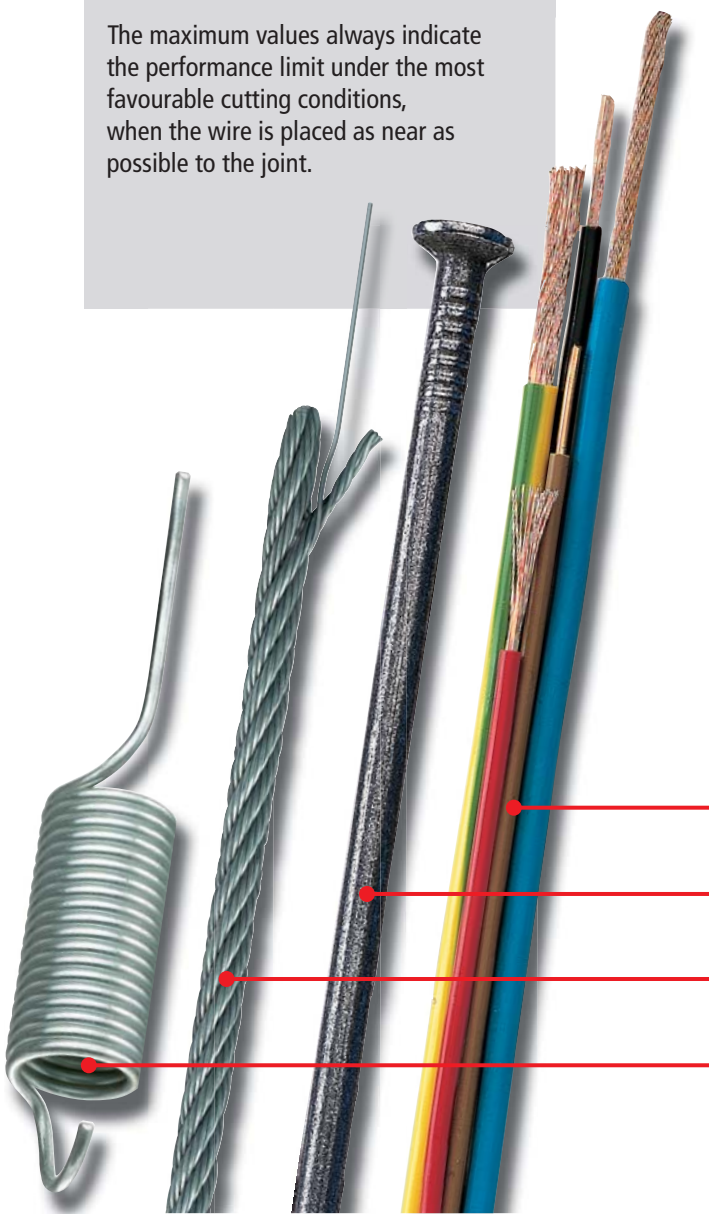


Direction and position of cutting edges




End Cutting Nipper



Oblique Cutter




Diagonal Cutter





Centre Cutter





Cutting edge shapes DIN ISO 5742





with bevel
(outside bevel)





with small bevel
(outside bevel)



with very small bevel
(outside bevel)







without bevel
(outside bevel)



flush cut




WIRE CLASSES







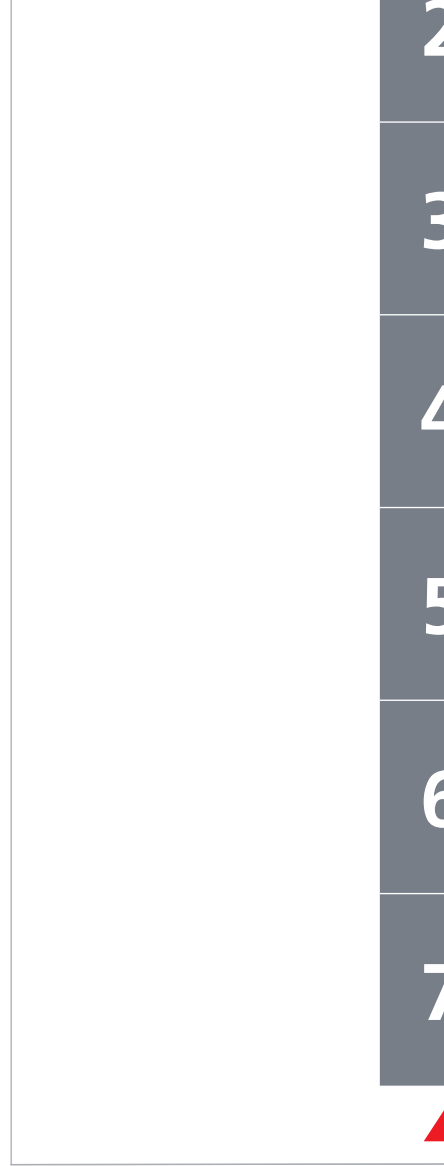

| | Material examples | Type of wire | Tensile strength | |
|---|------------------------------|--------------|-------------------|--------------------|
| | | | N/mm ² | kp/mm ² |
|  | Copper, plastics | soft | 220 | 22 |
|  | Nail, wire pin | medium-hard | 750 | 75 |
|  | Wire rope strand, steel wire | hard | 1800 | 180 |
|  | Spring steel wire | piano wire | 2300 | 230 |

STRUCTURE OF THE ARTICLE NUMBER

| Basic model e.g.: Combination Pliers | Style e.g.: straight | Finish e.g.: head polished, handles black atramentized | Length e.g.: 180 mm |
|---|----------------------------|--|---------------------------|
| 03 | 0 | 1 | 180 |



HEAD/HANDLES

| | | |
|----------|---|---|
| 0 | Pliers black atramentized, head polished |  |
| 1 | Head polished, handles plastic coated |  |
| 2 | Head polished, handles with multi-component grips |  |
| 3 | Pliers chrome plated, handles plastic coated |  |
| 4 | Pliers chrome plated |  |
| 5 | Pliers chrome plated, handles with multi-component grips |  |
| 6 | Pliers chrome plated, handles insulated with multi-component grips VDE-tested DIN EN/IEC 60900 |  |
| 7 | Pliers chrome plated, handles with dipped insulation, VDE tested DIN EN/IEC 60900 |  |



The maximum values always indicate the performance limit under the most favourable cutting conditions, when the wire is placed as near as possible to the joint.

CUTTING CAPACITIES

| Article no. | | | | | | page |
|-------------|--------|-----------|------|------|------|----------|
| | Length | ø mm | ø mm | ø mm | ø mm | |
| 61 0 | 200 | 1.0 - 6.0 | 4.0 | 3.5 | 3.0 | 108 |
| 62 12 | 120 | 0.3 - 1.0 | 0.7 | | | 243 |
| 64 0 | 115 | 2.0 | 1.0 | 0.6 | | 243 |
| 64 11 | 115 | 1.4 | 0.8 | | | 243 |
| 64 12 | 115 | 2.0 | 0.8 | 0.5 | | 243 |
| 64 22 | 115 | 0.8 | | | | 243 |
| 64 32 | 120 | 1.5 | 1.0 | 0.5 | | 243 |
| 64 42 | 115 | 1.5 | 1.0 | 0.5 | | 243 |
| 64 52 | 115 | 1.3 | | | | 243 |
| 64 62 | 120 | 0.6 | | | | 243 |
| 64 72 | 120 | 1.5 | | | | 243 |
| 67 0 | 140 | 4.0 | 3.1 | 2.0 | 1.5 | 108 |
| | 160 | 4.5 | 3.4 | 2.5 | 2.0 | 108 |
| | 200 | 5.0 | 3.8 | 3.0 | 2.5 | 108 |
| 68 01 | 160 | 4.0 | 2.8 | 2.3 | | 87 / 109 |
| | 180 | 4.0 | 3.2 | 2.5 | | 87 / 109 |
| | 200 | 4.0 | 3.5 | 2.8 | | 87 / 109 |
| | 280 | 4.5 | 4.0 | 3.2 | | 87 / 109 |
| 69 0 | 130 | 0.4 - 2.0 | 1.3 | 1.0 | 0.8 | 109 |
| 70 | 110 | 3.0 | 2.0 | 1.2 | | 94 |
| | 125 | 3.0 | 2.3 | 1.5 | | 94 / 202 |
| | 140 | 4.0 | 2.5 | 1.8 | | 94 / 202 |
| | 160 | 4.0 | 3.0 | 2.0 | | 94 / 202 |
| | 180 | 4.0 | 3.0 | 2.5 | | 94 / 202 |
| 71 | 200 | 6.0 | 5.2 | 4.0 | 3.6 | 102 |
| 73 0 | 160 | 4.8 | 3.8 | 2.7 | 2.2 | 97 / 205 |
| 73 7 | 180 | 5.5 | 4.6 | 3.2 | 3.0 | 100 |
| 74 0 | 140 | | 3.1 | 2.0 | 1.5 | 99 |
| | 160 | | 3.4 | 2.5 | 2.0 | 99 / 205 |
| | 180 | | 3.8 | 2.7 | 2.2 | 99 / 205 |
| | 200 | | 4.2 | 3.0 | 2.5 | 99 / 205 |
| | 250 | | 4.6 | 3.5 | 3.0 | 99 / 205 |
| 74 91 | 250 | 5.0 | 5.0 | 3.8 | 3.5 | 101 |
| 75 02 | 125 | 0.2 - 1.3 | 1.0 | 0.6 | 0.4 | 238 |
| 75 12 | 125 | 0.2 - 1.3 | 1.0 | 0.6 | 0.4 | 238 |
| 75 22 | 125 | 0.2 - 1.3 | 0.9 | 0.4 | 0.3 | 238 |
| 75 52 | 125 | 0.2 - 0.8 | 0.5 | 0.3 | | 238 |
| 76 01 | 125 | 0.4 - 3.0 | 2.3 | 1.5 | 0.6 | 96 |

| Article no. | | | | | | page |
|-------------|--------|-----------|------|------|------|-----------|
| | Length | ø mm | ø mm | ø mm | ø mm | |
| 76 03/05 | 125 | 0.4 - 2.5 | 1.8 | 1.0 | 0.6 | 96 |
| 76 12 | 125 | 0.4 - 2.5 | 1.8 | 1.0 | 0.6 | 96 |
| 76 22 | 125 | 0.4 - 2.5 | | | | 96 |
| 76 81 | 125 | 0.4 - 1.7 | 1.3 | 0.8 | | 96 |
| 77 01/02 | 115 | 0.3 - 1.6 | 1.2 | 0.6 | | 239 |
| | 130 | 0.3 - 2.0 | 1.5 | 0.8 | | 239 |
| 77 11/12 | 115 | 0.3 - 1.6 | 1.2 | 0.6 | | 239 |
| 77 21 | 115 | 0.3 - 1.3 | 1.0 | | | 239 |
| | 130 | 0.3 - 1.6 | 1.3 | | | 239 |
| 77 22 | 115 | 0.3 - 1.3 | 1.0 | | | 239 |
| | 130 | 0.3 - 2.0 | 1.5 | | | 239 |
| 77 32 | 115 | 0.3 - 1.3 | 1.0 | 0.5 | | 239 |
| 77 42 | 115 | 0.3 - 1.3 | 0.8 | | | 239 |
| | 130 | 0.3 - 1.6 | 1.3 | | | 239 |
| 77 52 | 115 | 0.3 - 1.0 | 0.8 | 0.5 | | 239 |
| 77 72 | 115 | 0.3 - 0.8 | | | | 239 |
| 78 03/13 | 125 | 0.2 - 1.6 | 1.0 | | | 235 |
| 78 23 | 125 | 0.2 - 1.0 | 0.6 | | | 235 |
| 78 31/41 | 125 | 0.2 - 1.0 | | | | 235 |
| 78 61/71 | 125 | 0.2 - 1.6 | 1.2 | | | 235 |
| 78 81/91 | 125 | 0.2 - 1.6 | 1.2 | 0.6 | | 235 |
| 79 02 | 120 | 0.2 - 1.4 | 1.0 | 0.6 | | 236 / 237 |
| 79 02 | 125 | 0.2 - 1.7 | 1.3 | 0.7 | | 236 / 237 |
| 79 12 | 125 | 0.3 - 1.7 | 1.3 | 1.0 | 0.6 | 236 / 237 |
| 79 22 | 120 | 0.1 - 1.3 | 0.8 | | | 236 / 237 |
| 79 22 | 125 | 0.1 - 1.7 | 1.0 | | | 236 / 237 |
| 79 32 | 125 | 0.2 - 1.5 | 1.1 | 0.6 | | 236 / 237 |
| 79 42 | 125 | 0.1 - 1.5 | 0.8 | | | 236 / 237 |
| 79 52 | 125 | 0.2 - 1.3 | 0.9 | 0.5 | | 236 / 237 |
| 79 62 | 125 | 0.1 - 1.3 | 0.8 | | | 236 / 237 |
| 99 0 | 200 | | 1.8 | 1.4 | | 88 |
| | 220 | | 2.4 | 1.6 | | 88 |
| | 250 | | 2.4 | 1.6 | | 88 |
| | 280 | | 2.8 | 1.8 | | 88 |
| | 300 | | 3.1 | 1.8 | | 88 |
| 99 1 | 250 | | 3.3 | 1.8 | | 89 |
| | 300 | | 3.8 | 2.0 | | 89 |

SYMBOLS

| | | | |
|--|--|--|-------------------------------------|
| | flat jaws | | with lead catcher |
| | half-round jaws | | angle |
| | round jaws | | |
| | flat and pointed jaws | | |
| | box joint | | centre cutter |
| | bolted joint | | cutting edges with bevel |
| | smooth gripping surfaces | | cutting edges with small bevel |
| | serrated gripping surfaces | | cutting edges with very small bevel |
| | cross-hatched, knurled gripping surfaces | | cutting edges without bevel |
| | with opening spring | | for flush cut of soft materials |

| | | | |
|--|---|--|---|
| | electrostatic discharging, dissipative | | weight |
| | electronics | | length |
| | VDE tested, also in conformance to GPSG (Equipment and Product Safety Act) | | |
| | insulated according to IEC 60900, usable up to 1000 V AC/1500 V DC | | soft wire |
| | insulated according to DIN VDE 0680/1, suitable for the application up to 1000 V AC / 1500 V DC | | medium hard wire |
| | conforms to a European directive | | hard wire |
| | mechanically tested in accordance with the equipment and product safety act | | piano wire |
| | WEEE marking (Waste Electrical and Electronic Equipment Directive) | | Cu + Al multi-conductor cable, solid and multi-stranded |
| | | | wire rope |
| | | | iron |
| | | | ribbon cable |
| | | | steel wire armoured cable (SWA) |

KNIPEX Quality – Made in Germany



Registered Trademarks of the companies

| | |
|-----------------------|---|
| Con-Pearl® | PARAT-WERK Schönenbach GmbH + Co. KG |
| gesis® | Wieland Electric GmbH |
| Kapton®, KEVLAR® | E. I. du Pont de Nemours and Company |
| Radox® | HUBER+SUHNER AG |
| Phillips® | Phillips Screw Company |
| Pozidriv® | European Industrial Service Ltd. |
| systainer® | TANOS GmbH |
| Mini-Fit®, Micro-Fit™ | Molex® Inc. |
| MC® | Multi-Contact AG |
| Solarlok® | Tyco Electronics |
| Torx® | Acument Global Technologies, Inc. |



Survey of pictograms on the inside of cover flap



KNIPEX-Werk
C. Gustav Putsch KG

42337 Wuppertal

Tel +49 (0) 202 – 47 94 -0

Fax +49 (0) 202 – 47 74 94

info@knipex.de
www.knipex.de

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Stripping & Cutting Tools](#) category:

Click to view products by [Knipex](#) manufacturer:

Other Similar products are found below :

[6-690504-4](#) [693855-1](#) [813066-2](#) [844764-5](#) [844765-5](#) [1-240642-7](#) [133900-001](#) [1-356885-4](#) [1424635-1](#) [1424649-1](#) [1424650-1](#) [1440-0013-84](#)
[1-458031-5](#) [1-458030-5](#) [MT10-250Q](#) [1755](#) [2-539783-7](#) [L-5211](#) [1633578-3](#) [F10-10Q](#) [1-844765-9](#) [251465-1](#) [R282066100](#) [313808-1](#)
[CST596711](#) [458031-9](#) [462839-1](#) [467281-1](#) [4-690504-2](#) [406339-3](#) [L-4994](#) [45-265](#) [453653-1](#) [45-418](#) [455177-1](#) [455671-4](#) [458144-8](#) [462007-](#)
[1](#) [462548-1](#) [464661-1](#) [224186-1](#) [679746-1](#) [809687-1](#) [852080-2](#) [856695-8](#) [11-40-4082](#) [458030-1](#) [679326-7](#) [605744-1](#) [690784-2](#)