


P.C. LAYOUT



**Specifications:**

- Contact rating: max. 50mA, 48V AC/DC; min. 1µA, 20mV AC/DC
- Contact resistance: 50mOhm max. at 1.5mA, 200µA AC
- Insulation resistance: 500MOhm min. at 250V DC
- Dielectric strength: 250V AC for 1 minute
- Temperature range: -20°C to +80°C
- Mechanical life: max. rating: 10 000 cycles; min. rating: 50 000 cycles
- Operating force: 70 - 500gf
- Mounting: on pc-board
- Soldering conditions: auto-soldering: max.: 260 +/-5°C, 5 +/-1sec.
- Switching function: on - on
- Material: Terminal / contact: phosphor bronze, gold plated  
Lever: PBT resin, black  
Frame: brass, nickel plated  
Case: PBT resin, gray

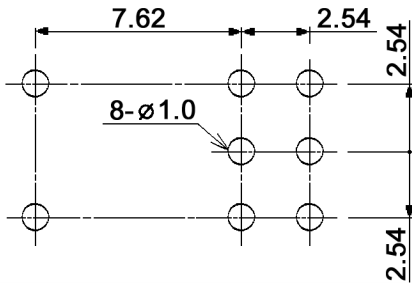

Tolerances:	Date	Name
	05/06	dr
Soldering conditions	10/06	dr
Modifications	Date	Name

**ASL 2 D-RA**

**knitter-switch**

**30 08 84**

Page

1/1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Slide Switches](#) category:*

*Click to view products by [Knitter-Switch](#) manufacturer:*

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHSS1104A](#) [MMD](#) [GH49S010001](#) [GH49WW00001](#) [1437576-8](#) [EPS1PC1](#) [1825074-1](#) [1825160-3](#)  
[1825167-2](#) [25139NLDB](#) [25436NLDB](#) [25449NAH](#) [25536NA](#) [L101011ML04B](#) [SLB1240R45](#) [SLSA12004](#) [1825078-1](#) [1825080-4](#) [1825081-1](#)  
[1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#) [GF-124-0204](#) [GH46P000001](#) [GH46W000001](#) [GH49P010001](#) [25339NA](#) [25436NLDH](#)  
[CST91246FK](#) [TG36P000000](#) [TG36P000050](#) [47227LFE](#) [49331L](#) [MHSS1105A](#) [50208L](#) [HW4S-5LF22N3](#) [L202091MS02Q](#) [4-1437581-7](#)  
[48BFSP3M2QT](#) [49329L](#) [1101M1S3ZB8E2](#) [1-1437581-1](#) [EG1218REDACTUATOR](#) [TG39W000000](#) [1825075-1](#) [TG36WS80065](#)