



P.C.B. LAYOUT

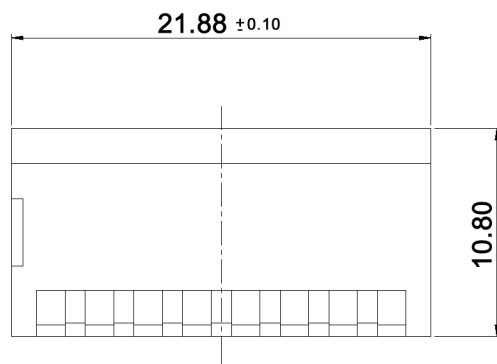


Specifications:

- Contact rating: non-switching: 100mA, 50V DC
switching: 25mA, 24V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V AC for 1 minute
- Operating temperature: -20°C to +70°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 2 000 cycles
- Electrical life: 2 000 cycles per switch 24V DC, 25mA
- Operating force: 400gf max.
- Soldering conditions: wave soldering: 260°C max., 5sec.
- Material: Base: UL94V-0 PBT thermoplastic, black
Cover: UL94V-0 PBT thermoplastic, red
Actuator: UL94V-0 PBT thermoplastic, white
Contact: phosphor bronze, gold plated over nickel

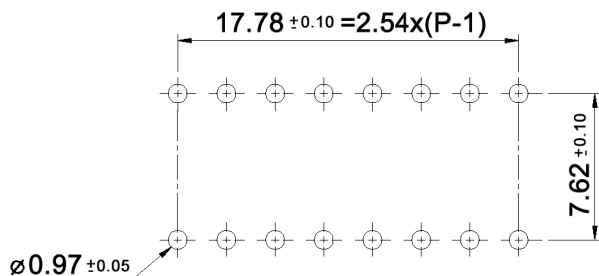

Tolerances: ±0.20mm			Date	Name	<h1>DBP 2008</h1>
			03/11	dr	
			knitter-switch		<h1>30 23 19</h1>
Modifications			Date	Name	Page 1/2

Packaging:

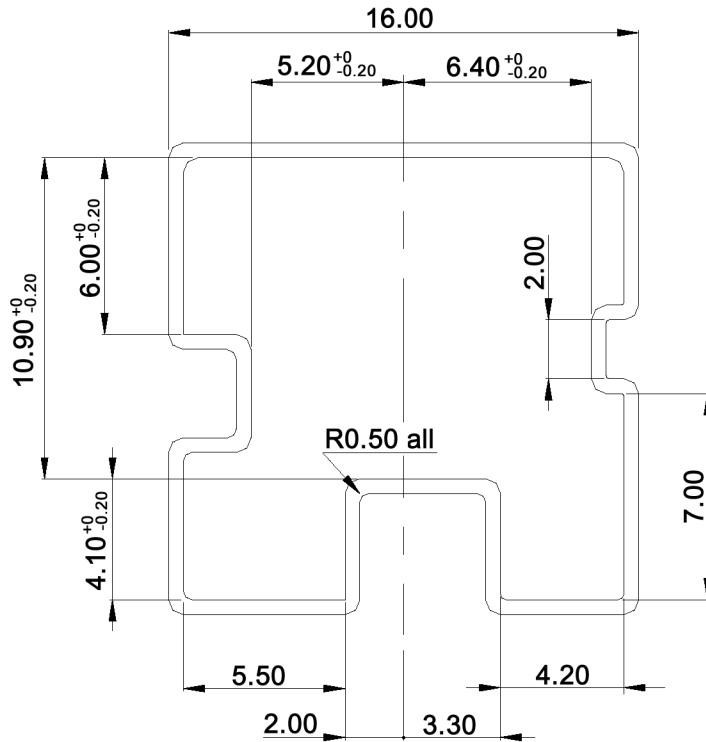

Tolerances: $\pm 0.20\text{mm}$			Date	Name	DBP 2008	
			03/11	dr		
			knitter-switch		30 23 19	Page
						2/2
Modifications	Date	Name				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[09.400BP.04](#) [106-EM04-EV](#) [106-EM08-EV](#) [106-LP04-EV](#) [106-LPD04-EV](#) [106-SDN06-EV](#) [1-1437507-0](#) [1-1437507-6](#) [1-1571983-1](#) [1-1571983-3](#) [1-1571983-4](#) [1-1571983-5](#) [1-1571998-3](#) [1-1571999-1](#) [1-1571999-6](#) [1-161347-2](#) [1-1825002-0](#) [1-1825002-3](#) [1-1825002-4](#) [1-1825002-7](#) [1-1825002-8](#) [1-1825006-1](#) [1-1825006-3](#) [1-1825006-6](#) [1-1825006-7](#) [1-1825006-9](#) [1-1825007-0](#) [1-1825007-3](#) [1-1825008-0](#) [1-1825008-2](#) [1-1825013-1](#) [1-1825013-7](#) [1-1825013-9](#) [1-1825057-0](#) [1-1825058-3](#) [1-1825058-6](#) [1-1825058-9](#) [1-1825059-1](#) [1-1825059-2](#) [1-1825059-3](#) [1-1825059-4](#) [1-1825059-7](#) [1-1825059-8](#) [1-1825059-9](#) [1-1825190-0](#) [1-1825286-0](#) [1-382394-5](#) [1-382394-7](#) [1-435802-5](#) [1-435802-](#)