


P.C.B. LAYOUT

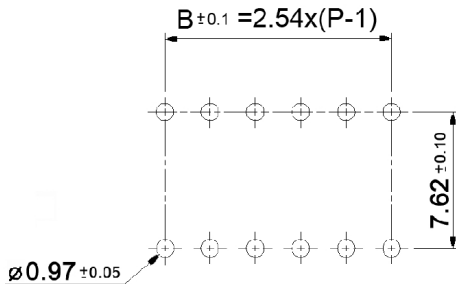

xx	Poles	A	B
02	2	6.64	2.54
03	3	9.18	5.08
04	4	11.72	7.62
05	5	14.26	10.16
06	6	16.80	12.70
07	7	19.34	15.24
08	8	21.88	17.78
09	9	24.42	20.32
10	10	26.96	22.86
12	12	32.04	27.94

Specifications:

- Contact rating: 25mA, 24V DC / 100mA, 6V DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC
- Dielectric strength: 500V, 50Hz for the duration of 1 minute
- Operating temperature: -20°C to +70°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 2 000 cycles
- Soldering conditions: auto-soldering: max.: 260°C, 5sec.
- Mounting: on pc-board
- Slide position: off
- Material: PBT meets UL94V-0
- Contacts: gold plated over nickel



Tolerances:	Date	Name	<h1>DBP 21xx</h1>
	08/08	dr	
			<h2>30 15 78</h2>
			Page 1/1
Modifications	Date	Name	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[78M03S](#) [79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [A7SS-M](#) [DBP 2110](#) [DBP 2112](#) [DBS1008](#) [DHN02FTVTR](#) [DHN10T](#) [DHS108](#)
[DPL08TN](#) [DRD16CSE04](#) [DRR4010](#) [DRR60016](#) [DRS4016](#) [BD06E](#) [1825008-1](#) [1825444-1](#) [25.350.0653.0](#) [LA2-DC12](#) [SBS 5004 TG](#)
[SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [2161391-1](#) [2-1825058-8](#) [CCVA 2.5/ 4-G-5.08](#) [P26THRR32](#)
[25.330.0653.1](#) [25.352.0353.0](#) [MDG305ST](#) [IKN0600000](#) [IKN0800000](#) [LA2-002-DC24](#) [DBP2008](#) [DBS1003](#) [DBS2008](#) [438872000](#)
[DRD10CRAE04](#) [DRS1604](#) [DSR02T](#) [DSS 208 N](#) [5-1825033-1](#) [106-SDN06-EV](#) [1-1437507-6](#) [E2FMX2D1M1TGJ03M](#)
[E3ZMCT81M1TJ03M](#)