



Dual-in-line Switches


Specifications:

Contact rating:	24 V DC, 25 mA / 6 V DC, 100 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20 °C to +70 °C
Mechanical life:	minimum 2 000 operations per pole
Material:	PBT meets UL 94 V-0
Contacts:	gold-plated over nickel
Construction:	case sealed
	Series DBS 2000 slide recessed, sealed with protective tape, washable
Mounting:	on pc-board
Slide position:	OFF
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C

Models:



Series DBS 2000

Type	Poles	Length (A)
DBS 2001	1	3.90 mm
DBS 2002	2	6.44 mm
DBS 2003	3	8.98 mm
DBS 2004	4	11.52 mm
DBS 2005	5	14.06 mm
DBS 2006	6	16.60 mm
DBS 2007	7	19.14 mm
DBS 2008	8	21.68 mm
DBS 2009	9	24.22 mm
DBS 2010	10	26.76 mm
DBS 2012	12	31.84 mm

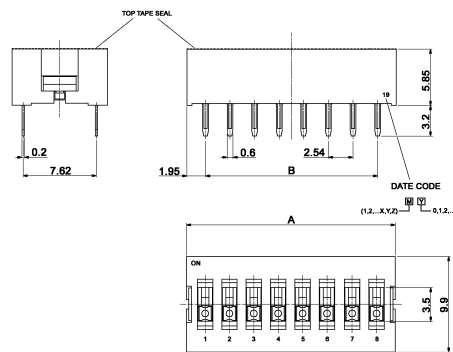

Series DBS 2100

Type	Poles	Length (A)
DBS 2101	1	3.90 mm
DBS 2102	2	6.44 mm
DBS 2103	3	8.98 mm
DBS 2104	4	11.52 mm
DBS 2105	5	14.06 mm
DBS 2106	6	16.60 mm
DBS 2107	7	19.14 mm
DBS 2108	8	21.68 mm
DBS 2109	9	24.22 mm
DBS 2110	10	26.76 mm
DBS 2112	12	31.84 mm

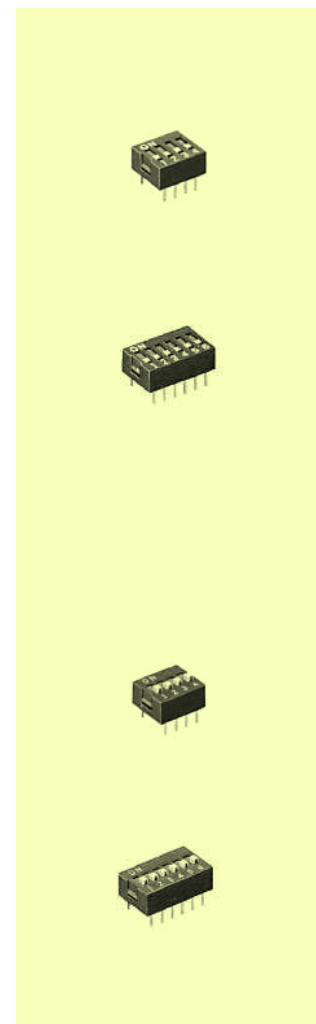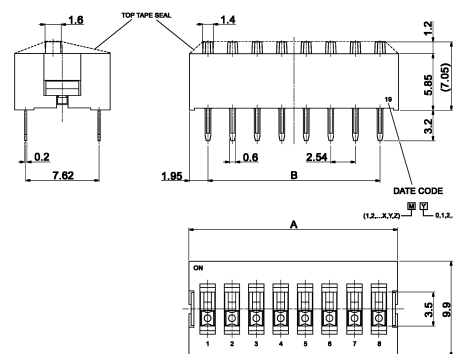

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[09.400BP.04](#) [106-EM04-EV](#) [106-EM08-EV](#) [106-LP04-EV](#) [106-LPD04-EV](#) [106-SDN06-EV](#) [1-1437507-0](#) [1-1437507-6](#) [1-1571983-1](#) [1-1571983-3](#) [1-1571983-4](#) [1-1571983-5](#) [1-1571998-3](#) [1-1571999-1](#) [1-1571999-6](#) [1-161347-2](#) [1-1825002-0](#) [1-1825002-3](#) [1-1825002-4](#) [1-1825002-7](#) [1-1825002-8](#) [1-1825006-1](#) [1-1825006-3](#) [1-1825006-6](#) [1-1825006-7](#) [1-1825006-9](#) [1-1825007-0](#) [1-1825007-3](#) [1-1825008-0](#) [1-1825008-2](#) [1-1825013-1](#) [1-1825013-7](#) [1-1825013-9](#) [1-1825057-0](#) [1-1825058-3](#) [1-1825058-6](#) [1-1825058-9](#) [1-1825059-1](#) [1-1825059-2](#) [1-1825059-3](#) [1-1825059-4](#) [1-1825059-7](#) [1-1825059-8](#) [1-1825059-9](#) [1-1825190-0](#) [1-1825286-0](#) [1-382394-5](#) [1-382394-7](#) [1-435802-5](#) [1-435802-](#)