



Dual-in-line Switches


Specifications:

Contact rating:	24 V DC, 25 mA / 6 V DC, 100 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20 °C to +70 °C
Mechanical life:	minimum 2 000 operations per pole
Material:	PBT meets UL 94 V-0
Contacts:	gold-plated over nickel
Construction:	case sealed
	Series DBS 2000 slide recessed, sealed with protective tape, washable
Mounting:	on pc-board
Slide position:	OFF
Soldering conditions:	wave-soldering – max.: 5 sec, 260 °C

Models:



Series DBS 2000

Type	Poles	Length (A)
DBS 2001	1	3.90 mm
DBS 2002	2	6.44 mm
DBS 2003	3	8.98 mm
DBS 2004	4	11.52 mm
DBS 2005	5	14.06 mm
DBS 2006	6	16.60 mm
DBS 2007	7	19.14 mm
DBS 2008	8	21.68 mm
DBS 2009	9	24.22 mm
DBS 2010	10	26.76 mm
DBS 2012	12	31.84 mm

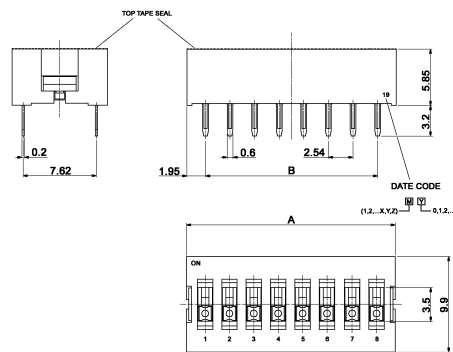

Series DBS 2100

Type	Poles	Length (A)
DBS 2101	1	3.90 mm
DBS 2102	2	6.44 mm
DBS 2103	3	8.98 mm
DBS 2104	4	11.52 mm
DBS 2105	5	14.06 mm
DBS 2106	6	16.60 mm
DBS 2107	7	19.14 mm
DBS 2108	8	21.68 mm
DBS 2109	9	24.22 mm
DBS 2110	10	26.76 mm
DBS 2112	12	31.84 mm

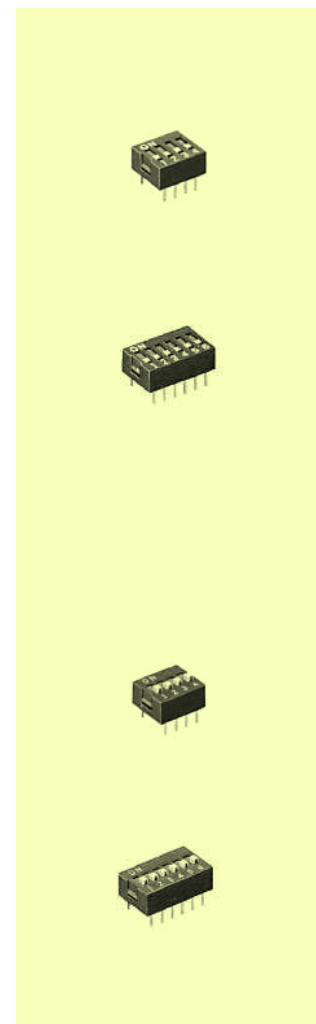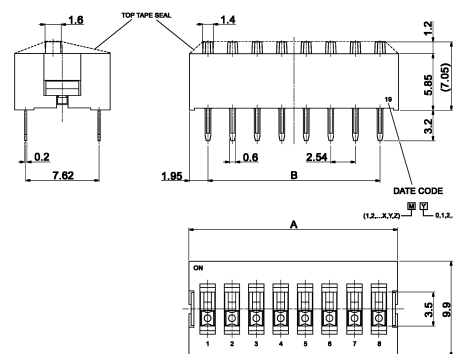

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coded Rotary Switches](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[PT65SG178](#) [PT65SG23](#) [DRS4010](#) [CW1S-2E11](#) [S-1031A](#) [SBS1004](#) [P36S101TR](#) [P65THR101L254](#) [RM3AF-10R-V-T/R](#) [RH3HAF-10R-V-B](#)
[PT65501RT](#) [P25SMT101TR](#) [P65SMT101](#) [P65THR101V](#) [MSDR-10H1](#) [GSDR-10S](#) [01-1433](#) [07-3153](#) [07-3154](#) [CRD10CM0SBR](#) [DRS4116](#)
[94HCB16RAT](#) [94HCB10T](#) [94HBB16WT](#) [94HBB16RAT](#) [94HBB10WT](#) [94HBB10RAT](#) [94HBB08RAT](#) [94HAC10T](#) [94HAB16WT](#)
[94HAB16T](#) [94HAB10WT](#) [94HAB10RAT](#) [94HAB08WT](#) [94HAB08RAT](#) [ND3FR10P](#) [ND3FR16B-R](#) [DRR3110](#) [94HEB08WRT](#)
[94HCB16WT](#) [94HCB16T](#) [94HCB10RAT](#) [94HCB08T](#) [94HBB16T](#) [94HBB10T](#) [94HBB08T](#) [94HAB16RAT](#) [94HAB10T](#) [94HAB08T](#) [S-2011A](#)