


P.C.B. LAYOUT

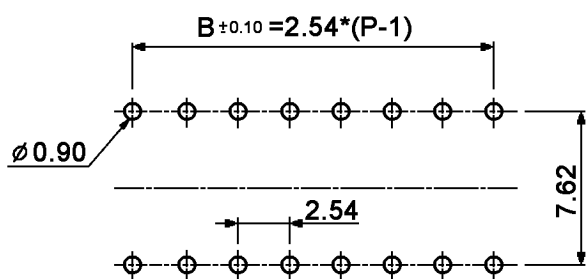

xx	Poles	DIM. A	DIM. B
01	1	2.44	-
02	2	4.98	2.54
03	3	7.52	5.08
04	4	10.06	7.62
05	5	12.60	10.16
06	6	15.14	12.70
07	7	17.68	15.24
08	8	20.22	17.78
09	9	22.76	20.32
10	10	25.30	22.86
12	12	30.38	27.94

Specifications:

Contact rating:

non-switching: 100mA, 50V DC  
 switching: 25mA, 24V DC  
 min.: 20mV AC/DC at 1µA

Contact resistance:

100mOhm max.

Insulation resistance:

100MOhm min. at 500V DC for 1 minute +/-5sec.

Dielectric strength:

500V AC (50/60Hz) for 1 minute

Shock resistance:

MIL STD 202F, method 213B, cond. A,  
 contact interruption <10µsec.

Vibration resistance:

MIL STD 202F, method 204, cond. C,  
 contact interruption <10µsec.

Operating temperature:

-40°C to +85°C

Storage temperature:

-40°C to +85°C

Mechanical life:

5 000 cycles

Operating force:

1 000gf max.

Soldering conditions:

260°C max., 10sec. max.


Sealing:

by protective tape, washable by aqueous detergents and isopropyl alcohol

Material:

Cover / base: high-temp. thermoplastic PA-9T UL94V-0, molded black  
 Contact: copper, 0.3µm gold plated over 0.5µm nickel  
 Terminal: brass, 0.3µm gold plated over 0.5µm nickel  
 Actuator: thermoplastic LCP UL94V-0, molded white  
 Tape: kapton

SCHEMATIC (TYP.)



(12 POS. AVAIL)



Tolerances: ±0.2mm	Date	Name
	07/10	dr
Rename	02/14	dr
Sealing	11/13	dr
Specifications	05/11	dr
Number of poles	11/10	dr
Modifications	Date	Name

**DBS 50xx G**

**knitter-switch**

**30 21 44**

Page

1/1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [Knitter-Switch](#) manufacturer:*

Other Similar products are found below :

[09.400BP.04](#) [106-EM04-EV](#) [106-EM08-EV](#) [106-LP04-EV](#) [106-LPD04-EV](#) [106-SDN06-EV](#) [1-1437507-0](#) [1-1437507-6](#) [1-1571983-1](#) [1-1571983-3](#) [1-1571983-4](#) [1-1571983-5](#) [1-1571998-3](#) [1-1571999-1](#) [1-1571999-6](#) [1-161347-2](#) [1-1825002-0](#) [1-1825002-3](#) [1-1825002-4](#) [1-1825002-7](#) [1-1825002-8](#) [1-1825006-1](#) [1-1825006-3](#) [1-1825006-6](#) [1-1825006-7](#) [1-1825006-9](#) [1-1825007-0](#) [1-1825007-3](#) [1-1825008-0](#) [1-1825008-2](#) [1-1825013-1](#) [1-1825013-7](#) [1-1825013-9](#) [1-1825057-0](#) [1-1825058-3](#) [1-1825058-6](#) [1-1825058-9](#) [1-1825059-1](#) [1-1825059-2](#) [1-1825059-3](#) [1-1825059-4](#) [1-1825059-7](#) [1-1825059-8](#) [1-1825059-9](#) [1-1825190-0](#) [1-1825286-0](#) [1-382394-5](#) [1-382394-7](#) [1-435802-5](#) [1-435802-](#)