


P.C. LAYOUT

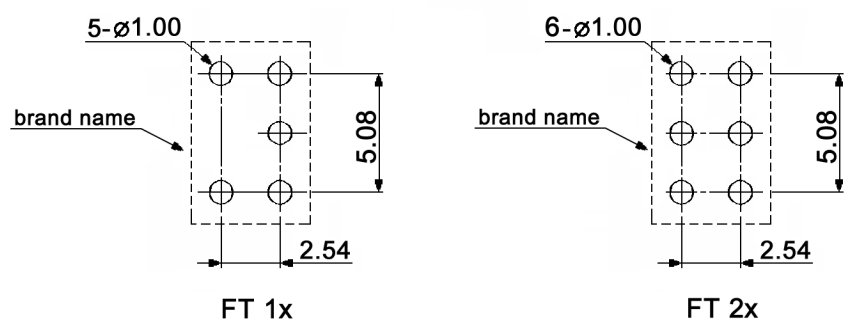

"x"	Switch function
D	on - on
E	on - off - on
F	mom - on
G	mom - off - mom
H	mom - off - on

Specifications:

Contact rating: max.: 0.4VA, 28V DC
 min.: 1µA, 20mV DC
Contact resistance: 100mOhm max.
Insulation resistance: 500MOhm min. at 250V DC
Operating temperature: -20°C to +80°C
Mechanical life: min. 30 000 cycles
Soldering conditions: auto-soldering: max.: 250 +/-5°C, 7sec.
 max.: 270 +/-5°C, 5sec.

The closed contacts are opposite to the lever position. For code F and H: "mom" is on the left hand side when looking at the brand name side.

Mounting: on pc-board
ESD resistance: 8kV min. (between lever and terminals)
Material: Contacts: phosphor bronze, gold plated
 Terminals: PC terminals, crimped, phosphor bronze, gold plated
 Case / lever: PES, UL94V-0, washable



Tolerances:	Date	Name	<h1>FT 1x. / FT 2x.</h1>
	08/08	dr	
			<h2>30 15 75</h2>
			Page
			1/1
Modifications	Date	Name	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[8940K2012](#) [8971K1133](#) [LW1L-M1C10V-A](#) [LW1L-M1C70-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M22-D-R-GB0/K11](#) [M7E-HRN2](#) [67021K512](#) [67081K512X](#) [701PB580](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [MML21EA2ADK](#) [MML21KA3ABK](#)
[MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#) [861K11911T01A07](#)
[861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [8646ABUL](#) [9001KXRK](#) [907AYY100](#) [PMHD155A1](#) [9533CD4+U574+U4922](#) [95-414.000](#) [99-450.837](#) [99-453.837](#) [PV3H2B0NN-341](#) [1203MRA](#) [A22NZBGANGA](#) [A22NZBNANGA](#) [A22NZMPATRA](#) [A2PMA1X03EC56](#)
[A3A-5123-02](#) [A3A-7140](#) [A3A-7310](#) [A3A-7340](#) [A3U-TMW-A2C-5M](#) [A595](#) [12037A2ULCSA](#) [ABD122N-B](#)