## **Miniature Slide Switches**



## Specifications:

Contact rating: 30 V DC, 350 mA

Contact resistance:  $< 20 \text{ m}\Omega$ 

Insulation resistance:  $> 100 \text{ M}\Omega$  at 500 V DC

Dielectric strength: 500 V, 50 Hz for the duration of 1 minute

Operating temperature: -20 °C to +85 °C


Mechanical life: minimum 10 000 operations

Contacts: copper alloy, silver-plated over nickel barrier

Contact timing: non-shorting

Slide colour: black, further colours on request

Soldering conditions: wave-soldering – max.: 5 sec, 260  $^{\circ}$ C ± 5  $^{\circ}$ C

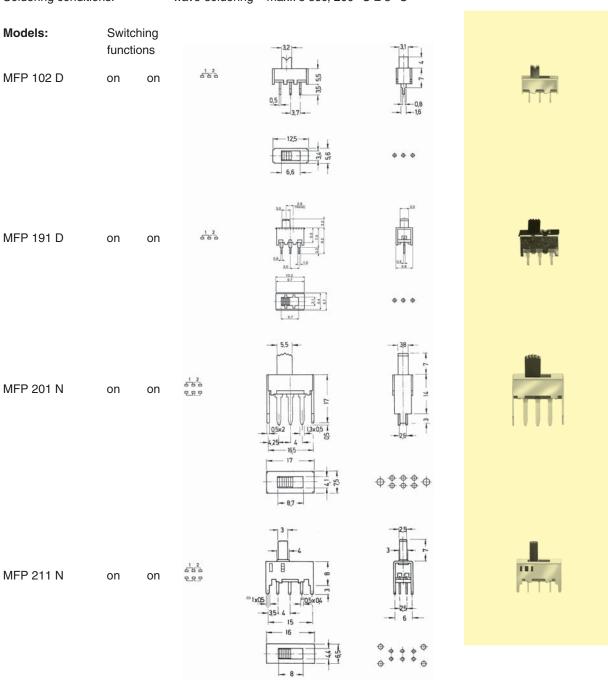

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Switches category:

Click to view products by Knitter-Switch manufacturer:

Other Similar products are found below:

6-1437581-1 M43R MHS123K15D MHSS1104A MMD GH49S010001 GH49WW00001 1437576-8 EPS1PC1 1825074-1 1825160-3

1825167-2 25139NLDB 25436NLDB 25449NAH 25536NA L101011ML04B SLB1240R45 SLSA12004 1825078-1 1825080-4 1825081-1

1825269-1 1825270-2 STS141RA04 T2215BEN506 GF-124-0204 GH46P000001 GH46W000001 GH49P010001 25339NA 25436NLDH

CST91246FK TG36P000000 TG36P000050 47227LFE 49331L MHSS1105A 50208L HW4S-5LF22N3 L202091MS02Q 4-1437581-7

X2225CR-437W 48BFSP3M2QT 49329L 1101M1S3ZB8E2 1-1437581-1 EG1218REDACTUATOR TG39W000000 1825075-1