




CIRCUIT DIAGRAM



C: COMMON PIN

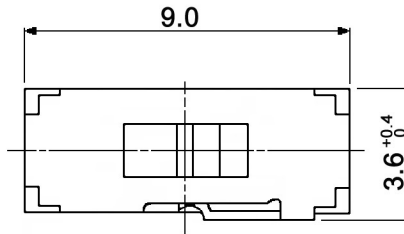

HOLE LAYOUT TOP VIEW

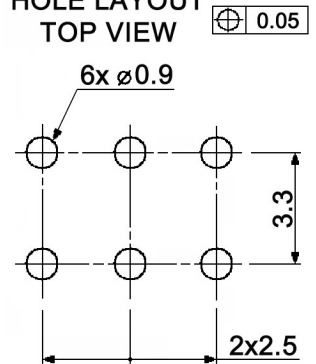

Specifications:

- Contact rating:** 0.15A, 12V DC
300mA, 6V DC
- Contact resistance:** 70mOhm max.
- Insulation resistance:** 100MOhm min. at 500V DC for 1 minute
- Operating temperature:** -25°C to +85°C
- Mechanical life:** 5 000 cycles min.
- Operating force:** 200 +/-100gf
- Soldering conditions:** 260 +/-5°C, 5 +/-1sec.
- Material:** Terminal: brass strip, silver plated
Cover: SUS, washing
Slider: PA46, natural
Contact plate: C7025, silver plated
Case: PA46, black
- Packaging unit:** MMP 221: 700 pcs. / tray, 5 trays / box
MMP 221 S: 50 pcs. / tube, 10 tubes / bundle

Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date	Name
	11/07	dr
Packaging	07/15	dr
Rename	09/12	dr
Contact rating	12/07	dr
Modifications	Date	Name

MMP 221 / MMP 221 S

knitter-switch

21 13 14

Page

1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Slide Potentiometers](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[M22](#) [MHS133K](#) [MSS12A](#) [MSSA22](#) [M42A](#) [MSS42G](#) [SS-4928](#) [RSA0K11A901L](#) [SLB124145](#) [SLB1340R45](#) [RA6020F-10-20D1-B50K](#)
[RA4520F-10-20D1-B50K](#) [TSS11AGPC](#) [X22205CAAF](#) [448XC2103BDN](#) [X22205A-437W](#) [T22205BAAE](#) [SS-22J08-G5](#) [X22205AAAL](#)
[K22208EAAG](#) [PS15-10PC1BR10K](#) [1101M1S3ZQI2](#) [1201M1S1ZBE2](#) [1101M2S4AGE2](#) [1101M2S6ABE2](#) [1201M1S3ZBE2](#) [EVA-](#)
[JQKR15Y14](#) [EVA-NADR15A14](#) [EVA-NADR15D14](#) [EVA-NE4R15A14](#) [EVB-NADR15Y14](#) [ASE1D](#) [ASE1E](#) [ASE2D](#) [MFP113D](#) [MFP130](#)
[MFP1323](#) [MFP1424](#) [MFP161D](#) [MFP2220R](#) [MFP231P](#) [MFP261N](#) [MMP1010DRA1](#) [MMP131](#) [L202021MS02Q](#) [MFP120](#) [MFP 130 R](#)
[MFP1323R](#) [MFP140](#) [MFP140-R](#)