



P.C. LAYOUT

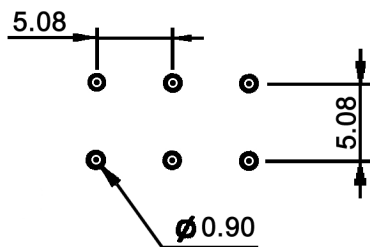

SCHEMATIC



Specifications:

Contact rating: 1A, 250V AC; 3A, 120V AC or 28V DC
 Contact resistance: 50mOhm max.
 Insulation resistance: 1 000MOhm min.
 Dielectric strength: 1 000V RMS
 Operating temperature: -40°C to +85°C
 Mechanical life: 20 000 make-and-break cycles
 Min. load: 100mA, 10V DC
 Soldering conditions: auto-soldering: 260 +/-5°C, max. 10sec.
 Material: Case: nylon, white
 Actuator / housing: nylon, black
 Terminals / contact: silver plated copper alloy



| | | | | |
|----------------------|-------|-------|-----------------------|---------------------|
| Tolerances: | | Date | Name | <h1>MSS 3122 N</h1> |
| | | 06/04 | us | |
| Dimensions | 11/08 | dr | | |
| Specifications | 05/08 | dr | | |
| Soldering conditions | 08/07 | dr | knitter-switch | <h2>30 04 58</h2> |
| Schematic | 08/05 | dr | | |
| Contact material | 11/04 | dr | | 1/1 |
| Modifications | Date | Name | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Slide Switches](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHS133K](#) [MHSS1104A](#) [MMD](#) [GH49S010001](#) [MSS12A](#) [EPS1PC1](#) [1825160-3](#) [1825167-2](#) [K232CB](#)
[25139NLDB](#) [25449NAH](#) [SLB1240R45](#) [1825078-1](#) [1825080-4](#) [1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#) [GH46P000001](#)
[GH46W000001](#) [GH49P010001](#) [25339NA](#) [M42A](#) [TG36P000000](#) [TG36P000050](#) [AYZ0202AG](#) [47227LFE](#) [49331L](#) [50208L](#) [L203091MS02Q](#)
[4-1437581-7](#) [X2225CR-437W](#) [49329L](#) [1101M1S3ZB8E2](#) [1-1437581-1](#) [MSS2225G04](#) [TG39W000000](#) [1825075-1](#) [MSS42G](#) [TG36WS80065](#)
[T105S1CWZBE](#) [SLB124145](#) [SLB1280R5](#) [SLB1340R45](#) [25136NLDB](#) [TG39W000050](#) [4021.4621](#)