

model **09P**
PROGRAMMING CABLE

technical datasheet



> **features** <

- Industry standard micro-plug
- Gold-plated contacts provide high durability
- Durable flexible cables
- High quality strain relief, tested to 10,000 bends
- Optional color dot marking
- Choice of connector styles and colors

> **specifications** <

Mechanical Data

- Insertion Force (socket/plug):
- 3 terminals >2.5 N (0.5 lb.)
 - 4 terminals >3.0 N (0.6 lb.)
 - 5 terminals >4.0 N (0.9 lb.)
- Extraction Force (socket/plug):
- 3 terminals <5.5 N (1.2 lb.)
 - 4 terminals <8.0 N (1.8 lb.)
 - 5 terminals <8.0 N (1.9 lb.)
- Bending of Cable 10,000 times (1,4 \emptyset mm cable)

Electrical Data

- Plug
- Cable resistance <2 Ω /m (0.6 Ω /ft.)
 - Cable capacitance <100 pF/m (30.4 pF/ft.)
 - Operating current 500 mA max. (continuous)
 - Insulation resistance >1 M Ω

Socket and Plug

- Contact resistance <150 m Ω
- Contact resistance stability <150 m Ω (pulling with 100 g (0.22 lb.) in all directions)

Environmental Data

- Storage temperature range -40°C to +60°C (-40°F to +140°F)
- Operational temp. range -10°C to +55°C (14°F to +131°F)
- Humidity Conditions 10% to 95% rh.

Construction

- Connector Polyamide 6.6
- Contact Tube Gold-plated copper alloy
- Cable \emptyset 1,4 mm (\emptyset 0.055 in.)

Specifications subject to change.

+1-630-250-5100


1151 Maplewood Dr.
Itasca, IL 60143 USA




model **09P** PROGRAMMING CABLE

II connector configuration


STYLE 1
(PLUG WITH OPEN END)



STYLE 2
(PLUG TO PLUG)




STYLE 3,
4, 5 AND 6
(PLUG TO
MINI-DIN)

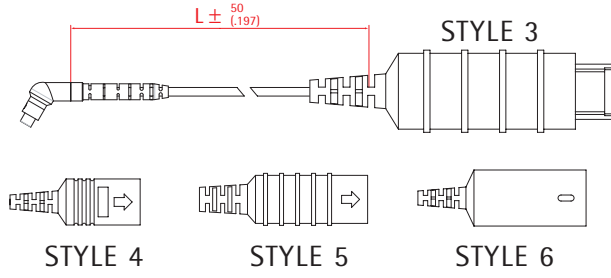


CONNECTOR CONFIGURATION

- [1] 09 PLUG AT ONE END
- [2] 09 PLUG AT BOTH ENDS
- [3] 09 PLUG WITH LONG, RIBBED MINI-DIN CONNECTOR
- [4] 09 PLUG WITH SHORT, RIBBED MINI-DIN CONNECTOR
- [5] 09 PLUG WITH LONG, RIBBED 8 PIN MINI-DIN CONNECTOR (Y-STYLE CABLE)
- [6] 09 PLUG WITH LONG, SMOOTH MINI-DIN CONNECTOR


III electrical configurations




STANDARD WIRING FOR
CONNECTOR CONFIGURATION 1

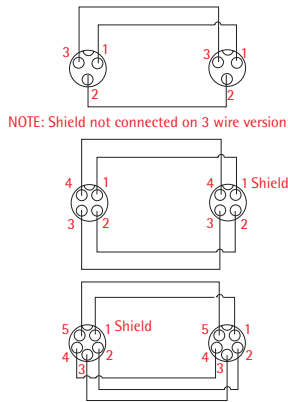


STANDARD WIRING FOR
CONNECTOR CONFIGURATION 2

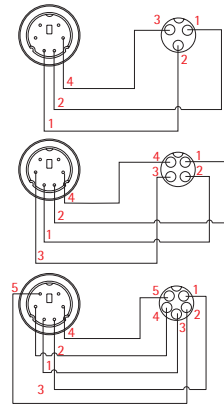


STANDARD WIRING FOR
CONNECTOR CONFIGURATION 3, 4 AND 6

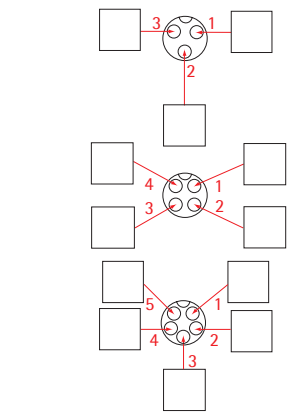

CUSTOM WIRING FOR
CONNECTOR CONFIGURATION 1

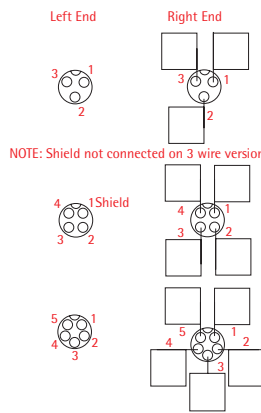

CUSTOM WIRING FOR
CONNECTOR CONFIGURATION 2

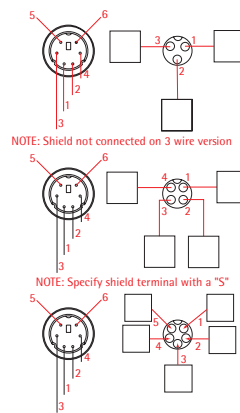

CUSTOM WIRING FOR
CONNECTOR CONFIGURATION 3, 4 AND 6

Style 5 requires special configuration, please consult with your sales representative for more information.




1151 Maplewood Dr.
Itasca, IL 60143 USA +1-630-250-5100


model **09P** PROGRAMMING CABLE



plug dimensions

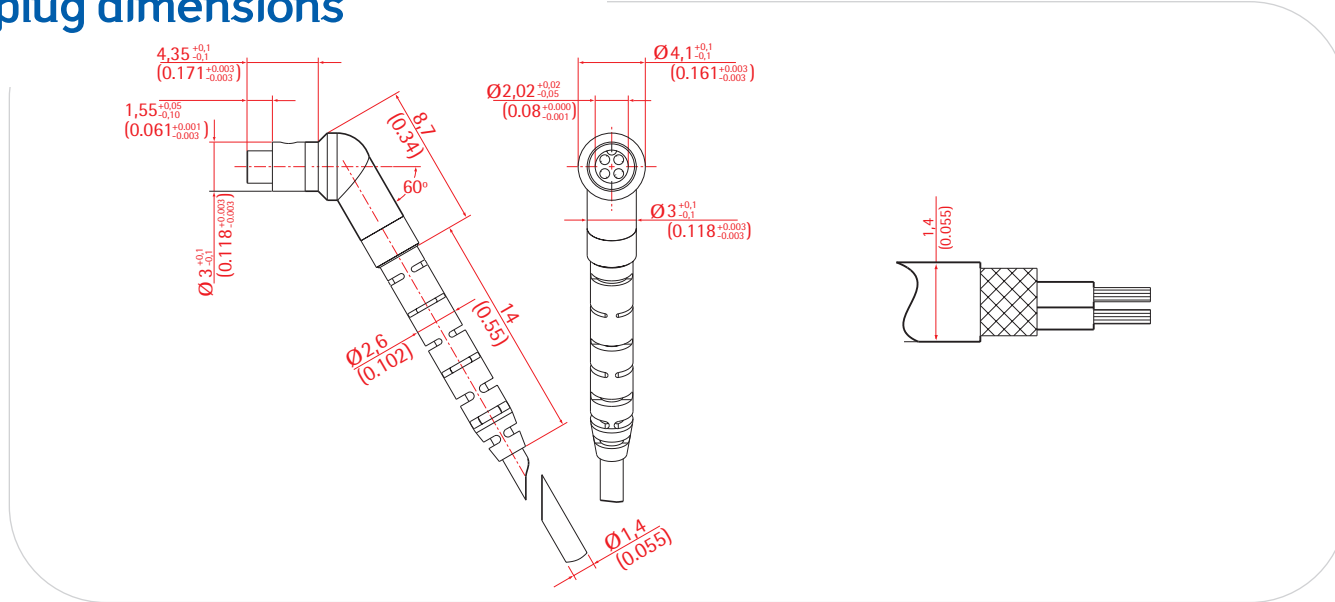

IV/V plug color/color dot markings on plug(s)

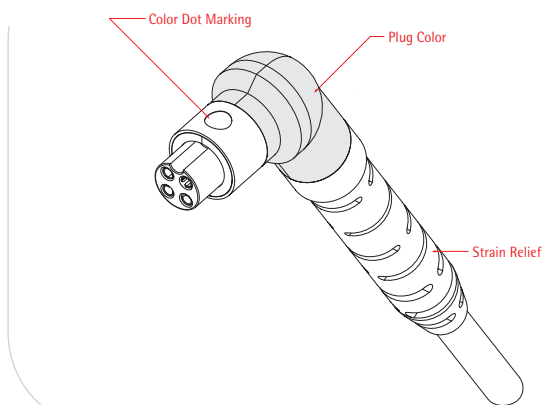

PLUG COLOR

- [2 5] STANDARD COLOR: BLACK
- [3 6] RED
- [1 3] BLUE
- [X X] SPECIAL

COLOR DOT MARKINGS ON PLUG(S)

- [0 7] RED
- [0 2] BLUE
- [X X] SPECIAL

VI cable length

Refer to "connector configuration" in Section II.

CABLE LENGTH (L)

- [0 1] 10 cm (4 in.)
- [0 2] 20 cm (8 in.)
- [0 3] 30 cm (12 in.)
- [0 4] 40 cm (16 in.)
- [0 5] 50 cm (20 in.)
- [1 0] 100 cm (40 in.)
- [1 5] 150 cm (60 in.)
- [2 0] 200 cm (80 in.)
- [2 5] 250 cm (100 in.)

Note: Custom cable length available upon request, subject to minimum order requirements, pricing varies with length. Contact your sales representative for details.

VIII mini-DIN color

- [1] BLACK
- [2] GRAY
- [3] BLUE
- [4] RED

+1-630-250-5100

1151 Maplewood Dr.
Itasca, IL 60143 USA



model 09P PROGRAMMING CABLE

> ordering <

How to order— Using the chart below, determine your order number by finding the correct sequence of code numbers and/or letters as shown at right. Details on each parameter can be found within the brochure in the section with the corresponding roman numeral.

	model	I number of contacts	II connector configuration	III electrical configuration	IV plug color	V color dot marking on plug(s)	VI cable length	VII cable color	VIII mini-DIN color	IX special
09P	X	X	XX	XX	XX	XX	X	X	XX	

PARAMETER	YOUR CHOICE	GUIDELINES/NOTES
I number of contacts		3, 4 or 5
II connector configuration		
III electrical configuration		[00] Standard [XX] Custom Configuration
IV plug color		
V color dot marking on plug(s)		
VI cable length		
VII cable color		[1] Black [2] Gray
VIII mini-DIN color		
IX special		[S] Standard [XX] Special



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Cables](#) / [Video Cables](#) / [RCA Cables](#) category:

Click to view products by [Knowles](#) manufacturer:

Other Similar products are found below :

[59384500100E](#) [RCA10RCA](#) [DB25M05DB25MY](#) [DB25M10DB25MY](#) [DB25M10XLRMXLRFY](#) [1-3737-600-3216](#) [15AK25X](#) [CA19](#) [CA20](#)
[CAG34](#) [25FK25](#) [LF3BLX](#) [30-513](#) [28-511-0](#) [30-419](#) [30AR30](#) [30AK30](#) [30AN30](#) [RCA05RCA](#) [RCA05RCAB](#) [RCA05TS](#) [RCA10RCAB](#)
[420001400-3](#) [426058900-3](#) [427493000-3](#) [49152A-010-S2](#) [TT6RX](#) [TT7BKX](#) [TT93602](#) [32-3766](#) [32HR07284X](#) [CA25B](#) [CA39](#)
[DB25M02XLRMXLRFY](#) [LF1BKX](#) [LF3RX](#) [49442 010S2](#) [DVI-I-VGA/DVI-D-CBL-MATRIX](#) [VMP3YX](#) [VMP2YX](#) [TT746](#) [TT744](#) [CN13B](#)
[MDC4P13](#) [MDC8P53](#) [LF4GNX](#) [LF2GYX](#) [426494200-3](#) [49153A 010S2](#) [LF1RX](#)