

Electrical Details

Electrical Configuration	C Filter	
Capacitance Measurement	@ 1000hr Point	
Current Rating	10A	
Insulation Resistance (IR)	10GΩ or 1000ΩF	
Temperature Rating	-55°C to +125°C	
Ferrite Inductance (Typical)	Not Applicable	

Mechanical Details

Head Diameter	6.35mm (0.250")
Nut A/F	6.0mm (0.236")
Washer Diameter	9.1mm (0.358")
Mounting Torque	0.6Nm (5.31bf in) max. if using nut 0.3Nm (2.65bf in) max. into tapped hole
Mounting Hole Diameter	5.2mm ± 0.1 (0.205" ± 0.004")
Max. Panel Thickness	3.4mm (0.134")
Weight (Typical)	1.8g (0.06oz)
Finish	Silver plate on copper undercoat



Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)								
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz			
*SFCMC5000100ZC	10pF -20% / +80%	COG/NPO	500#	750						4			
SFCMC5000150ZC	15pF -20% / +80%											7	
SFCMC5000220ZC	22pF -20% / +80%											10	
SFCMC5000330ZC	33pF -20% / +80%											12	
*SFCMC5000470ZC	47pF -20% / +80%										1	15	
*SFCMC5000680MC	68pF										2	18	
*SFCMC5000101MC	100pF										4	22	
SFCMC5000151MC	150pF										7	25	
*SFCMC5000221MC	220pF										10	29	
*SFCMC5000331MC	330pF										13	33	
*SFCMC5000471MX	470pF	†X7R					1	16	35				
SFCMC5000681MX	680pF						2	19	36				
*SFCMC5000102MX	1.0nF	X7R	500#	750				4	23	41			
SFCMC5000152MX	1.5nF								7	26	45		
*SFCMC5000222MX	2.2nF								10	30	50		
SFCMC5000332MX	3.3nF								13	33	52		
*SFCMC5000472MX	4.7nF								1	16	36	55	
SFCMC5000682MX	6.8nF								2	19	39	57	
*SFCMC5000103MX	10nF								4	22	41	60	
*SFCMC5000153MX	15nF								7	25	44	62	
*SFCMC5000223MX	22nF								10	29	46	65	
SFCMC5000333MX	33nF								13	33	48	68	
*SFCMC5000473MX	47nF								1	16	35	70	
SFCMC5000683MX	68nF								2	19	39	54	>70
SFCMC5000104MX	100nF								4	22	41	57	>70
SFCMC5000154MX	150nF								7	25	45	60	>70
*SFCMC2000224MX	220nF					200	500		10	29	49	62	>70
SFCMC1000334MX	330nF					100	250		13	33	52	66	>70
*SFCMC1000474MX	470nF							1	16	35	55	68	>70
SFCMC0500684MX	680nF							50	125	2	19	38	58

Also rated for operation at 115Vac 400Hz. Self heating will occur - evaluation in situ recommended. * Recommended values. † Also available in COG/NPO.

Ordering Information - SFCMC range


SF	C	M	C	500	0101	M	C	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Nuts & Washers
Syfer Filter	6.35mm A/F	M5	C = C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NPO X = X7R	0 = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part. Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

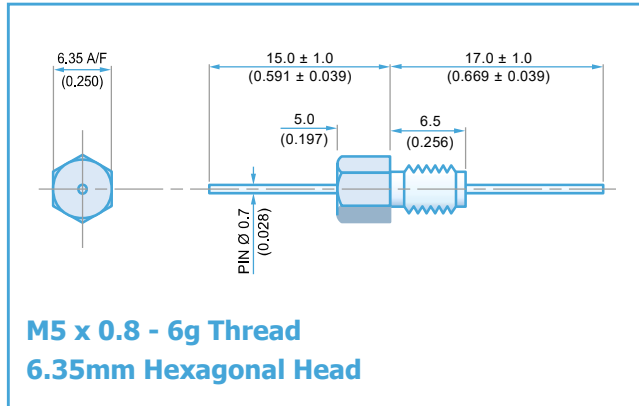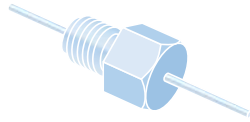

Electrical Details

Electrical Configuration	L-C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	500nH



Mechanical Details

Head Diameter	6.35mm (0.250")
Nut A/F	6.0mm (0.236")
Washer Diameter	9.1mm (0.358")
Mounting Torque	0.6Nm (5.31lbf in) max. if using nut 0.3Nm (2.65lbf in) max. into tapped hole
Mounting Hole Diameter	5.2mm ± 0.1 (0.205" ± 0.004")
Max. Panel Thickness	3.4mm (0.134")
Weight (Typical)	1.8g (0.06oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)								
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz			
*SFCML5000100ZC	10pF -20% / +80%	COG/NP0	500#	750	-	-	-	-	-	6			
SFCML5000150ZC	15pF -20% / +80%				-	-	-	-	-	9			
SFCML5000220ZC	22pF -20% / +80%				-	-	-	-	-	12			
SFCML5000330ZC	33pF -20% / +80%				-	-	-	-	1	15			
*SFCML5000470ZC	47pF -20% / +80%				-	-	-	-	2	19			
*SFCML5000680MC	68pF				-	-	-	-	4	20			
*SFCML5000101MC	100pF				-	-	-	-	7	24			
SFCML5000151MC	150pF				-	-	-	-	10	27			
*SFCML5000221MC	220pF				-	-	-	-	12	30			
*SFCML5000331MC	330pF				-	-	-	1	16	34			
*SFCML5000471MX	470pF	†X7R	500#	750	-	-	-	2	19	38			
SFCML5000681MX	680pF				-	-	-	3	22	41			
*SFCML5000102MX	1.0nF	X7R	500#	750	-	-	-	6	25	44			
SFCML5000152MX	1.5nF				-	-	-	9	29	48			
*SFCML5000222MX	2.2nF				-	-	-	12	31	51			
SFCML5000332MX	3.3nF				-	-	-	15	35	54			
*SFCML5000472MX	4.7nF				-	-	1	18	39	57			
SFCML5000682MX	6.8nF				-	-	2	21	41	60			
*SFCML5000103MX	10nF				-	-	4	23	43	63			
*SFCML5000153MX	15nF				-	-	7	27	46	66			
*SFCML5000223MX	22nF				-	-	10	30	48	68			
SFCML5000333MX	33nF				-	-	13	34	50	70			
*SFCML5000473MX	47nF				-	-	1	17	37	51	>70		
SFCML5000683MX	68nF				-	-	2	20	40	55	>70		
*SFCML5000104MX	100nF				-	-	4	22	44	60	>70		
SFCML5000154MX	150nF				-	-	7	25	47	62	>70		
*SFCML2000224MX	220nF				-	200	500	-	10	29	49	66	>70
SFCML1000334MX	330nF				-	100	250	-	13	33	53	68	>70
*SFCML1000474MX	470nF				1			16	35	56	>70	>70	
SFCML0500684MX	680nF				2			19	38	58	>70	>70	

Also rated for operation at 115Vac 400Hz. Self-heating will occur - evaluation in situ recommended. * Recommended values. † Also available in COG/NP0.

Ordering Information - SFCML range

SF	C	M	L	500	0101	M	C	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Nuts & Washers
Syfer Filter	6.35mm A/F	M5	L = L-C Filter	050 = 50Vdc 100 = 100Vdc 200 = 200Vdc 500 = 500Vdc	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NP0 X = X7R	0 = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part. Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Feedthrough Filters](#) category:

Click to view products by [Knowles](#) manufacturer:

Other Similar products are found below :

[FN7561-63-M6](#) [FN7611-63-M6](#) [FN7612-10-M3](#) [FN7660-100-M8](#) [1202F-054](#) [1609991-8](#) [1609992-2](#) [16DFC6-C](#) [16FFD6-HE](#) [2-1609992-2](#)
[2443-007-X5S0-102MLF](#) [2443-007-X5W0-502ZLF](#) [1609990-8](#) [1609991-3](#) [1609992-1](#) [1609992-3](#) [1609993-1](#) [1609993-7](#) [200AFC6-P](#)
[200DFC6-P](#) [FN7510-100-M8](#) [FN7510-32-M4](#) [FN7562-100-M8](#) [FN7562-200-M10](#) [FN7563-100-M8](#) [FN7611-10-M3](#) [FN7612-63-M6](#) [2450-](#)
[001-X5U0-102PLF](#) [2499-003-X5S0-152MLF](#) [32AFC6-H](#) [4100-000LF](#) [4201-050LF](#) [4204-001LF](#) [4253-002LF](#) [4305-001LF](#) [4306-019LF](#)
[4101-004LF](#) [4201-003LF](#) [4208-000LF](#) [4600-067](#) [094-6526-0000](#) [100AFC6-G](#) [10AFC6-B](#) [10DFC6-C](#) [1-1609990-3](#) [1-1609990-7](#) [1-](#)
[1609992-8](#) [1-1609990-1](#) [1-1609991-1](#) [FN7510-16-M4](#)