


# Anti-Surge Wire-Wound Fixed Resistors

## Performance Specification

Temperature Coefficient	<20Ω: ±400PPM/°C; ≥20Ω: ±300PPM/°C
Short Time Overload	±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Dielectric Withstanding Voltage	No evidence of flashover, mechanical damage, arcing or insulation breakdown.
Pulse Overload	±(5.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Terminal Strength	No evidence of mechanical damage.
Resistance to Soldering Heat	±(1.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Solderability	Min. 95% coverage.
Temperature Cycling	±(2.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Load Life In Humidity	±(5.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Load Life	±(5.0% + 0.05Ω)Max, with no evidence of mechanical damage.
Non-Flame	No evidence of flaming or arcing
Surge Immunity (IEC 61000-4-5)	±(5.0% + 0.05Ω)Max.


## Ordering Procedure: Ex.: KNP 1W, +/-5% 100Ω, T/B-1000, AntiSurge

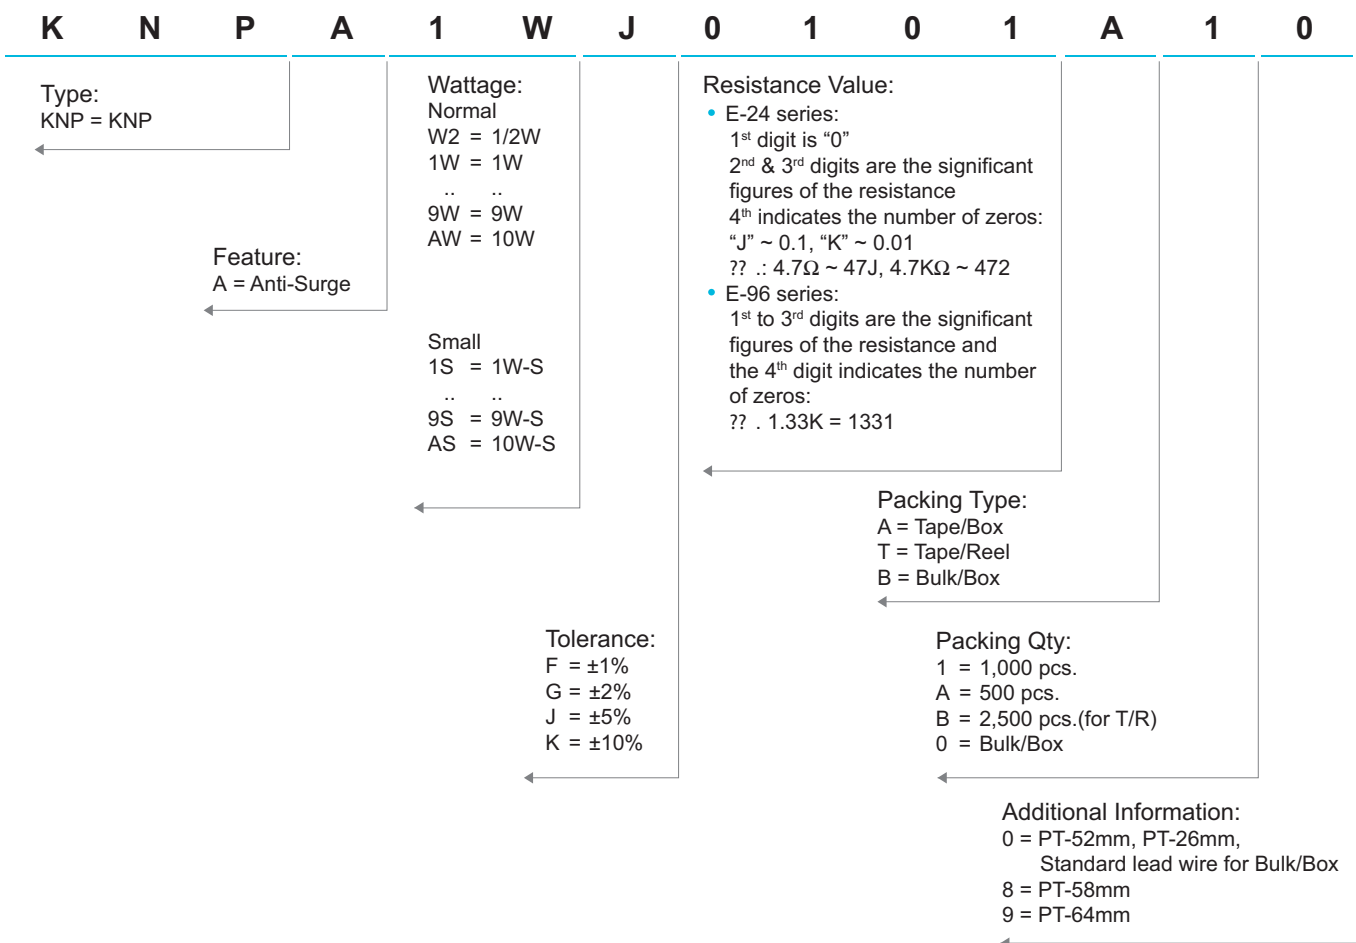


# Anti-Surge Wire-Wound Fixed Resistors

## Features

- Color coating is "Green"
- Excellent flame resistance
- Too low or too high ohmic value can be supplied on a case to case basis
- Special Fusing Wire-Wound Resistors can be supplied on a case to case basis
- Special Anti-Surge function items available (per IEC 61000-4-5)

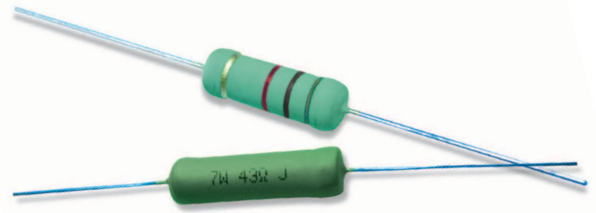

Standard : 2% ,5% ,10% -- E-24 series  
1% -- E-96 series

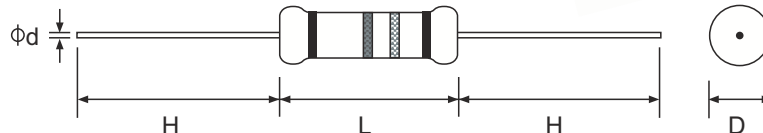


Part No.	Style	Power rating at 70°C	Dimension (mm)					Std Resistance Range	High Resistance Range	Max Surge Voltage
			D(max)	L(max)	H±3	d±0.05	PT			
<b>Normal Size</b>										
KNPAW2	KNP 50	1/2W (0.50W)	3.5	10.0	28	0.54	52	10Ω~39Ω	40Ω~560Ω	4KV
KNPA1W	KNP 100	1W	5.0	12.0	25	0.70	52	10Ω~50Ω	51Ω~1KΩ	5KV
KNPA2W	KNP 200	2W	5.5	16.0	28	0.70	64	10Ω~120Ω	121Ω~2KΩ	6KV
KNPA3W	KNP 300	3W	6.5	17.5	28	0.75	64	10Ω~200Ω	201Ω~3KΩ	7KV
KNPA5W	KNP 500	5W	8.5	25	38	0.75	B/B	10Ω~470Ω	471Ω~5KΩ	9KV
KNPA7W	KNP 700	7W	8.5	30	38	0.75	B/B	10Ω~470Ω	471Ω~6KΩ	10KV
KNPA8W	KNP 800	8W	8.5	40	38	0.75	B/B	10Ω~1.5KΩ	1.6KΩ~10KΩ	10KV
KNPA9W	KNP 900	9W	8.5	53	38	0.75	B/B	10Ω~1.5KΩ	1.6KΩ~15KΩ	10KV

Note: For KNPA Series Max. Working Voltage: 500V  
 Max. Overload Voltage: 1,000V  
 Dielectric Withstanding Voltage: 1/2W : 350V, >1/2W : 500V


The following are available on case to case basis:

- Low and high resistance
- Small size
- Higher surge voltage


Derating Curve

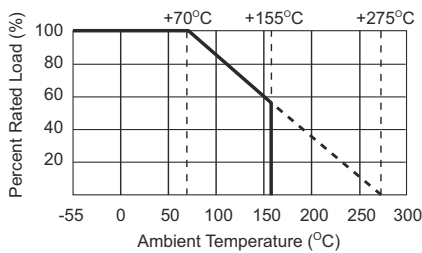

Heat Rise Chart

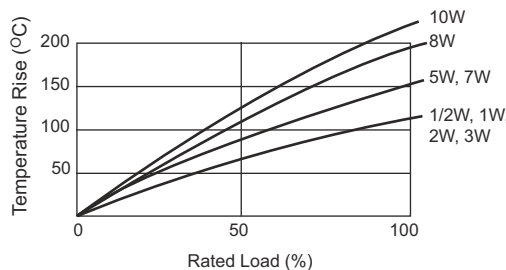

Surge Waveform (1.2/50µs)

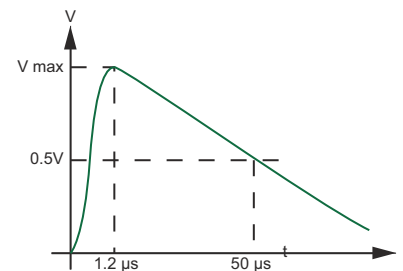

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wirewound Resistors - Through Hole category](#):*

*Click to view products by [Royal Ohm manufacturer](#):*

Other Similar products are found below :

[75822-2K4](#) [90J56R](#) [AC03000001208JAC00](#) [EP3WS47RJ](#) [C1010KJL](#) [C1015RJL](#) [C101R0JL](#) [C3A10KJT](#) [27J1K0](#) [ES3W47RJ](#)  
[AC04000001500JAC00](#) [AC10000004708JAB00](#) [SQM7-6K8](#) [SQMW5R39J](#) [SQPW5R22J](#) [SQPW5R33J](#) [1879927-3](#) [FCB2100RJ](#) [T505](#)  
[FSQ5WR47J](#) [FW10A33R0JA](#) [CPCC03R5000JB31](#) [CPCC0510R00JE32](#) [CPCC051R000JB31](#) [CPCP10500R0JE32](#) [CPW05700R0JE143](#)  
[CPW152K500JE313](#) [C1010RJL](#) [C10R47JL](#) [C141K0JL](#) [C144R7JL](#) [ES05W100RJ](#) [SQM10-1R](#) [SQM10-47R](#) [SQM5-0R47](#) [SQMW1047RJ](#)  
[CPCC03R2000JB31](#) [CPCC0515R00JE01](#) [CPW055R000JB143](#) [CPW103K300JE143](#) [CPW202R000JB14](#) [ULW5-39R0JT075](#) [W31-R47JA1](#)  
[ULW5-68RJT075](#) [SQBW401K0JFASTON](#) [SPH1001JLF](#) [65888-3R3](#) [SQP500JB-400R](#) [SQBW403R3JFASTON](#) [280-PRM7-4.7-RC](#)