

KNSCHA®

全 球 高 端 电 容 器 制 造 商

东 莞 市 科 尼 盛 电 子 有 限 公 司

DONGGUAN KNSCHA ELECTRONICS CO., LTD.

规 格 承 认 书

Specification for approval

客户名称:

深圳市立创电子商务有限公司

(Customer Name)

产品名称:

铝电解电容

(Product Name)

Aluninum Electrolytic Capacitor

客户料号 :

(Customer part number)

科尼盛料号 :

01EC6706

(KNSCHA number)

01EC6706

型号规格:

KNSCHA SHC 35V470μF Φ8*16L

(Specifications)

KNSCHA SHC 35V470μF Φ8*16L

制 造
(Manufacture)

Approval

拟 制
(Fiction)

审 核
(Chief)

核 准
(Approval)



刘淑芬

刘军军

徐贵南

客 户
(Customer)

Approval

检 验
(Inspect)

审 核
(Chief)

核 准
(Approval)

东莞市科尼盛电子有限公司

DONG GUAN KNSCHA ELECTRONICS CO.,LTD.

No. The 8th Floor, A3 Building, R&D Center (Phase I),

Songshan Lake Intelligent Valley, Liaobu Town, Dongguan City

TEL:0769-83698067 81035570

FAX: 0769-83861559

Email : sales@knscha.com Website: http://www.knscha.com



SHC Series

Aluminum Electrolytic Capacitors

Item Name	Rating	Case size	KNSCHA LifeTime
01EC6706	SHC35V470 μ F	$\Phi 8*16L$	2000Hours

1. Operating Temp. Range


-40°C ~ +105°C

2. Electrical Characteristics

[Table 1]

Rated Voltage VDC	Surge Voltage VDC	Nominal Static Capacitance (μ F)	Tolerance on Capacitance(%) 20°C 120Hz	Dissipation Factor (tan δ)max 20°C 120Hz	Leakage Current 2min. 20°C (μ A)max	Permissible Ripple Current (mArms)max 105°C 120Hz
35	44	470	-20~+20	0.12	164.5	1030

3. Dimensions

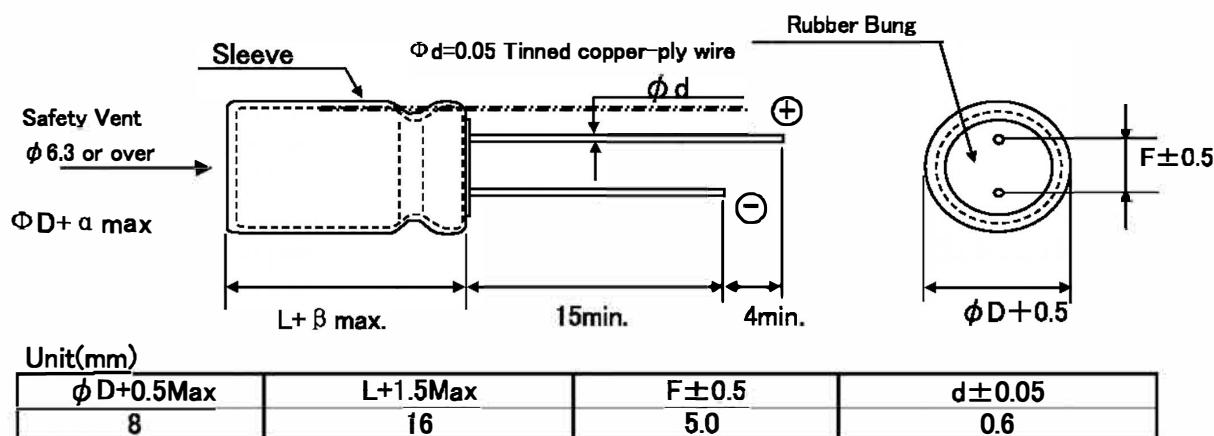

4. Marking

Following items are printed with white color on black color sleeve

Example of Marking	
35V	①
470 μ F	②
	③
KNSCHA	④
SHC	⑤
(M)105°C	

- ① Rated voltage & Nominal Capacitance
- ② Polarity (negative)
- ③ Trade Mark
- ④ Symbol of Capacitance Tolerance (M)
- ⑤ Max Operating Temp.

5. MULTIPLIER FOR RIPPLE CURRENT

① Frequency Coefficient

Cap(μ F)	Freq.(Hz) 60 (50)	120	300	1K	10K
0.1~47	0.75	1.00	1.35	1.55	2.00
68~680	0.80	1.00	1.25	1.34	1.50
1000~22000	0.85	1.00	1.10	1.13	1.15

② Temperature Coefficient

Ambient Temperature(°C)	40	60	70	85	105
Coefficient	2.40	2.10	1.78	1.65	1.00

6. Characteristics


No.	Item	Performance		Test Method											
1	Leakage Current	$I = 164.5 \mu A$ ($I=0.01CV$) $I =$ Max Leakage Current C=Cstatic Capacitor: V=Rated Voltage		Protection Resistor : $1000\pm 10\Omega$ Applied Volt : Rated Voltage Measuring time : 2minutes											
2	Static Capacitance	$376 \sim 564 \mu F$		Measured Frequency : $120Hz\pm 20\%$ Measured Voltage $\leq 0.5V_{rms}$, $1.5 \sim 2.0V_{DC}$											
3	Dissipation Factor ($\tan\delta$)	0.12 and Under		Same as condition of Capacitors											
4	High Temp. Load Charac- teristics	Leakage Current	\leq the value specified in Table 1		Test Temp. : $105\pm 2^{\circ}C$ Applied voltage: Rated voltage Test Time :2,000 hours $+72, -0$ hours										
		Cap. Change	$\leq \pm 20\%$ of initial value												
		Dissipation Factor	$\leq 200\%$ of value specified in Table												
		Appearance	No remarkable abnormality												
5	High Temp. no load Charac- teristics	Leakage Current	\leq the value specified in Table 1		Test Temp. : $105\pm 2^{\circ}C$ No voltage applied Test Time :1000 hours $+24, -0$ hrs										
		Cap. Change	$\leq \pm 20\%$ of initial value												
		Dissipation Factor	$\leq 200\%$ of value specified in Table												
		Appearance	No remarkable abnormality												
6	Terminal Strength	Tensile Strength	45N [4.5kg]		Keeping time Tensile 1~5sec Bending 30±5sec										
		Bending Strength	25N [2.5kg]												
7	Impedance Ratio	<table border="1"> <tr> <td>W</td> <td>V</td> <td>35</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td></td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td></td> <td>3</td> </tr> </table>				W	V	35	Z-25°C/Z+20°C		2	Z-40°C/Z+20°C		3	
W	V	35													
Z-25°C/Z+20°C		2													
Z-40°C/Z+20°C		3													
8	Temperature Charac - teristics	Stage	Item	Performance	Stage Test Temp(°C)										
		2,3	Impedance Ratio	less than the value mentioned in 5-7,	1 20 ± 2										
		5	Cap, Change	$\leq \pm 25\%$ against value in stage 4	2 $-25\pm 3;$ 3 $-25\pm 3;$ 4 20 ± 2 5 105 ± 2 6 20 ± 2										
		After the capacitor is held at tempereture of each stage and reaches temperature stability, measure performance.													
9	Surge Voltage	<table border="1"> <tr> <td>Item</td> <td>Perforemance</td> </tr> <tr> <td>Leakage Current</td> <td>\leq the initial specified value</td> </tr> <tr> <td>Cap, Change</td> <td>$\leq \pm 15\%$ against value before test</td> </tr> <tr> <td>Dissipation Factor</td> <td>\leq the initial specified value</td> </tr> <tr> <td>Appearance</td> <td>No remakable abnormality</td> </tr> </table>		Item	Perforemance	Leakage Current	\leq the initial specified value	Cap, Change	$\leq \pm 15\%$ against value before test	Dissipation Factor	\leq the initial specified value	Appearance	No remakable abnormality	Test Temp. $15\sim 35^{\circ}C$ Test volt. Surge Volt.Specified in 2 Voltage apply. 1,000times of chage for 30 ± 5 sec, under frequency of 6 ± 0.5 sec, and discharge for 5min30sec.	
Item	Perforemance														
Leakage Current	\leq the initial specified value														
Cap, Change	$\leq \pm 15\%$ against value before test														
Dissipation Factor	\leq the initial specified value														
Appearance	No remakable abnormality														

6-2. Characteristics

No.	Item	Performance		Test Method
10	Vibration Resistance	Capacitance Cap. Change Appearance	Stability required $\leq \pm 5\%$ of the initial specified value No remarkable abnormality	Frequency : 10~55Hz/1min. Width of vibration, 1.5mm Direction and duration X, Y and Z directions, each for 2 hours (Total 9 hours)
11	Solderability	3/4 area of surrounding directions of surface should be covered with new solder.		Solder: Sn-Ag, Sn-Cu Type Soldering Temp : $240 \pm 5^\circ\text{C}$ Dipping degree : 2~2.5mm Flux : Ethanol solution (JIS K8101) or Isopropylalchol (JIS K8839) solution of Rosin (JIS K5902)
12	Resistance to Soldering	Leakage Current Cap. Change Dissipation Factor Appearance	\leq Initial specified value $\leq \pm 10\%$ of initial value \leq Initial specified in value No remarkable abnormality	Soldering Temp. $280 \pm 5^\circ\text{C}$ Soldering Time . $10 \pm 1\text{sec.}$
13	Resistance to Humidity	Leakage Current Cap. Change Dissipation Factor Appearance	\leq Initial specified value $\leq \pm 15\%$ of initial value \leq Initial spesified value No remarkable abnormality	Test Temp. : $40 \pm 2^\circ\text{C}$ Humidity 90~95% Test Time : 500 \pm 8 hours After the above condition, restored to normal temp, and then measured.
14	Pressure valve moment characteristics	There must not be thing ignition, scattering the resolution that that case works safely		Dcmethod: impress the reverse voltage and of 1A, I cancel an electric current.

7 Packing method

5-1 Packaging shape, size, quantity

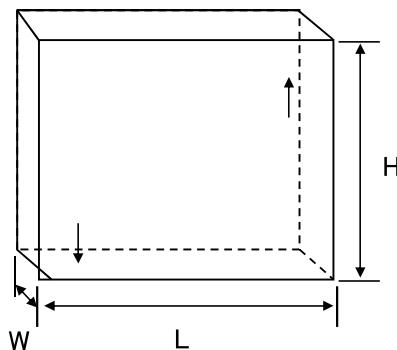

Component size	Quantity per
8*16	16000pcs.

8 Related Standards JIS C 5141

9 Marking on packing box

- ① Item name
- ② Series name
- ③ Rated Voltage
- ④ Nominal Static Capacitance
- ⑤ Case size
- ⑥ Lot No.
- ⑦ Quantity

10 Soldeing

8-1 Soldering by soldering iron

Temperature of iron top : 270~350°C

Operating time : within 3 sec.

8-2 Flow soldering.

Preheat : PCB surface temperature 120°C±5°C

Solder Temp : 260°C±5°C

Solder Dipping Temp. : 2~4sec.

11 Cleaning of PC boad after soldering

Using follwing solvents is possible but make sure following condition

Solvent

IPA or Alcoholic agent like Pinealpha ST-100S, Cleanthrough 750H, 750L, 710M, 750K, or Technocare FRW-14~17

- ① Cleaning should be made by ultrasonic within 5min, at the temperature less then 60°C.
- ② Control of pollution is necessary (conductivity,pH, specific gravity, water volume)
- ③ Please do not keep near cleaning agent. Please do not store in air-tight container.
Please let it dry by hot air at the temperature less than maximum operating temp.

12 The situation of using

Please do not use a condenser in the next use environment.

① One circumference environment(weatherability) condition.

(a) Direct water,salt water and environment oil works or become a dew condensation state.

(b) Environment full of harmful gas (a hydrogen chloride, sulfurous acid,

nitrous acid hydrochloric acid, ammonia).

(c) Ozone, infrared rays and the environment where radioactive rays are done collation of

② Vibration shock condition is extreme environment more than rule ranges of delivery specifications.

13 A country of origin

A country of origin of an SHC series alminum electrolysis condenser of specifications: China

14 Effective life for storage

Storage conditions:

① Temperature range must be between 5~35°C

② Relative humidity must be less than 75%

③ Must be stored indoor

④ Must be free from water, oil or salt water

⑤ Must be free from toxic gasses (hydrogen sulfide, sulfurous acid, chlorine, ammonium, etc.)


⑥ Must be free from ozone, ultraviolet rays or any other radiation

⑦ Must be kept in capacitor original package

I Storage life is 12 months for capacitor of rated voltage $\leq 160V$

II Storage life is 6 months for capacitor of rated voltage $\geq 200V$

Aluminum Electrolytic Capacitor SHC Series Structure

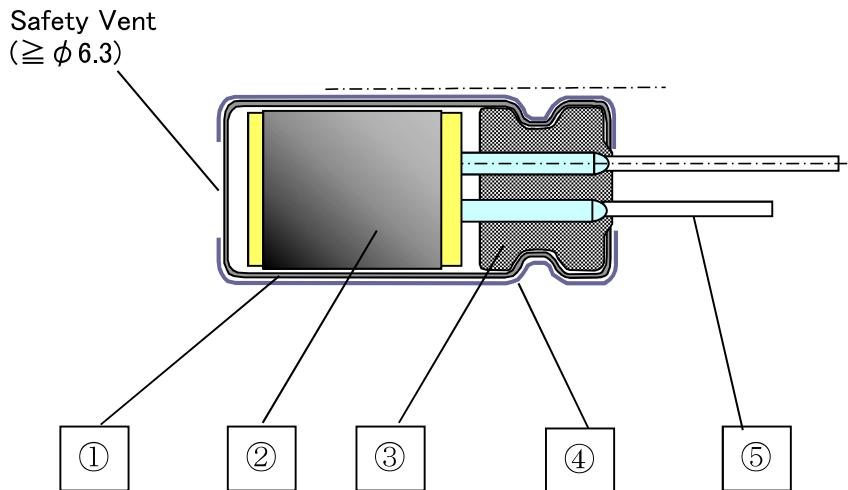

No.	Name	Material
①	Case	Aluminum
②	Element (Electrode)	High Purity Aluminum foil
	(Separator)	Manila hemp pulp
	(Electrolyte)	---
③	Rubber Bung	Synthetic Rubber
④	Sleeve	PET
⑤	Lead Wire	Tin plated Steel Wire

Controls of ozone layer destructive chemical materials

Regulated materials : CFCs, Halon, Carbon Tetrachloride, 1,1,1-Trichloroethane

The products and parts do not include the above materials

The products and parts are not used the above materials on process.

The products and parts are not used PBBOs (Poly Bromo Bi-phenyl Oxides).

All materials are mentioned as existing chemical material in the "Law of examine and control of Production of Chemical Material"

The products are not listed in Appendix 1 of Export Trade Rule and Regulation

A condenser of this series supports RoHS regulation.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [KNSCHA](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVV5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)
[6.3X11](#) [VTI100S10](#) [VTI470S10](#) [VTI470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [NEV1000M6.3DE](#)
[NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)