

客 戶 名 稱:  
CUSTOMER

產 品 名 稱:  
ITEM

AC交流滤波薄膜电容器

產 品 類 型  
CUSTOMER'S PART NO.

金属化聚丙烯盒式交流输出滤波电容器(PCB)

產 品 規 格  
CUSTOMER'S P/N:

AC filtering 20uF ± 10% 350VAC 82CB0361

日 期  
ISSUED DATE

2023/4/8

## 承认印 (APPROVAL STAMP)

供应商 (VENDER)


客户 (CUSTOMER)

- ◆ 如果您有特殊要求请联系我们，我们将提供符合您要求的产品。
- ◆ If your requirement is special please contact us, we will test products as per your requirement.

版次	日期	变更内容
----	----	------

东莞市科尼盛电子有限公司	发文部门：工程部	编号：KNS-GCAPB
	拟制：薛子文	制定日期：2023/4/10
	审核：任正非	版 本：V1.0

### 外形及结构图

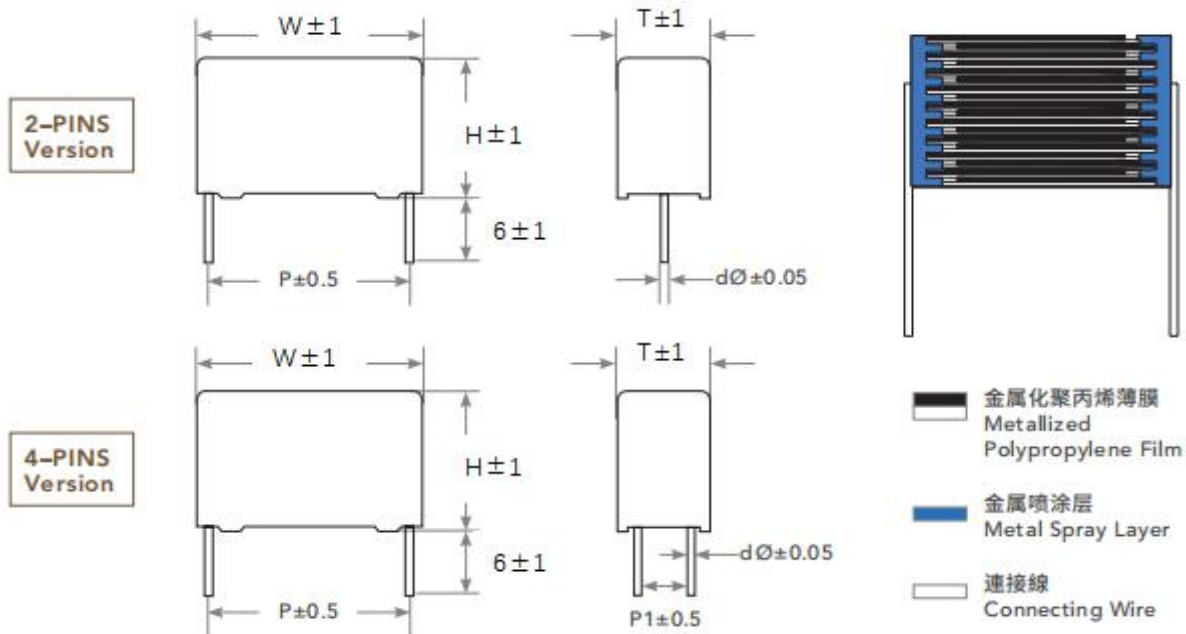

### 结构 Construction:

电介质: 金属化聚丙烯薄膜  
 Dielectric: Metallized Polypropylene Film  
 绕卷: 低感式  
 Winding: Low inductive type  
 导线: 镀锡线  
 Leads: Tinned Wire  
 外层: 阻燃塑胶外壳, 环氧树脂填充  
 Outer Coating: Flame retarding plastic case and epoxy filled

### 特点 Feature:

高电容密度  
 High Capacitance Density  
 高纹波电流  
 High Ripple Current  
 良好的自愈性  
 Self-healing properties

### 推荐应用 Recommended Application:

适用于小功率交流输出滤波电路, 如 UPS, 太阳能光伏 DC/AC 逆变器中的 LCL 滤波  
 Suitable for low-power AC output filtering circuit, such as UPS, solar photovoltaic DC/AC inverter LCL filtering

### 电气特性 Electrical Characteristics:

引用标准	GB/T 17702 (IEC 61071)
<b>Related Documents</b>	

额定均方根电压 <b>Rated root mean square voltage (Urms)</b>	180Vac	250Vac	300Vac	350Vac
额定交流电压 <b>Rated ac voltage(U<sub>N</sub>)</b>	250Vac	350Vac	425Vac	480Vac
最大连续直流电压 <b>Maximum continuous DC voltage</b>	300Vdc	475Vdc	560Vdc	600Vdc
气候类别 <b>Climatic category</b>	40/85/56			
最高工作温度(外壳温度) <b>Maximum operating temperature (Case)</b>	-40℃ ~ +105℃ 85℃ (+85℃ to +105℃: decreasing factor 1.5% per °C for Urms)			
容量误差 <b>Capacitance Tolerance</b>	±5% (J), ±10% (K)			
绝缘电阻(IR×CN) <b>Insulation Resistance</b>	≥3000S (20℃ 100Vdc 1min)			
耐电压 <b>Voltage Proof</b>	引线之间 <b>Between Terminals:</b>	1.5Un(Vac) (10s)		
	极壳之间 <b>Between Terminals to Case:</b>	3000Vac (60s)		
损耗角正切 <b>Dissipations Factor</b>	≤20 10 <sup>-4</sup> (1kHz,20℃) (Typical value,15×10 <sup>-4</sup> )			
注：若用于户外或长期湿度较大场合，建议选用防潮设计。				

**Urms=180VAC U<sub>N</sub>=300VAC U<sub>NDC</sub>=475VDC**

Cap (uF)	Dimensions(mm)			P ± 0.5	P1 ± 0.5	d ± 0.05	dV/dt (V/us)	Ls (nH)	ESR 10KHz mΩ	Irms 10KHz 70°C A	I Peak Current (A)	料号 Part Number
	W	H	T									
4.7	32	37	22	27.5	--	1.2	40	26	5.2	9	200	82CB0354
10	41.5	38	25	37.5	--	1.2	30	30	5.6	12	300	82CB0358
20	57.5	45	30	52.5	20.3	1.2	25	35	6.0	14	500	82CB0359
<b>60</b>	<b>57.5</b>	<b>56</b>	<b>42.5</b>	<b>52.5</b>	<b>20.3</b>	<b>1.2</b>	<b>25</b>	<b>30</b>	<b>3.2</b>	<b>27</b>	<b>1200</b>	<b>82CB0361</b>

**Urms=250VAC U<sub>N</sub>=350VAC U<sub>NDC</sub>=560VDC**

Cap (uF)	Dimensions(mm)			P ± 0.5	P1 ± 0.5	d ± 0.05	dV/dt (V/us)	Ls (nH)	ESR 10KHz mΩ	Irms 10KHz 70°C A	I Peak Current (A)	料号 Part Number
	W	H	T									
4.0	32	37	22	27.5	--	1.2	40	26	5.9	9	160	82CB0357
4.7	32	37	22	27.5	--	1.2	40	26	5.2	9	200	82CB0355
8.0	41.5	41	27.5	37.5	--	1.2	30	30	5.2	11	290	82CB0352
15	41.5	45	30	37.5	--	1.2	30	30	5.0	12	450	82CB0362
20	57.5	50	35	52.5	20.3	1.2	28	35	6.0	14	560	82CB0360



**Urms=350VAC U<sub>N</sub>=450VAC U<sub>NDC</sub>=600VDC**

Cap (uF)	Dimensions(mm)			P ± 0.5	P1 ± 0.5	d ± 0.05	dV/dt (V/us)	Ls (nH)	ESR 10KHz mΩ	Irms 10KHz 70°C A	I Peak Current (A)	料号 Part Number
	W	H	T									
1.5	32	37	22	27.5	--	1.0	55	28	7.3	8	82.5	82CB0353
4.7	42.5	37	22	37.5	--	1.2	30	30	6.0	12	450	82CB0356

## 薄膜电容性能参数 Electrical Characteristics of Film Capacitor



### 1. 焊接温度与时间对比

#### Soldering Temperature VS Time

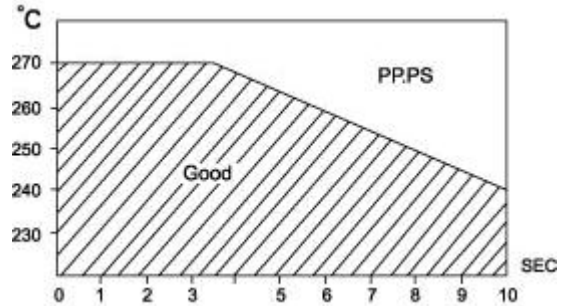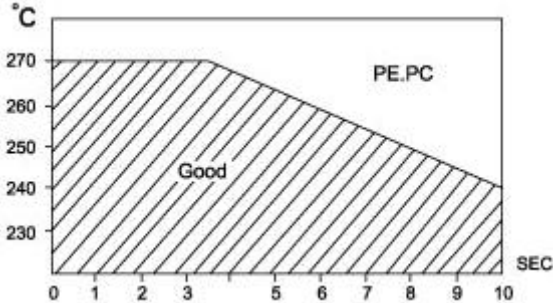


### 2. 温度性能

#### Temperature Characteristic

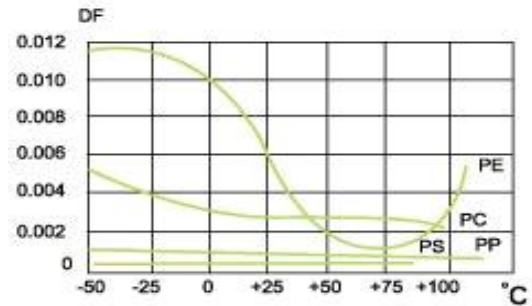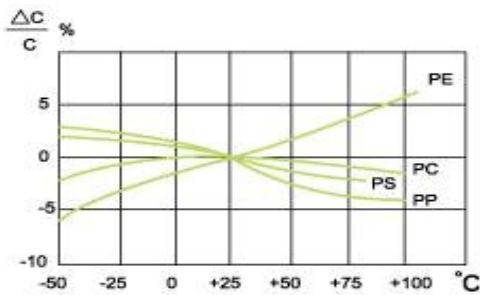


容量变化率与温度的关系

#### Capacitance vs. Temperature

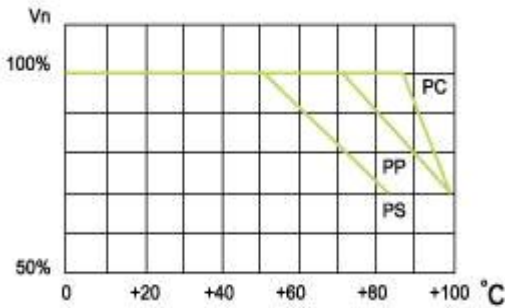

损耗角正切与温度的关系

#### Dissipation Factor vs. Temperature

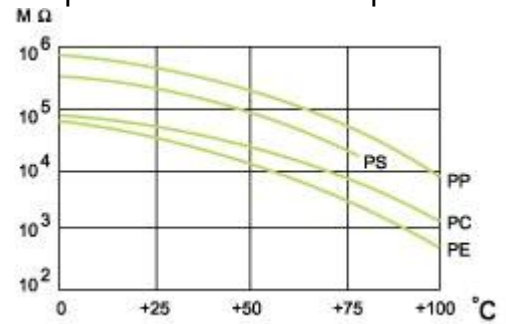



使用电压与温度的关系

#### Operation voltage vs. Temperature

#### (CR value) IR vs. Temperature

### 3. 频率性能

#### Frequency Characteristics

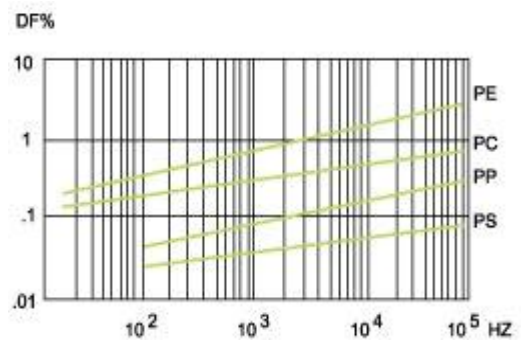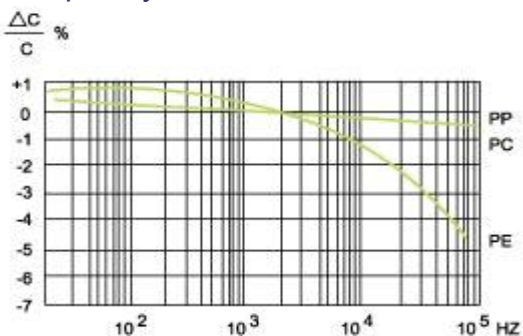

容量变化率与频率的关系

损耗角正切与频率的关系

#### Capacitance vs. Frequency

#### Dissipation Factor vs. Frequency

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Film Capacitors](#) category:*

*Click to view products by [KNSCHA](#) manufacturer:*

Other Similar products are found below :

[703-6G](#) [82DC4100CK60J](#) [82EC1100DQ50K](#) [MMWAF150KME](#) [PCY2130F30153](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [QXM2G104K](#)  
[DPM16S56K-1F](#) [EEC2G505HQA406](#) [B32234-.033@250V-K](#) [B81133-C1104-M3](#) [MTC355L1](#) [217-0716-001](#) [PA225L30](#) [CB182K0184J--](#)  
[KP1830-247/061-G](#) [274ACF4400WA0J](#) [274ACF5150WA0J](#) [SCD105K122A3-22](#) [SCD205K122A3-24](#) [PCX2339F65224](#) [PCX2339F65334](#)  
[2222 368 55105](#) [2222 370 21683](#) [QXL2E473KTPT](#) [445450-1](#) [MKT182022263473](#) [WMC08P22](#) [46KN410000N1K](#) [46KR368050M1M](#) [ECQ-](#)  
[W4223KZ](#) [EEC2G805HQA415](#) [PA103L30](#) [82DC4100AA60K](#) [82EC2150DQ50K](#) [VEA105K50](#) [82IC2150DQ50J](#) [82EC2220DQ50J](#)  
[MTC55L4](#) [MTC56L4](#) [PA104L30](#) [PA224L30](#) [82DC3220AA60J](#) [82EC4100DQ70J](#) [WYP-104M](#) [82CC4220AA70J](#) [82EC3100Z370J](#)  
[B32656S8105K566](#) [EEC2G105HQA401](#)