

Silicon Carbide MOSFET 1200V, 50m Ω

General Description


This product family offers state of the art performance. It is designed for high frequency applications here high efficiency and high reliability are required.

Features

- High voltage, low on resistance
- High speed, low parasitic capacitance
- High junction temperature
- Fast recovery diode
- Kelvin connection driver

Applications

- motor drive
- Photovoltaic inverter
- UPS power supply
- High voltage DC / DC converter
- Switching Mode Power Supply

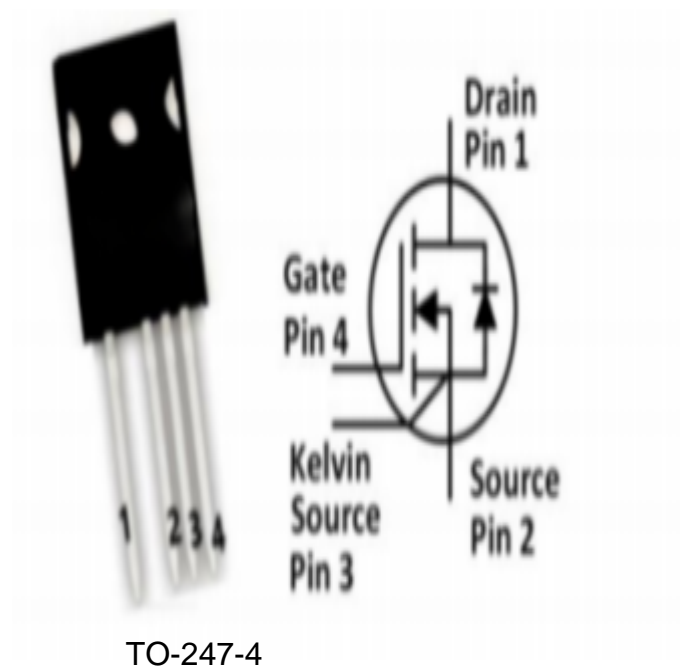

Key performance parameters

Type	V_{DS}	I_D $T_C=25^\circ C$	$R_{DS(ON)}$
KN3M0050120K	1200V	58A	50m Ω

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handing procedures.

Maximum Ratings

$T_C=25^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Drain-source voltage $V_{GS} = 0\text{V}$, $I_D = 100 \mu\text{A}$	V_{DS}	1200	V
Gate-source voltage Recommended maximum	V_{GS}	-5 to 20	V

Maximum Ratings

$T_C=25^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current : $V_{GS} = 20\text{V}$ $T_C = 25^{\circ}\text{C}$ $T_C = 100^{\circ}\text{C}$	I_D	58 43	A
Pulsed drain current: Pulse width limited by SOA	I_{DM}	145	A
Power dissipation : $T_C = 25^{\circ}\text{C}$	P_{TOT}	344	W
Storage temperature range :	T_{stg}	-55 to +175	$^{\circ}\text{C}$
Operating and junction temperature:	T_j	-55 to +175	$^{\circ}\text{C}$
Soldre temperature: Wave soldering only allowed at leads, 1.6 mm from case for 10 s	T_L	260	$^{\circ}\text{C}$

Thermal Resistance

Parameter	Symbol	Typ.	Unit
Thermal resistance to shell	R_{thJC}	0.436	$^{\circ}\text{C}/\text{W}$

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handing procedures.

Electrical Characteristic

$T_C = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value			Unit	Test Condition
		Min.	Typ.	Max.		
Zero gate voltage drain current	I_{DSS}		5	100	μA	$V_{DS} = 1200\text{V}$ $V_{GS} = 0\text{V}$
Gate leakage current	I_{GSS}		1	± 100	nA	$V_{DS} = 0\text{V}$ $V_{GS} = -5\sim 20\text{V}$
Gate threshold voltage	V_{TH}		3.2 2.2		V	$V_{GS} = V_{DS}$ $I_D = 6\text{mA}$ $T_C = 175^\circ\text{C}$
Drain-source on-state resistance	R_{ON}		50 80	65	$\text{m}\Omega$	$V_{GS} = 20\text{V}$ $I_D = 20\text{A}$ $T_J = 25^\circ\text{C}$ $T_J = 175^\circ\text{C}$
Input capacitance	C_{iss}		2750		pF	$V_{DS} = 800\text{V}$ $V_{GS} = 0\text{V}$ $f = 1\text{MHz}$ $V_{AC} = 25\text{mV}$
Output capacitance	C_{oss}		106			
Reverse transfer capacitance	C_{rss}		5.2			
The output capacitor stores energy	E_{oss}		43		μJ	
Total gate charge	Q_g		120		nC	$V_{DS} = 800\text{V}$ $I_D = 20\text{A}$ $V_{GS} = -5\text{ to }20\text{V}$
Gate to source charge	Q_{gs}		25			
Gate to drain charge	Q_{gd}		48			
Gate input resistance	R_g		2.8		Ω	$f = 1\text{MHz}$
Turn-on switching energy	E_{ON}		455.4		μJ	$V_{DS} = 800\text{V}$, $I_D = 30\text{A}$, $V_{GS} = -2\text{ to }20\text{V}$, $R_{G(\text{ext})} = 3.3\Omega$, $L = 450\mu\text{H}$
Turn-off switching energy	E_{OFF}		213.6		μJ	
Turn-on delay time	$t_{d(\text{on})}$		8.9		ns	
Rise time	t_r		28.9			

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handing procedures.

Turn-off delay time	$t_{d(off)}$		25.6			
Fall time	t_f		17.2			

Reverse Diode Characteristics

$T_c = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value			Unit	Test Condition
		Min.	Typ.	Max.		
Diode forward voltage	V_{SD}		4.9 4.4		V	$I_{SD} = 20\text{A}$ $V_{GS} = 0\text{V}$ $T_J = 175^\circ\text{C}$
Reverse recovery time	t_{rr}		44.4		ns	$V_{GS} = -2\text{V}/+20\text{V}$, $I_{SD} = 30\text{A}$, $V_R = 800\text{V}$, $di/dt = 1000\text{A}/\mu\text{s}$, $R_{G(ext)} = 10\ \Omega$ $L = 450\ \mu\text{H}$
Reverse recovery charge	Q_{rr}		212.6		nC	
Reverse recovery peak current	I_{RRM}		10.8		A	

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handling procedures.

Characteristics Curves

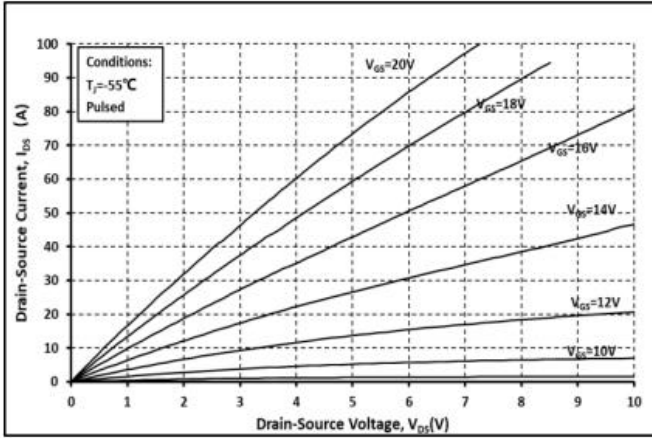


图. 1 输出曲线 @ $T_j = -55^\circ\text{C}$

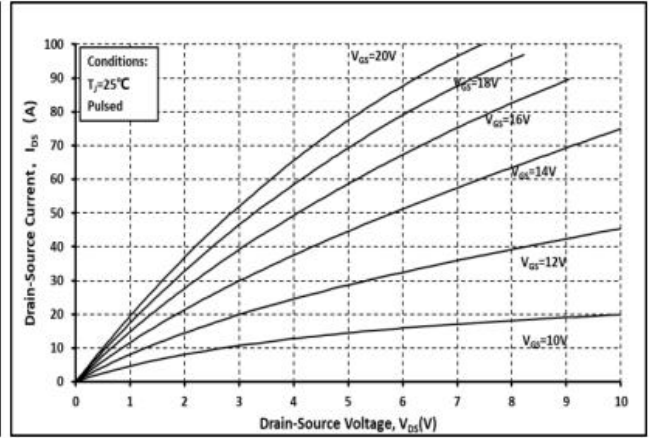


图. 2 输出曲线 @ $T_j = 25^\circ\text{C}$

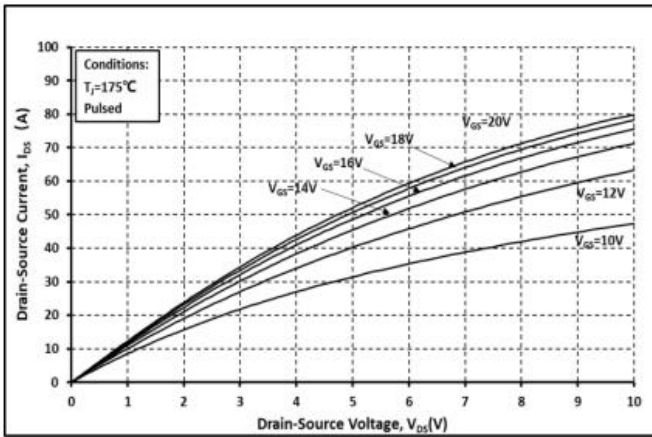


图. 3 输出曲线 @ $T_j = 175^\circ\text{C}$

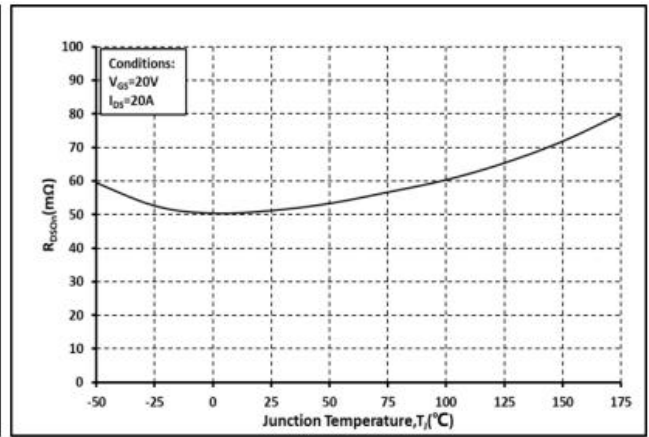


图. 4 R_{on} 和温度关系曲线

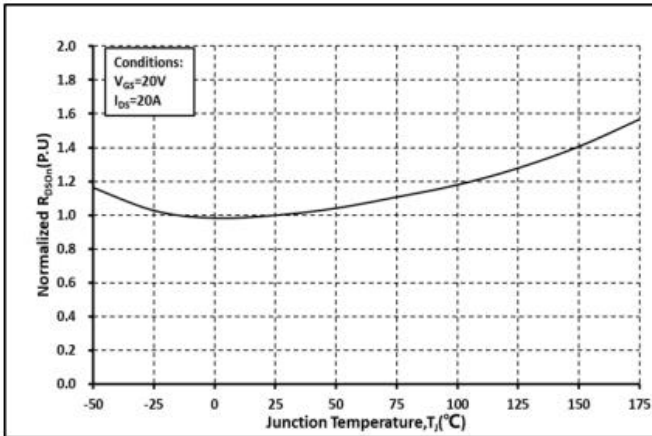


图. 5 归一化的 R_{on} 和温度关系曲线

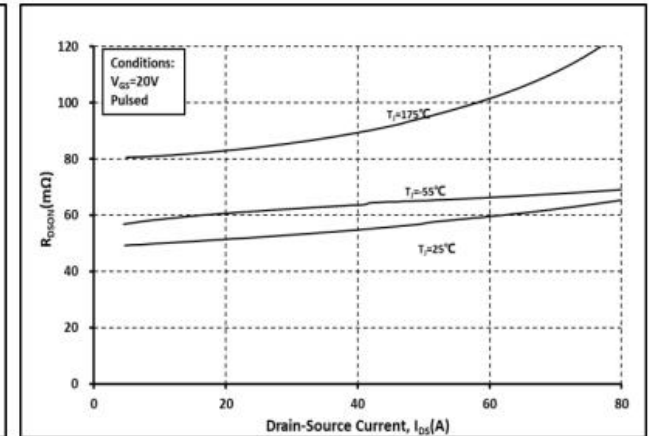


图. 6 各温度下的 R_{on} 和 I_{DS} 关系曲线

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures.

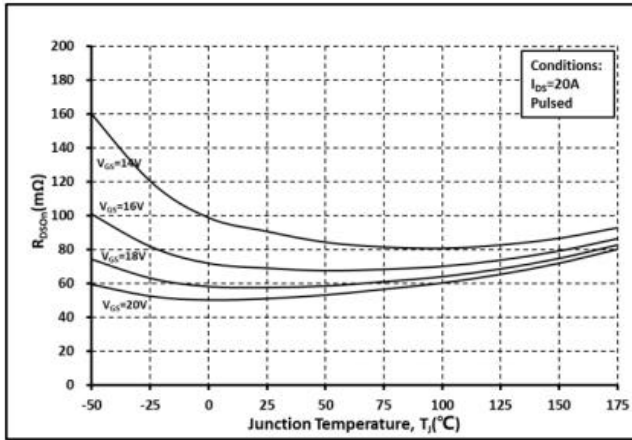


图. 7 各 V_{GS} 下的 R_{on} 和温度关系曲线

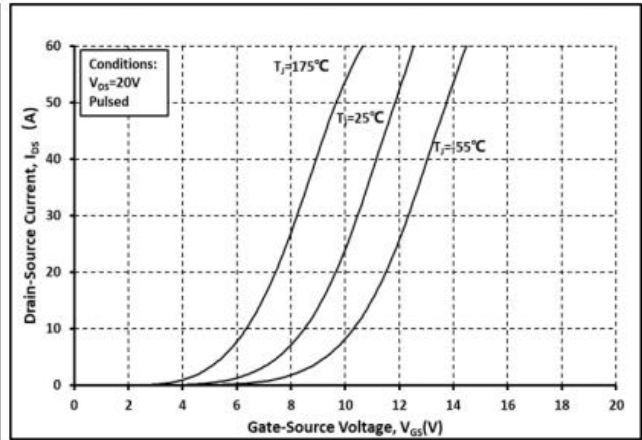


图. 8 各温度下的传输特性曲线

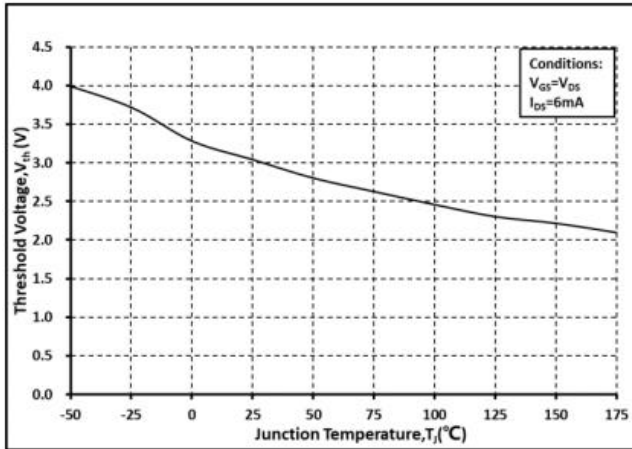


图. 9 阈值电压随温度变化曲线

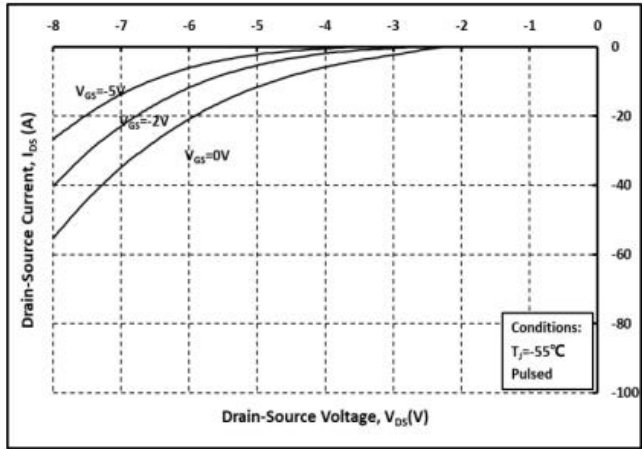


图. 10 体二极管导通曲线 @ $T_j = -55^\circ\text{C}$

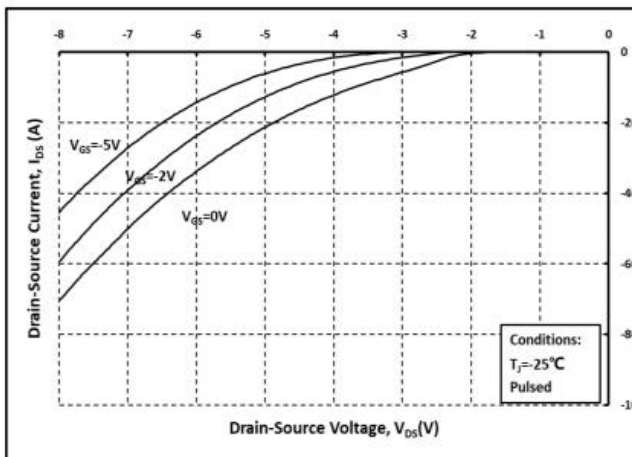


图. 11 体二极管导通曲线 @ $T_j = 25^\circ\text{C}$

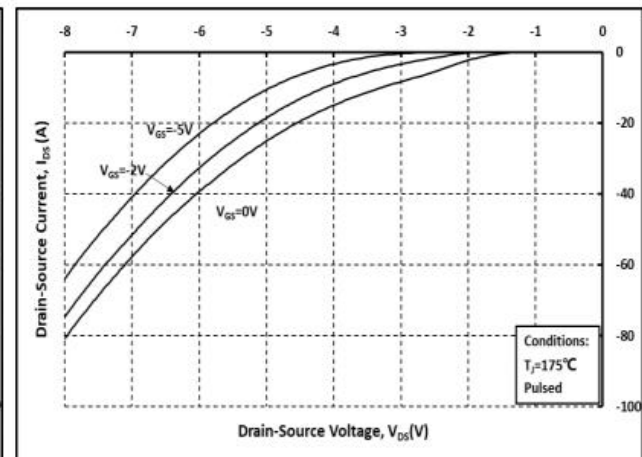


图. 12 体二极管导通曲线 @ $T_j = 175^\circ\text{C}$

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handling procedures.

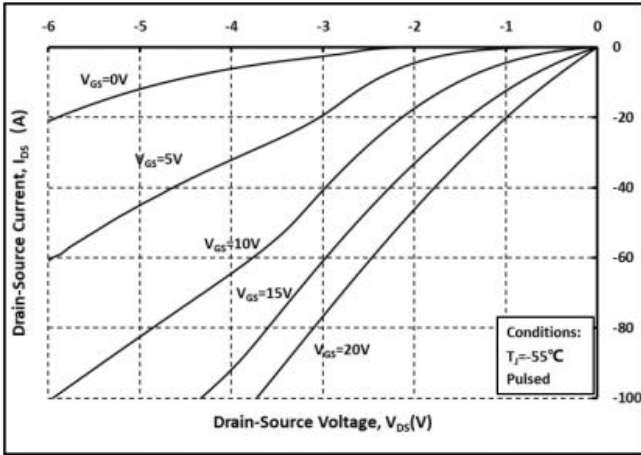


图. 13 第三象限曲线 @ $T_j = -55^\circ\text{C}$

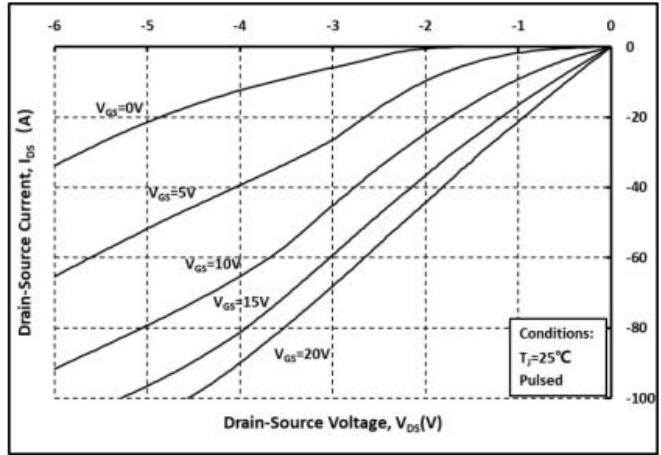


图. 14 第三象限曲线 @ $T_j = 25^\circ\text{C}$

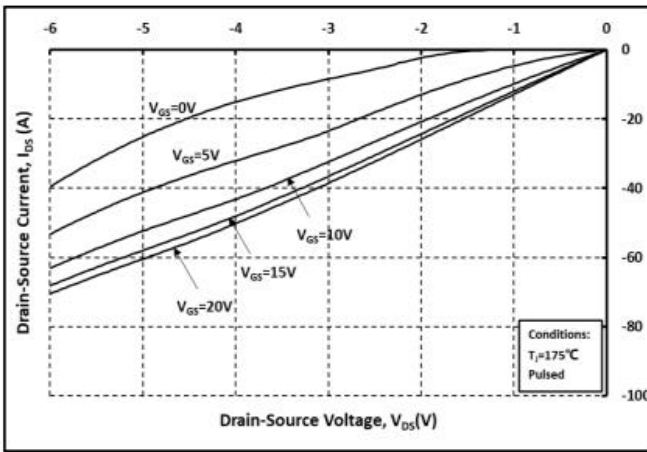


图. 15 第三象限曲线 @ $T_j = 175^\circ\text{C}$

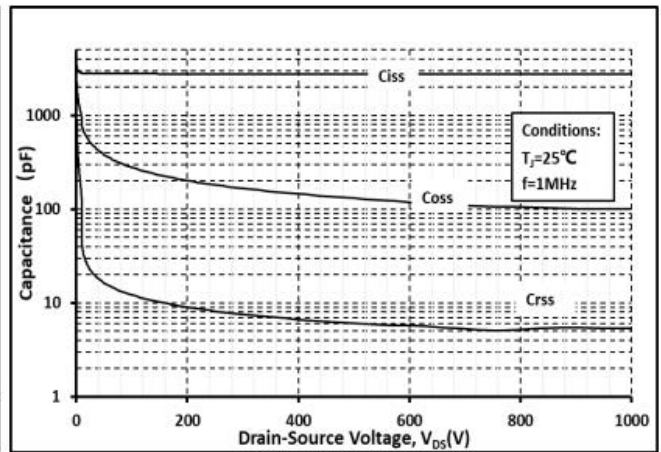


图. 16 各电容和 V_{DS} 关系曲线

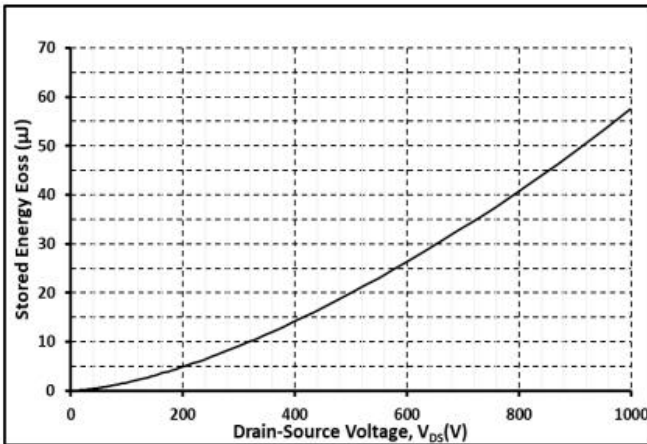


图. 17 输出电容存储能量曲线

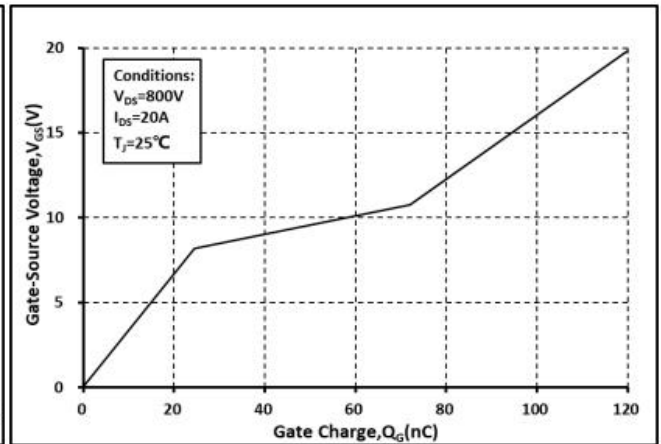


图. 18 栅电荷特征曲线

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handling procedures.

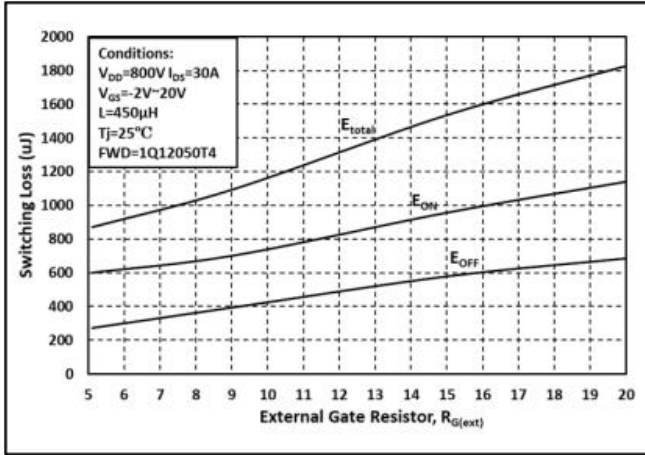


图. 19 开关能量和栅极电阻 $R_{G(ext)}$ 关系曲线

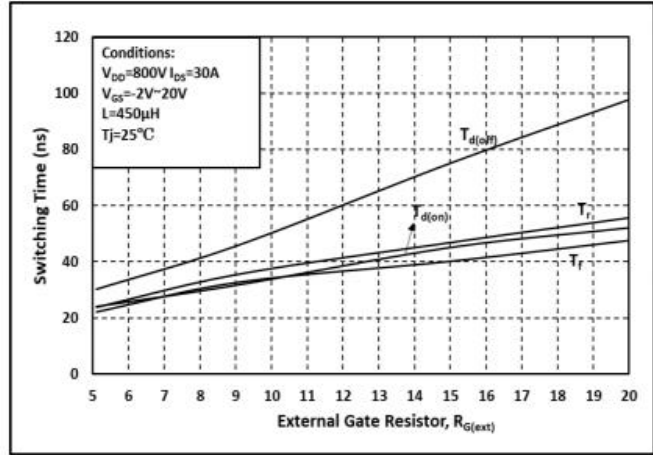


图. 20 开关时间和栅极电阻 $R_{G(ext)}$ 关系曲线

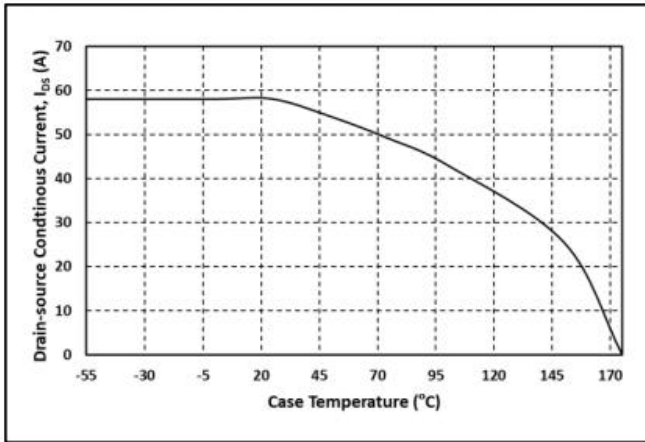


图. 21 漏端电流和温度关系曲线

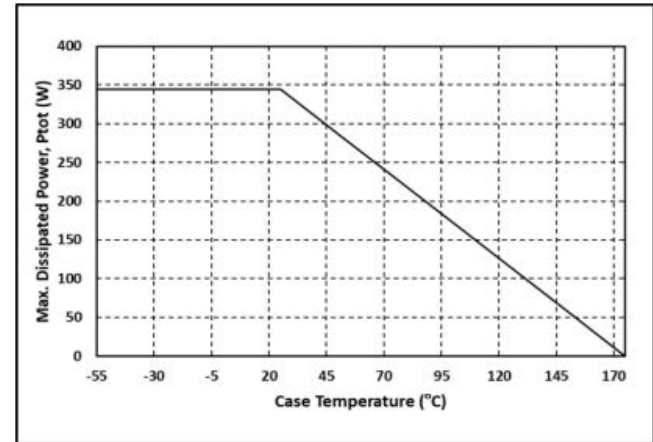


图. 22 最大功耗降额和温度关系曲线

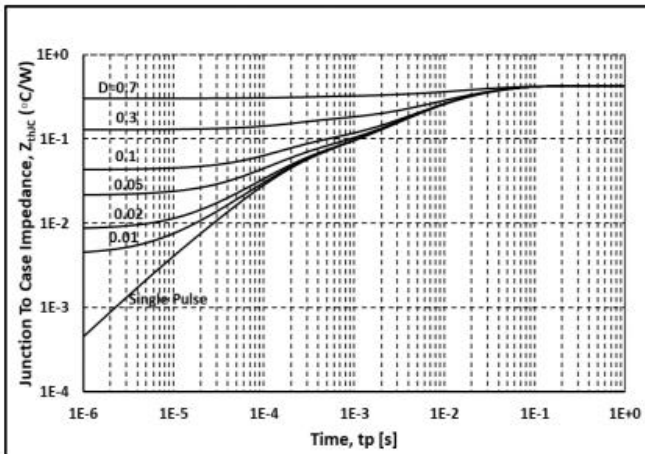


图. 23 热阻曲线


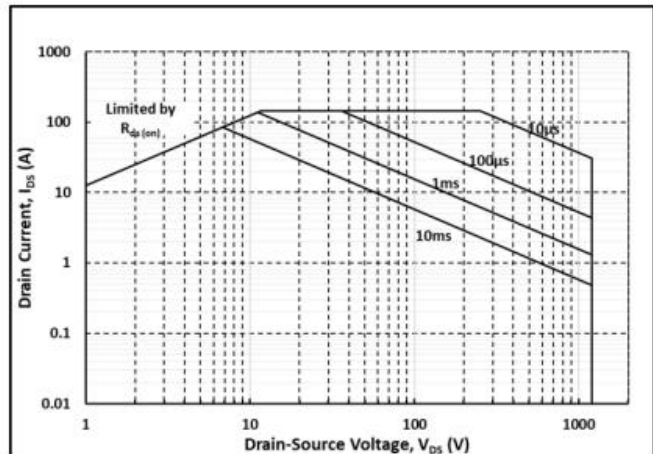




图. 24 安全工作区示意图

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handing procedures.


Package Outline: TO-247-4

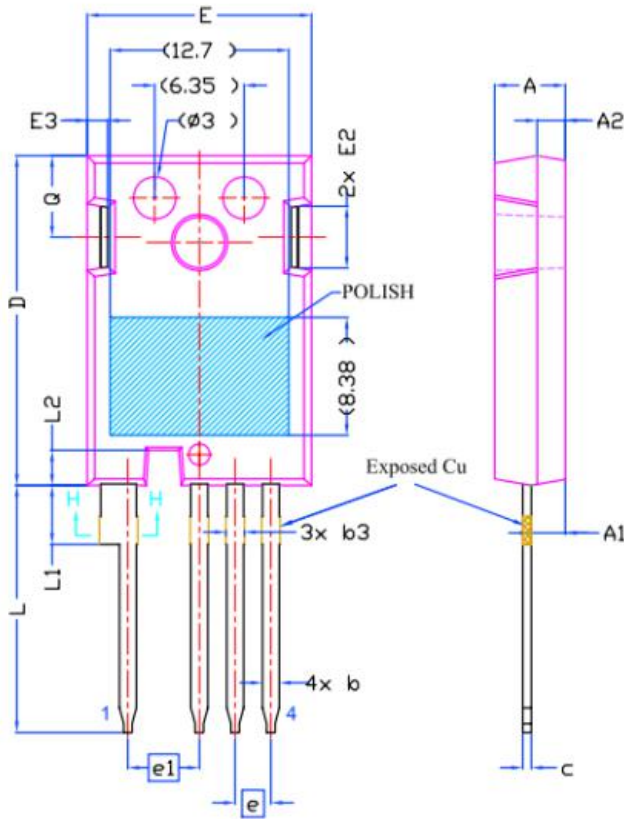

SYMBOL	DIMENSIONS		
	MIN.	NOM.	MAX.
A	4.83	5.02	5.21
A1	2.29	2.41	2.54
A2	1.91	2.00	2.16
b'	1.07	1.20	1.28
b	1.07	1.20	1.33
b1	2.39	2.67	2.94
b2	2.39	2.67	2.84
b3	1.07	1.30	1.60
b4	1.07	1.30	1.50
b5	2.39	2.53	2.69
b6	2.39	2.53	2.64
c	0.55	0.60	0.68
c1	0.55	0.60	0.65
D	23.30	23.45	23.60
D1	16.25	16.55	17.65
D2	0.95	1.19	1.25
E	15.75	15.94	16.13
E1	13.10	14.02	14.15
E2	3.68	4.40	5.10
E3	1.00	1.45	1.90
E4	12.38	13.26	13.43
e	2.54 BSC		
e1	5.08 BSC		
L	17.31	17.57	17.82
L1	3.97	4.19	4.37
L2	2.35	2.50	2.65
ϕP	3.51	3.61	3.65
$\phi P1$	7.19 REF.		
Q	5.49	5.79	6.00
S	6.04	6.17	6.30

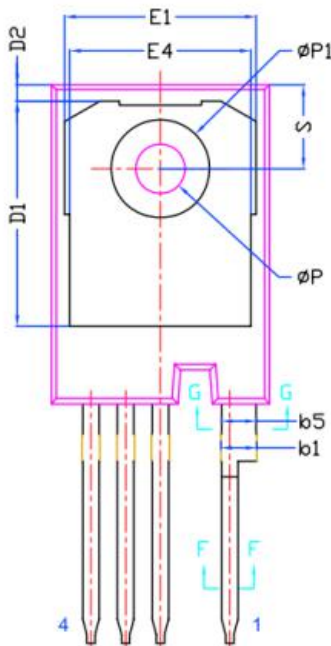

Recommended Solder Pad Layout

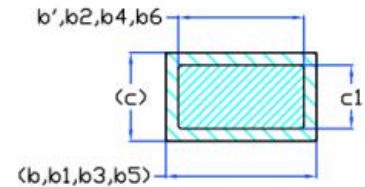

Section F--F, G--G, H--H

说明:

1. 封装标准参考: JEDEC TO247, Variation AD
2. 以上单位为: 毫米
3. 需要开槽, 槽口可为圆形
4. 尺寸 D 和 E 不包括模具溢料

Caution: This device is sensitive to electrostatic discharge .Users should follow ESD handling procedures.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [KNSCHA](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#)
[WMJ80N60C4](#) [BXP2N20L](#) [BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTGR](#) [DMNH15H110SK3-13](#)
[SLF10N65ABV2](#) [BSO203SP](#) [BSO211P](#) [IPA60R230P6](#)