


## bussed concave termination square corner resistor array



### features

- Manufactured to type RK73 standards
- Less board space than individual chips
- Four or eight bussed resistor elements included in one array, concave terminations
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.

### dimensions and construction

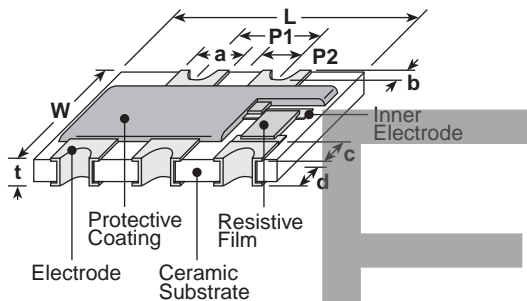


Size Code	Dimensions inches (mm)									
	L	W	t	P1	P2	a (top)	a (bot.)	b (ref.)	c (ref.)	d
2B9Z	.252±.008 (6.4±0.2)	.126±.008 (3.2±0.2)	.024±.004 (0.6±0.1)	.051±.004 (1.3±0.1)	.026±.004 (0.65±0.1)	.024±.004 (0.6±0.1)	.024±.004 (0.6±0.1)	.006 (0.15)	.018±.008 (0.45±0.2)	.024±.006 (0.6±0.15)
2E5Z	.126±.008 (3.2±0.2)	.098±.008 (2.5±0.2)	.024±.004 (0.6±0.1)	.039±.004 (1.0±0.1)	.020±.004 (0.50±0.1)	.022±.004 (0.55±0.1)	.022±.004 (0.55±0.1)	.006 (0.15)	.012±.006 (0.3±0.15)	.020±.006 (0.5±0.15)

### ordering information

CNB	2B	9	Z	T	TE	103	J
Type	Size	Elements	Circuit Symbol	Termination Material	Packaging	Nominal Resistance	Tolerance
	2B 2E	5 9	Z: A parallel circuit with staggered terminals and a common electrode on #1 terminal	T: Sn (Other termination styles may be available, please contact factory for options)	TE: 7" embossed plastic	2 significant figures + 1 multiplier	J: ±5%

For further information on packaging, please refer to Appendix A.

### circuit schematics

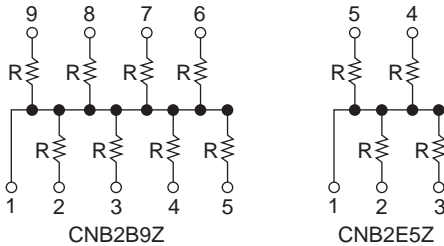


### applications and ratings

Part Designation	Power Rating @ 70°C (Per Element)	Rated Ambient Temperature	T.C.R. (ppm/°C) Max.	Resistance Range E-3*	Resistance Tolerance	Absolute Maximum Working Voltage	Maximum Overload Voltage (5 Secs. Max.)	Operating Temperature Range
CNB2B9Z	1/16W (.063W)	±70°C	±200	1kΩ - 470kΩ	J: ±5%	50V	100V	-55°C to +125°C
CNB2E5Z								


\* E-3 significant figures (per decade) are 1.0, 2.2 and 4.7.

### environmental applications

#### Derating Curve

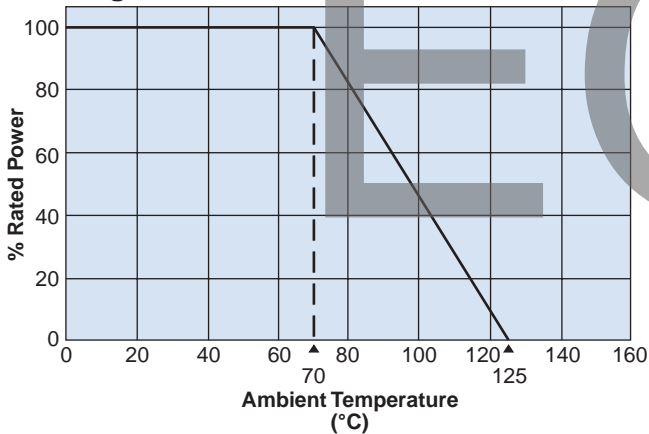

#### Circuit Board Application

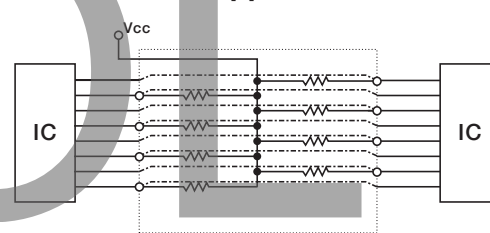

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

### Performance Characteristics

Parameter	Requirement $\Delta R \pm(\%+0.1\Omega)$		Test Method
	Limit	Typical	
Resistance	Within regulated tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/-55°C, +25°C/+125°C
Overload (Short time)	±2.0%	±0.5%	Rated voltage x 2.5 for 5 seconds
Resistance to Solder Heat	±1.0%	±0.25%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±1.0%	±0.1%	-55°C (30 minutes), +125°C (30 minutes), 5 cycles
Moisture Resistance	±5.0%	±1.0%	40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 70°C	±5.0%	±0.5%	70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±1.0%	±0.2%	+125°C, 1000 hours

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resistor Networks & Arrays](#) category:*

*Click to view products by [KOA Speer](#) manufacturer:*

Other Similar products are found below :

[M8340105K1002FGD03](#) [M8340105K3301JCD03](#) [M8340106M2002GCD03](#) [M8340107K1471FGD03](#) [M8340107K2002GCD03](#)  
[M8340107K2261FGD03](#) [M8340107M1501GGD03](#) [M8340108K1001FCD03](#) [M8340108K1003FCD03](#) [M8340108K2402GGD03](#)  
[M8340108K3240FGD03](#) [M8340108K6192FGD03](#) [M8340109K2872FCD03](#) [M8340109M4701GCD03](#) [M8340109MA010GHD03](#) [EXB-](#)  
[24N121JX](#) [EXB-24N330JX](#) [EXB-24N470JX](#) [744C083101JTR](#) [EXB-U14360JX](#) [EXB-U18390JX](#) [744C083270JTR](#) [745C102472JP](#)  
[767161104G](#) [MDP1603100KGE04](#) [770101223](#) [ACAS06S0830339P100](#) [ACAS06S0830343P100](#) [ACAS06S0830344P100](#) [RM2012A-](#)  
[102/104-PBVW10](#) [RM2012A-102503-PBVW10](#) [8B472TR4](#) [268-15K](#) [ACAS06S0830341P100](#) [ACAS06S0830342P100](#)  
[ACAS06S0830345P100](#) [EXB-U14470JX](#) [EXB-U18330JX](#) [266-10K](#) [M8340105M1001JCD03](#) [M8340106K4701GGD03](#)  
[M8340107K1004GGD03](#) [M8340107K3402FCD03](#) [M8340108K1000GGD03](#) [M8340108K1202GGD03](#) [M8340108K3901GGD03](#)  
[M8340108K4992FGD03](#) [M8340108K5111FGD03](#) [M8340109K2202GCD03](#) [RKC8BD104J](#)