


features


- Fast reverse recovery time
- Fast turn on time
- Low capacitance
- SMD packages
- 16 kV IEC61000-4-2 capable
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

dimensions and construction

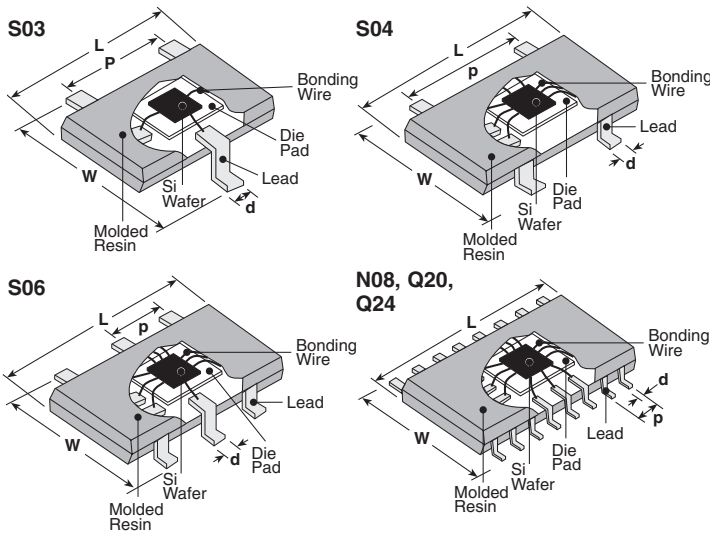

| Package Code | Total Power | Pins | Dimensions inches (mm) | | | | |
|--------------|-------------|------|------------------------|----------------|-----------------|----------------|----------------|
| | | | L ±0.2 | W ±0.2 | p ±0.1 | Pkg Ht ±0.2 | d ±0.05 |
| S03 | 225mw | 3 | .115 (2.92) | .091 (2.30) | .075 (1.91) | .037 (0.95) | .017 (0.43) |
| S04 | 225mw | 4 | .115 (2.92) | .091 (2.30) | .075 (1.91) | .037 (0.95) | .017 (0.43) |
| S06 | 225mw | 6 | .115 (2.92) | .110 (2.80) | .037 (0.95) | .037 (0.95) | .017 (0.43) |
| N08 | 400mw | 8 | .190 (4.83) | .236 (5.99) | .050 (1.27) | .063 (1.60) | .016 (0.41) |
| Q20 | 1000mw | 20 | .341 (8.66) | .236 (5.99) | .025 (0.635) | .063 (1.60) | .010 (0.25) |
| Q24 | 1000mw | 24 | .341 (8.66) | .236 (5.99) | .025 (0.635) | .063 (1.60) | .010 (0.25) |

circuit schematic

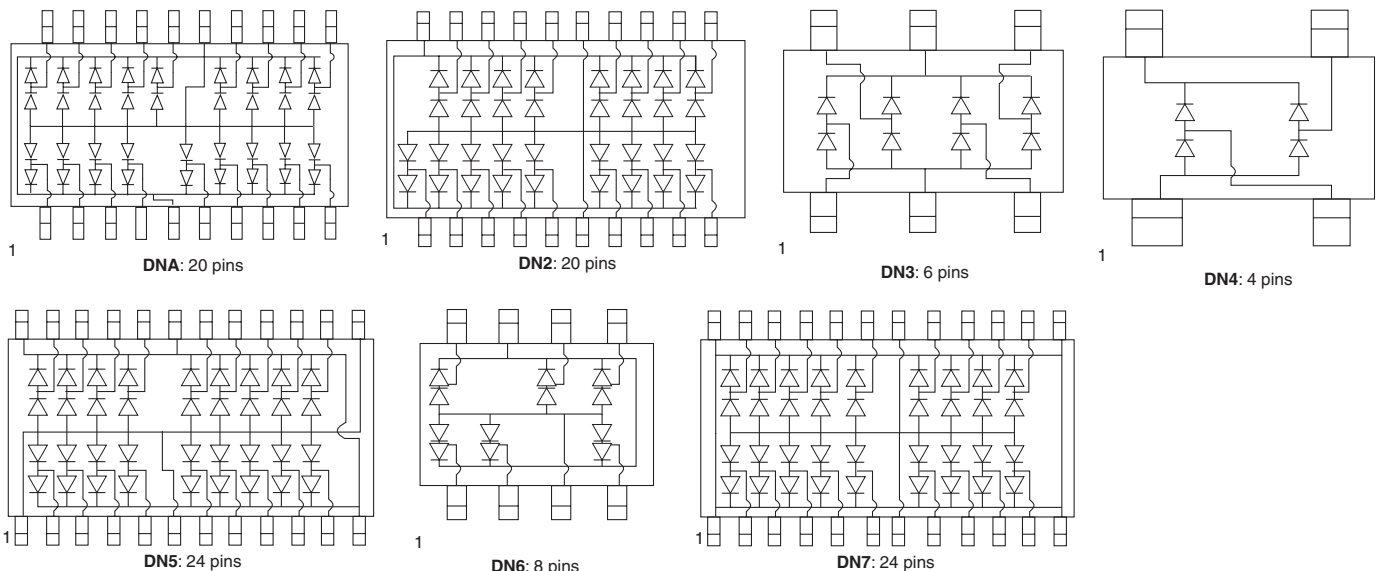

For further information on packaging, please refer to Appendix A.


ordering information

| DNA | Q20 | T | TEB |
|---|--|--|---|
| Type | Package Symbol | Termination Material | Packaging |
| DNA DN2 DN3 DN4 DN5 DN6 DN7 | Package type symbol + number of pins S03: 3 pin SOT23 S04: 4 pin SOT23 S06: 6 pin SOT23 N08: 8 pin Narrow SOIC Q20: 20 pin QSOP Q24: 24 pin QSOP | T: Sn (Other termination styles available, contact factory for options) | TE: 7" embossed plastic (SOT23 only) TEB: 13" embossed plastic |


For further information on packaging, please refer to Appendix A.

application schematic

ESD Suppression

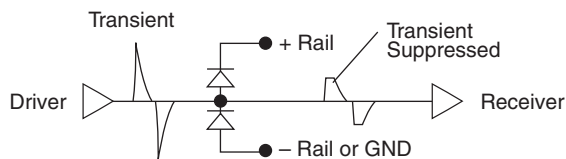

Signal Conditioning

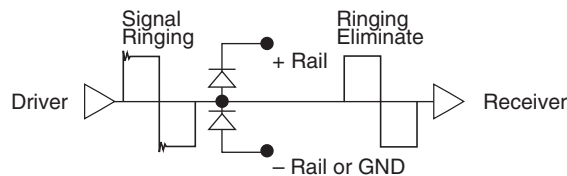

applications and ratings

| Part Designation | Forward Voltage $I_F=50\text{ma}$ | Reverse Breakdown Voltage $I_R=1\text{ma}$ | Leakage Current @7V | Capacitance @1Mhz | ESD Voltage Capability IEC 61000-4-2 | Operating Temperature Range | Continuous Forward Current* |
|------------------|--------------------------------------|---|------------------------|----------------------|---|-----------------------------|-----------------------------|
| DN(X) | 0.4 to 1.2V | 7.2V | 1uA | 2pF | 16kV | -55°C to +155°C | 50mA |

* One diode conducting

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [KOA Speer](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0F4U5P5-7](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#)
[P6KE39CA-TP](#) [P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD112-B1-02EL E6327](#)
[ESD119B1W01005E6327XTSA1](#) [ESD5V0J4-TP](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [82356240030](#)
[VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#)
[D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)