


features

- Miniature construction can endure to high voltage and high power
- Excellent in anti-surge characteristics
- Wide resistance range of 0.5MΩ - 10GΩ and small T.C.R.
- Product meets EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in resistor element and brass cap.


dimensions and construction

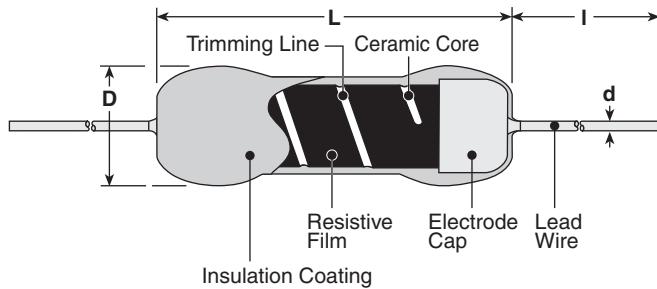

Type	Dimensions inches (mm)			
	L	D	d (Nominal)	l
GS 1/4	.248±.039 (6.3±1.0)	.091±.020 (2.3±0.5)	.026 (0.65)	1.50±.118 (38.0±3.0)
GS 1/2	.374±.039 (9.5±1.0)	.138±.024 (3.5±0.6)	.031 (0.8)	
GS 1	.591±.059 (15.0±1.5)	.177±.039 (4.5±1.0)		
GS 2	.945±.059 (24.0±1.5)	.311±.039 (7.9±1.0)	.039 (1.0)	1.50±.118 (38.0±3.0)
GS 3	2.05±.079 (52.0±2.0)			
GS 5	2.99±.079 (76.0±2.0)			
GS 7	3.82±.118 (97.0±3.0)			
GS 10	4.61±.118 (117.0±3.0)			
GS 12	5.39±.118 (137.0±3.0)			


leaded resistors

Derating Curve

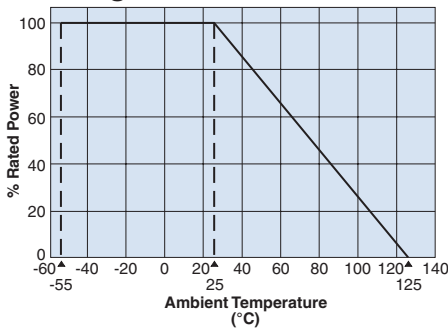

For resistors operated at an ambient temperature of 25°C or above, a power rating shall be derated in accordance with the above derating curve.

Surface Temperature Rise

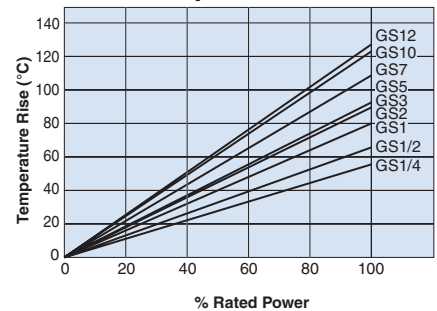

ordering information

GS	1/2	L	C	106	J
Type	Power Rating	T.C.R.	Termination Surface Material	Nominal Resistance	Resistance Tolerance
	1/4: 0.25W 1/2: 0.5W 1: 1W 2: 2W 3: 3W 5: 5W 7: 7W 10: 10W 12: 12W	D: ±100 L: ±200 Packaging Quantity: GS1/4: 1000 pieces GS1/2, GS1: 2000 pieces GS2, GS3, GS5: 500 pieces GS7, GS10, GS12: 250 pieces Custom forming for all sizes and custom taping for GS1/4 - GS1/2 are available upon request.	C: SnCu	±2%, ±5%, ±10%: 2 significant figures + 1 multiplier ±0.5%, ±1%: 3 significant figures + 1 multiplier	D: ±0.5% F: ±1% G: ±2% J: ±5% K: ±10%

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

4/15/15

applications and ratings

leaded resistors

Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range (Ω)					Max. Working Voltage	Max. Overload Voltage	Impulse Withstand Voltage	Rated Ambient Temperature	Operating Temperature Range
			E-24 & 25, 50x10 ⁿ									
			(D±0.5%)	(F±1%)	(G±2%)	(J±5%)	(K±10%)					
GS1/4*	0.25W	D: ±100	500K-20M					0.5kV	1kV	1.25kV	+25°C	-55°C to +125°C
		L: ±200										
GS1/2*	0.5W	D: ±100					1kV	2kV	2.5kV			
		L: ±200										
GS1	1W	D: ±100		500K	-100M		3kV	4.5kV	6kV			
		L: ±200										
GS2	2W	D: ±100	500K-50M				5kV	7.5kV	10kV			
		L: ±200										
GS3	3W	D: ±100					15kV	20kV	30kV			
		L: ±200										
GS5	5W	D: ±100					20kV	30kV	40kV			
		L: ±200										
GS7	7W	D: ±100	1M-50M	1M-100M	1M-500M	1M-500M	1M-500M	30kV	40kV	50kV		
		L: ±200	500K-50M	500K-100M	500K-1G	500K-10G	500K-10G					
GS10	10W	D: ±100	1M-50M	1M-100M	1M-500M	1M-500M	1M-500M	35kV	50kV	60kV		
		L: ±200	500K-50M	500K-100M	500K-1G	500K-10G	500K-10G					
GS12	12W	D: ±100	1M-50M	1M-100M	1M-500M	1M-500M	1M-500M	40kV	60kV	70kV		
		L: ±200	500K-50M	500K-100M	500K-1G	500K-10G	500K-10G					

* Taping packaging is available for GS1/4 and GS1/2. Please contact factory.

environmental applications

Performance Characteristics

Parameter	Requirement Δ R ±%	Test Method
Resistance	Within regulated tolerance	25°C
T.C.R.	Within specified T.C.R.	+25°C/125°C
Overload (Short time)	2%: TCR 200x10 ⁻⁶ /K 0.5%: TCR 100x10 ⁻⁶ /K	Rated voltage x 2.5 (GS1/4, GS1/2), rated voltage x 2 (GS1-GS12) or Max. overload voltage, whichever is lower for 5 seconds
Resistance to Solder Heat	2%: TCR 200x10 ⁻⁶ /K 0.5%: TCR 100x10 ⁻⁶ /K	350°C ± 10°C, 3 seconds ± 0.5 seconds or 260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	2%: TCR 200x10 ⁻⁶ /K 0.5%: TCR 100x10 ⁻⁶ /K	-55°C (30 minutes)/ +125°C (30 minutes), 5 cycles
Moisture Resistance	5%: TCR 200x10 ⁻⁶ /K 2%: TCR 100x10 ⁻⁶ /K	40°C, 90% - 95%RH, 1000h
Endurance @ 25°C	3%: TCR 200x10 ⁻⁶ /K 2%: TCR 100x10 ⁻⁶ /K	25°C, 1000 hours 1.5 hr ON/0.5 hr OFF cycle
Voltage Coefficient	±50x10 ⁻⁶ /V: TCR 200x10 ⁻⁶ /K ±10x10 ⁻⁶ /V: TCR 100x10 ⁻⁶ /K	GS1/4, 1/2 only, Rated voltage or max. working voltage, whichever is lower and 1/10 of its voltage
Voltage Characteristics	5%: TCR 200x10 ⁻⁶ /K 3%: TCR 100x10 ⁻⁶ /K	GS1 - 12, Rated voltage or max. working voltage, whichever is lower and 1/10 of its voltage
Resistance to Solvent	No evidence of damage to protective coating and marking	Soaking in IPA for 1 minute and brushing 10 times -3 cycles - liquid temperature 25°C ±5°C
Impulse Withstand Voltage	No abnormality in appearance and flash-over	An impulse voltage shall be applied 5 times at an interval of 1 minute

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

4/15/15

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Metal Film Resistors - Through Hole](#) category:

Click to view products by [KOA Speer](#) manufacturer:

Other Similar products are found below :

[MF2S-6K8JI](#) [MLF12DTE7K50](#) [GP55S-1002-FTW](#) [GP55S-1004-FTW](#) [GP55S-4753-FTW](#) [QW210](#) [RCFH-0.5-5TA](#) [RCFH-100-5TA](#) [RCFH-10-5TA](#) [RCFH-110-5TA](#) [RCFH-11K-5TA](#) [RCFH-11M-5TA](#) [RCFH-12K-5TA](#) [RCFH-130K-5TA](#) [RCFH-13-5TA](#) [RCFH-13K-5TA](#) [RCFH-13M-5TA](#) [RCFH-150K-5TA](#) [RCFH-15-5TA](#) [RCFH-160-5TA](#) [RCFH-160K-5TA](#) [RCFH-16-5TA](#) [RCFH-180K-5TA](#) [RCFH-18K-5TA](#) [RCFH-1M-5TA](#) [RCFH-200-5TA](#) [RCFH-200K-5TA](#) [RCFH-20K-5TA](#) [RCFH-220-5TA](#) [RCFH-220K-5TA](#) [RCFH-22K-5TA](#) [RCFH-2.2M-5TA](#) [RCFH-240K-5TA](#) [RCFH-24K-5TA](#) [RCFH-2-5TA](#) [RCFH-27-5TA](#) [RCFH-27K-5TA](#) [RCFH-2M-5TA](#) [RCFH-330-5TA](#) [RCFH-33-5TA](#) [RCFH-3.3M-5TA](#) [RCFH-360-5TA](#) [RCFH-360K-5TA](#) [RCFH-3.6M-5TA](#) [RCFH-39-5TA](#) [RCFH-39K-5TA](#) [RCFH-3.9M-5TA](#) [RCFH-430-5TA](#) [RCFH-47K-5TA](#) [RCFH-510K-5TA](#)