
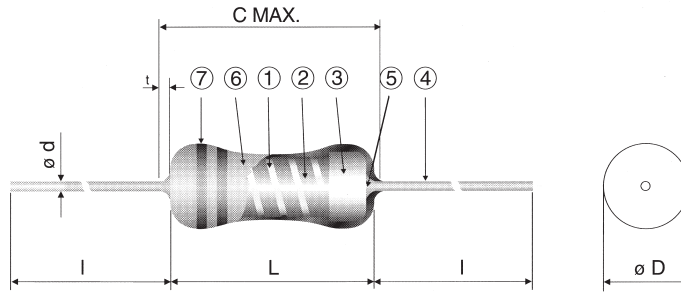


METAL OXIDE SMALL TYPE MOS • MOSX



STRUCTURE

- 1 Ceramic core
- 2 MOS = trimmed metal oxide
MOSX = trimmed metal film
- 3 Steel cap (Cu, Sn plated)
- 4 Lead wire
- 5 Welding joint
- 6 Flame retardant insulation coating
- 7 Marking

IDENTIFICATION

PRODUCT CODE	COATING COLOR	MARKING
MOS (X) 1/2 MOS (X) 1	Lavender	Color Code (R-value and tolerance)
MOS 2... 5 MOSX 2... 5		Alpha/Numeric (R-value and tolerance)

All these products have Pb-free terminations and meet EU-RoHS and China-RoHS requirements

TYPE DESIGNATION (HOW TO ORDER)

MOS	1/2	C	T52	A	2210	F	Contact us when you have control request for environmental hazardous material other than the substance specified by EU-RoHS
PRODUCT CODE MOS MOSX	POWER RATING Unit: Watt 1/2... 5	TERMINATION SURFACE MATERIAL C: SnCu	TAPING & FORMING	PACKAGING A: Ammo R: Reel	NOMINAL RESISTANCE F: 4 digits G, J: 3 digits	RESISTANCE TOLERANCE F: (±1%) G: (±2%) J: (±5%)	

*Please see "PACKAGING"

FEATURES


- Small size power type resistors
- Flame retardant coating (Equivalent to UL94 V-0)
- Automatic insertion is applicable
- Various formings are available
- High reliability for performance
- MOS = metal oxide film
- MOSX = metal film
- Meets or exceeds IEC 60 115-4, JIS C 5201-4, EIAJ RC-2138
- Rated ambient temperature: +70°C
- Operating temperature range: -55°C ... +200°C

DIMENSIONS (mm)

TYPE	L	C Max.	ø D	ø d (nom.)	l*
MOS (X) 1/2	6.2 ± 0.5	7.1	2.5 ± 0.5	0.60	24 Min.
MOS (X) 1	9.0 ± 1.0	11.1	3.0 ± 0.5		
MOS (X) 2	12.0 ± 1.0	15.0	4.0 ± 0.5	0.80	30 ± 3
MOS (X) 3	15.5 ± 1.0	18.0	6.0 ± 1.0		
MOS (X) 5	24.5 ± 1.0	28.0	9.0 ± 1.0		

*Lead length changes depending on taping and forming type.

DERATING CURVE

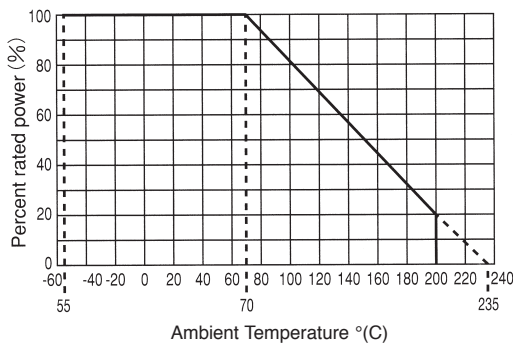

RATING

DIN SIZE	TYPE	T.C.R. (ppm/K)	POWER RATING*	MAX. WORKING VOLTAGE	MAX. OVERLOAD VOLTAGE	DIELECTRIC WITHSTANDING VOLTAGE	RESISTANCE RANGE		
							E24 & E96		E24
							F (±1%)	G (±2%)	
0207	MOS 1/2	± 300	0.5 W	300 V	600 V	400 V	10Ω ... 47kΩ	10Ω ... 47kΩ	10Ω ... 47kΩ
0411	MOS 1		1 W	350 V	700 V	700 V	10Ω ... 68kΩ	10Ω ... 68kΩ	10Ω ... 100kΩ
0414	MOS 2		2 W				10Ω ... 100kΩ		
0617	MOS 3		3 W	500 V	1000 V	800 V	—**	10Ω ... 100kΩ	10Ω ... 100kΩ
0922	MOS 5		5 W						
0207	MOSX 1/2		0.5 W				400 V		
0411	MOSX 1		1 W	500 V					
0414	MOSX 2		2 W		700 V				
0617	MOSX 3		3 W	—**					
0922	MOSX 5		5 W	800 V					

* For resistors operated at an ambient temperature of +70°C or above, the power rating shall be derated in accordance with the above derating curve.

** Resistors with tolerance ± 1% on request.

Rated voltage = √ Power rating x resistance value or max. working voltage, whichever is lower.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - Leaded](#) category:

Click to view products by [KOA Speer](#) manufacturer:

Other Similar products are found below :

[010-007220-002REV A](#) [M39014/01-1210V](#) [M39014/01-1281V](#) [M39014/01-1335V](#) [M39014/01-1571V](#) [M39014/01-1578V](#) [M39014/01-1593](#)
[M39014/02-1265V](#) [M39014/02-1347](#) [M39014/02-1350](#) [M39014/02-1356VTR1](#) [M39014/22-0167](#) [M39014/22-0734](#) [87043-49](#) [Q52-DK](#)
[AR215F103K4RTR2-3323](#) [C0603C309C5GACTU-CUT-TAPE](#) [C410C221K1G5TATR](#) [C420C102J1G5TATR](#) [C430C104M1U5TATR](#)
[SL155C222MAB](#) [FK26X7R2E104KN006](#) [CCR06CG183GRV](#) [CFB1/2C101J](#) [CFB1/2C102J](#) [CN20C102K](#) [M39014/01-1317](#) [M39014/01-](#)
[1572V](#) [M39014/01-1594V](#) [M39014/02-1236](#) [M39014/02-1321V](#) [M39014/02-1345V](#) [M39014/22-0351](#) [M39014/22-0695](#) [M39014/220767](#)
[M39014/220788](#) [M39014/22-1005](#) [MA405E334MAA](#) [MD015A103KAB](#) [SL301E105MAB](#) [CCR05CG242FRV](#) [KTD101B684M32A0B00](#)
[CCR07CG473KR](#) [CCR05CG820JP](#) [TKC-TMC1206-05-1501-J??](#) [TKC-TMC1206-05-1801-J](#) [TKC-TMC1206-05-20R0-F](#) [TKC-](#)
[TMC1206-05-3901-J](#) [TKC-TMC1206-05-44R2-F](#) [TKC-TMC1206-05-4703-J??](#)