


features


- Smooth current flow, suitable for large current detecting
- Flat structure, applicable for strong mounting
- Automatic mounting machines are applicable
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- AEC-Q200 Qualified

current sense

dimensions and construction

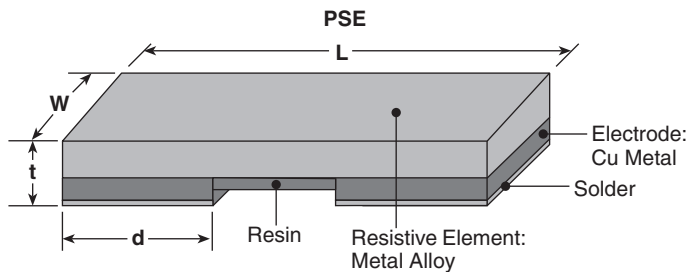

Type (Inch Size Code)	Resist. (Ω)	Dimensions inches (mm)			
		L	W	d	t
PSI (3920)	3.0m	.394 \pm .010	.205 \pm .010	.079 \pm .010	.028 \pm .010
	4.0m	(10.0 \pm 0.25)	(5.2 \pm 0.25)	(2.0 \pm 0.25)	(0.7 \pm 0.25)
PSE (2525)	0.5m	.252 \pm .010 (6.4 \pm 0.25)	.252 \pm .010 (6.4 \pm 0.25)	.087 \pm .010 (2.2 \pm 0.25)	.026 \pm .010
	1.0m				(0.65 \pm 0.25)
	1.5m, 2.0m				.019 \pm .010 (0.50 \pm 0.25)

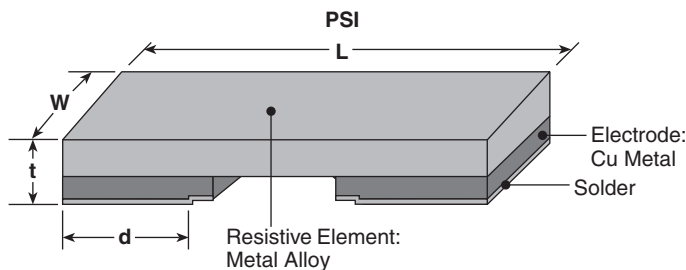

NOT RECOMMENDED FOR NEW DESIGN
RECOMMENDED REPLACEMENT PSJ2, TLR3AP

ordering information

PS	I	D	TEB	3L00	F
Type	Power Rating I: 3W E: 3W E: 5W	Termination Material D: SnAgCu	Packaging TE: embossed plastic (PSE: 2,000 pieces/reel) TEB: embossed plastic (PSI: 3,000 pieces/reel)	Nominal Resistance \pm 1%: 4 digits \pm 5%: 3 digits All values less than 0.1 Ω (100m Ω) are expressed in m Ω with "L" as decimal Ex: 1m Ω = 1L00	Tolerance F: \pm 1% J: \pm 5%



For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range		Rated Terminal Part Temperature	Operating Temperature Range
			F: ±1%	J: ±5%		
PSI	3W	±50	3mΩ, 4mΩ	—	+105°C	-65°C to +155°C
PSE	3W	±150	0.5mΩ, 1.0mΩ 1.5mΩ, 2.0mΩ	0.5mΩ, 1mΩ, 1.5mΩ, 2mΩ	+105°C	
	5W				0.5mΩ, 1mΩ: +105°C 1.5mΩ: 85°C 2mΩ: +70°C	

environmental applications

Derating Curve

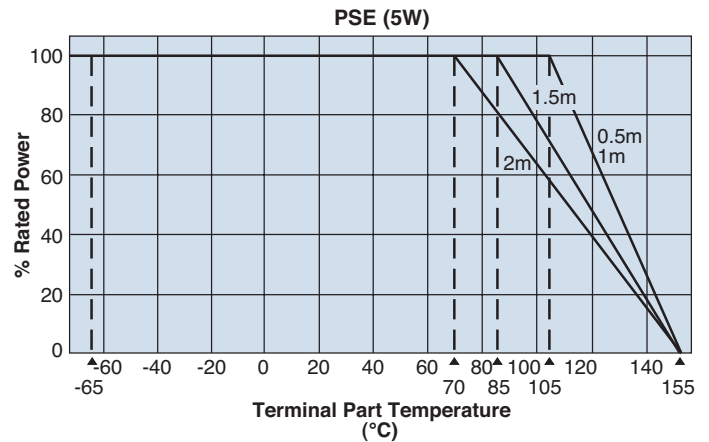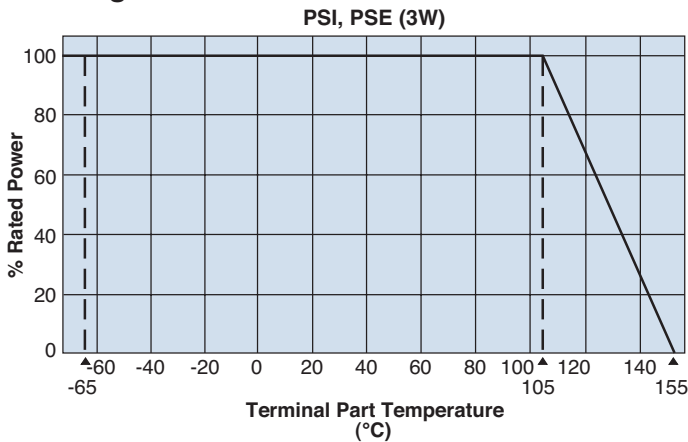

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve. Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

Performance Characteristics

Parameter	Requirement $\Delta R \pm\%$		Test Method
	Limit	Typical	
T.C.R.	Within specified T.C.R.	—	+25°C/+100°C
Overload (Short time)	±0.2%: PSI ±0.5%: PSE	±0.1%: PSI ±0.2%: PSE	15W for 5 seconds
Resistance to Solder Heat	±0.5%	±0.1%	260°C ± 5°C, 15 seconds ± 1 second
Rapid Change of Temperature	±0.5%	±0.2%	-55°C (30 minutes), +125°C (30 minutes), 1,000 cycles
Moisture Resistance	±0.5%	±0.2%	85°C ± 2°C, 85% RH, 1000 hours, 10% Bias
Endurance at and Less of Terminal Part Temperature	±1.0%	±0.2%: PSI ±0.6%: PSE	Terminal part temperature: 105°C (PSI, PSE (3W), PSE (5W) 0.5m, 1.0m) +85°C (PSE (5W) 1.5m) +70°C (PSE (5W) 2.0m), 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Low Temperature Exposure	±0.5%	±0.02%: PSI ±0.1%: PSE	-65°C, 96 hours
High Temperature Exposure	±1%	±0.4%: PSI ±0.6%: PSE	+155°C, 1,000 hours

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category](#):

Click to view products by [KOA Speer manufacturer](#):

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [65709-330JE](#) [PR2512FKF7W0R005L](#) [PF2512FKF7W0R006L](#) [PF2512FKF7W0R033L](#) [CD2015FC-0.10-1%](#)
[PR2512FKF7W0R004L](#) [RC1005F124CS](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RLP73N1ER43JTD](#) [LRC-](#)
[LR2512LF-01-R820J](#) [WR06X104JGLJ](#) [TL2BR01F](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#) [PF1206FRF7W0R02L](#) [RL7520WT-R002-F](#)
[RL7520WT-R047-F](#) [KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [Y14880R02000B9R](#) [RLP73M1ER051FTDF](#)
[RLP73M2AR051FTDF](#) [RLP73M2AR075FTDF](#) [RLP73K2A1R0FTDF](#) [RLP73M1JR051FTDF](#) [RLP73N1JR47FTDF](#) [SR731ERTTP5R10F](#)
[SR731ERTTP100J](#) [SR731ERTTP6R80F](#) [SR731ERTTP4R70F](#) [SR731ERTTP2R20F](#) [SR731ERTTP3R90F](#) [SR731ERTTP1R00F](#)
[SR731ERTTP10R0F](#) [SR731ERTTP2R00F](#) [SR731ERTTP8R20F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#) [SR731ERTTP2R0J](#)
[SR731ERTTP4R7J](#) [SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#) [SR731ERTTP9R10F](#)