



## flat chip resistors (anti-sulfuration)

### features

- Excellent anti-sulfuration characteristic due to using high sulfuration-proof inner top electrode material
- Excellent heat resistance and weather resistance are ensured by the use of metal glaze thick film
- High stability and high reliability with the triple-layer structure of electrode
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0201 (1H), 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (W2H), 2512 (W3A)

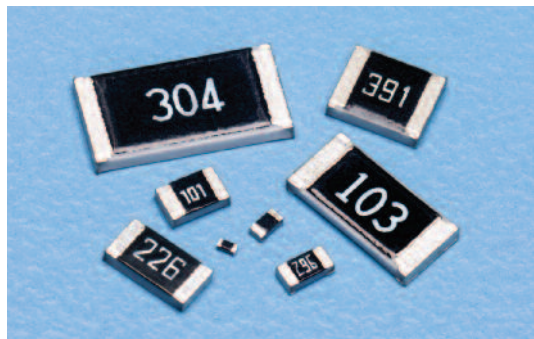

### dimensions and construction

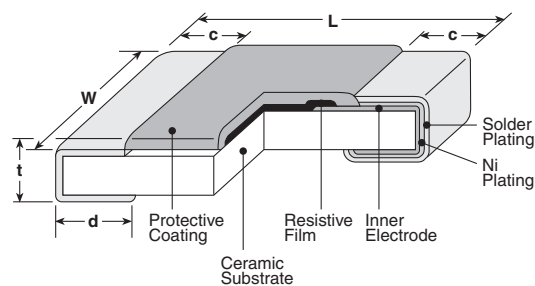

| Type<br>(Inch Size Code)        | Dimensions inches (mm)  |                         |                         |   |                          |
|---------------------------------|---|-------------------------|-------------------------|---|--------------------------|
|                                 | L   | W                       | c                       | d   | t                        |
| <b>1F</b><br>(01005)            | .016±.001<br>(0.4±0.02)   | .008±.001<br>(0.2±0.02) | .004±.001<br>(0.1±0.03) | .004±.001<br>(0.11±0.03)  | .005±.001<br>(0.13±0.02) |
| <b>1H</b><br>(0201)             | .024±.001<br>(0.6±0.03)   | .012±.001<br>(0.3±0.03) | .004±.002<br>(0.1±0.05) | .006±.002<br>(0.15±0.05)  | .009±.001<br>(0.23±0.03) |
| <b>1E</b><br>(0402)             | .039 <sup>+0.004</sup> <sub>-0.002</sub><br>(1.0 <sup>+0.1</sup> <sub>-0.05</sub> ) | .02±.002<br>(0.5±0.05)  | .008±.004<br>(0.2±0.1)  | .01 <sup>+0.002</sup> <sub>-0.004</sub><br>(0.25 <sup>+0.05</sup> <sub>-0.1</sub> ) | .014±.002<br>(0.35±0.05) |
| <b>1J</b><br>(0603)             | .063±.008<br>(1.6±0.2)  | .031±.004<br>(0.8±0.1)  | .012±.004<br>(0.3±0.1)  | .012±.004<br>(0.3±0.1)  | .018±.004<br>(0.45±0.1)  |
| <b>2A</b><br>(0805)             | .079±.008<br>(2.0±0.2)  | .049±.004<br>(1.25±0.1) | .016±.008<br>(0.4±0.2)  | .012 <sup>+0.008</sup> <sub>-0.004</sub><br>(0.3 <sup>+0.2</sup> <sub>-0.1</sub> )  | .02±.004<br>(0.5±0.1)    |
| <b>2B</b><br>(1206)             | .126±.008<br>(3.2±0.2)  | .063±.008<br>(1.6±0.2)  |                         | .016 <sup>+0.008</sup> <sub>-0.004</sub><br>(0.4 <sup>+0.2</sup> <sub>-0.1</sub> )  |                          |
| <b>2E</b><br>(1210)             |   | .102±.008<br>(2.6±0.2)  |                         |   |                          |
| <b>W2H</b><br>(2010)            | .197±.008<br>(5.0±0.2)  | .098±.008<br>(2.5±0.2)  | .02±.012<br>(0.5±0.3)   | .023±.006<br>(0.65±0.15)  | .024±.004<br>(0.6±0.1)   |
| <b>W3A/<br/>W3A2*</b><br>(2512) | .248±.008<br>(6.3±0.2)  | .122±.008<br>(3.1±0.2)  |                         |   |                          |

\* RK73Z exempt

### ordering information

| RK73H                   | 2A   | RT                    | TD  | 1002   | F                                      |
|-------------------------|--|-----------------------|---|--|--|
| Type                    | Power Rating   | Termination Material  | Packaging   | Nominal Resistance   | Resistance Tolerance                   |
| RK73B<br>RK73H<br>RK73Z | 1F<br>1H<br>1E<br>1J<br>2A<br>2B<br>2E<br>W2H<br>W3A<br>W3A2 | RT: Sn<br>Anti-Sulfur | TX: 01005 only: 4mm width - 1mm pitch plastic embossed<br>TBL: 01005 only: 2mm pitch pressed paper<br>TC: 0201 only: 7" 2mm pitch pressed paper<br>(TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel)<br>TPL: 0402 only: 2mm pitch punch paper<br>TP: 0402, 0603, 0805: 7" 2mm pitch punch paper<br>TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper<br>TE: 0805, 1206, 1210, 2010 & 2512: 7" embossed plastic<br>For further information on packaging, please refer to Appendix A | RK73B:<br>3 digits<br>RK73H:<br>4 digits<br>RK73Z:<br>None | D: ±0.5%<br>F: ±1%<br>G: ±2%<br>J: ±5% |

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

11/06/19

### applications and ratings

#### RK73B/RK73H

| Part Designation | Power Rating | Rated Ambient Temp. | Rated Terminal Part Temp. | T.C.R. (ppm/°C) Max. | Resistance Range          |                |              |              | Maximum Working Voltage | Maximum Overload Voltage | Operating Temp. Range |
|------------------|--------------|---------------------|---------------------------|----------------------|---------------------------|----------------|--------------|--------------|-------------------------|--------------------------|-----------------------|
|                  |              |                     |                           |                      | RK73H                     |                | RK73B        |              |                         |                          |                       |
|                  |              |                     |                           |                      | D±0.5% E24, E96           | F±1% E24, E96* | G±2% E24     | J±5% E24     |                         |                          |                       |
| 1F               | 0.03W        | 70°C                | —                         | ±200                 | —                         | 100kΩ - 2MΩ*   | 100kΩ - 1MΩ  | 100kΩ - 10MΩ | 20V                     | 30V                      | -55°C to +125°C       |
|                  |              |                     |                           | ±250                 |                           | 10Ω - 91kΩ*    | 10Ω - 91kΩ   | 10Ω - 91kΩ   |                         |                          |                       |
|                  |              |                     |                           | 0 - +300             |                           | —              | 1Ω - 9.1Ω    | 1Ω - 9.1Ω    |                         |                          |                       |
| 1H               | 0.05W        |                     | ±200                      | 100Ω - 100kΩ         | 100Ω - 1MΩ                | —              | 100 - 1M     | 25V          | 50V                     |                          |                       |
| 1E               | 0.1W         |                     |                           | —                    | 10Ω - 97.6Ω               |                | 10Ω - 91Ω    |              |                         |                          |                       |
|                  |              |                     | ±100                      | 100Ω - 1MΩ           | 10Ω - 1MΩ                 | —              | —            | 75V          | 100V                    |                          |                       |
| 1J               | 0.1W         |                     | ±200                      | —                    | 1.02MΩ - 10MΩ             | 10Ω - 10MΩ     | 1Ω - 10MΩ    |              |                         |                          |                       |
|                  |              |                     | ±100                      | 1.02kΩ - 1MΩ         | 1.02kΩ - 1MΩ              | —              | —            |              |                         |                          |                       |
|                  |              |                     | ±200                      | —                    | 1.02MΩ - 10MΩ             | 1.1kΩ - 10MΩ   | 1.1kΩ - 10MΩ |              |                         |                          |                       |
| 2A               | 0.25W        |                     | ±200                      | 100Ω - 1kΩ           | 10Ω - 1kΩ                 | —              | —            | 150V         | 200V                    |                          |                       |
|                  |              |                     |                           | ±100                 | 100Ω - 1MΩ                | 10Ω - 1MΩ      | 10Ω - 10MΩ   |              |                         | 1Ω - 10MΩ                |                       |
| 2B               | 0.25W        |                     | ±100                      | —                    | —                         | 10Ω - 1kΩ      | 1Ω - 1kΩ     | 200V         | 400V                    |                          |                       |
|                  |              | ±200                |                           | —                    | —                         | 10Ω - 1MΩ      | 1Ω - 1MΩ     |              |                         |                          |                       |
| 2E               | 0.5W         | ±100                | 100Ω - 1MΩ                | 10Ω - 1MΩ            | —                         | —              | 200V         | 400V         |                         |                          |                       |
|                  |              |                     | ±200                      | —                    | —                         | 10Ω - 1MΩ      |              |              | 1Ω - 1MΩ                |                          |                       |
| W2H              | 0.75W        | ±100                | 10Ω - 1MΩ                 | 10Ω - 1MΩ            | —                         | —              | 200V         | 400V         |                         |                          |                       |
|                  |              |                     | ±200                      | —                    | 1 - 9.76<br>1.02MΩ - 10MΩ | 1Ω - 10MΩ      |              |              | 1Ω - 10MΩ               |                          |                       |
| W3A              | 1W           | ±100                | 10Ω - 1MΩ                 | 10Ω - 1MΩ            | —                         | —              | 200V         | 400V         |                         |                          |                       |
|                  |              |                     | ±200                      | —                    | 1.02MΩ - 10MΩ             | 10Ω - 10MΩ     |              |              | 1Ω - 10MΩ               |                          |                       |
| W3A2             | 2W           | ±100                | 10Ω - 1MΩ                 | 10Ω - 1MΩ            | —                         | —              | 200V         | 400V         |                         |                          |                       |
|                  |              |                     | ±200                      | —                    | 1.02MΩ - 10MΩ             | 10Ω - 10MΩ     |              |              | 1Ω - 10MΩ               |                          |                       |
|                  |              |                     | 95°C                      |                      |                           |                |              |              |                         |                          | -55°C to +155°C       |


Rated voltage =  $\sqrt{\text{Power rating} \times \text{resistance value}}$  or max. working voltage, whichever is lower

\*The nominal resistance value for RK73H1F (F:±1%) is E24


If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves in the terminal part temperature" in the beginning of the catalog.

While using under high power, the temperature of the product may increase depending on the condition of heat dissipation from PCB. Be sure to check the terminal part temperature as well as precautions to use on delivery specification before use.

### Derating Curve

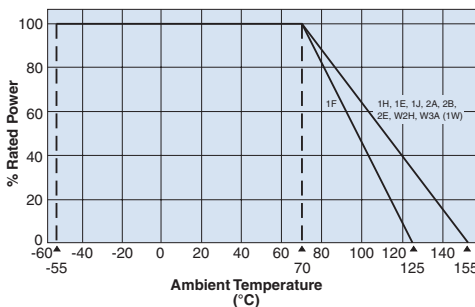

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

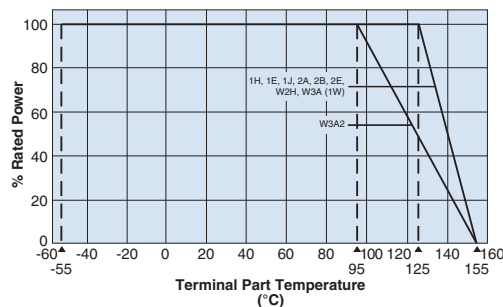

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the above derating curve.

Please refer to "Introduction of the derating curve based on the terminal part temperature" in the beginning of our catalog before use.

### applications and ratings (continued)

#### RK73Z

| Part Designation | Rated Ambient Temperature | Rated Terminal Part Temperature | Resistance | Current Rating | Maximum Surge Current | Operating Temperature Range |
|------------------|---------------------------|---------------------------------|------------|----------------|-----------------------|-----------------------------|
| 1H               | +70°C                     | +125°C                          | 100mΩ max. | 0.5A           | 1A                    | -55°C to +155°C             |
| 1E               |                           |                                 | 50mΩ max.  | 1A             | 2A                    |                             |
| 1J               |                           |                                 |            | 2A             | 5A                    |                             |
| 2A               |                           |                                 | 10A        |                |                       |                             |
| 2B               |                           |                                 |            |                |                       |                             |
| 2E               |                           |                                 |            |                |                       |                             |
| W2H              |                           |                                 |            |                |                       |                             |
| W3A              |                           |                                 |            |                |                       |                             |

### environmental applications

#### Performance Characteristics

| Parameter                   | RK73H, RK73B Requirement $\Delta R$ $\pm(\%+0.1\Omega)$                 |   | RK73Z Requirement                                |   | Test Method  |
|-----------------------------|---|---|--|---|--|
|                             | Limit   | Typical   | Limit  | Typical   |  |
| Resistance                  | Within specified tolerance  | —   | R $\leq$ 100mΩ: 1H<br>R $\leq$ 50mΩ: All others  | R $\leq$ 90mΩ: 1H<br>R $\leq$ 40mΩ: All others  | 25°C   |
| T.C.R.                      | Within specified T.C.R.   | —   | —  | —   | +25°C/-55°C and +25°C/+125°C   |
| Overload (Short time)       | $\pm 2\%$   | $\pm 1\%$ : 1F<br>$\pm 0.8\%$ : All others                              | R $\leq$ 100mΩ: 1H<br>R $\leq$ 50mΩ: All others  | R $\leq$ 90mΩ: 1H<br>R $\leq$ 40mΩ: All others  | RK73B, RK73H Rated Voltage x 2.5 for 5 seconds (1E, 2B, W3A2: Rated Voltage x 2 for 5 seconds)<br>RK73Z: Max. overload current for 5 seconds |
| Resistance to Solder Heat   | $\pm 1\%$ : 10Ω $\leq$ R $\leq$ 1MΩ<br>$\pm 3\%$ : R $<$ 10Ω, R $>$ 1MΩ | $\pm 1\%$ : R $<$ 10Ω, R $>$ 1MΩ<br>$\pm 0.5\%$ : All others            | R $\leq$ 100mΩ: 1H<br>R $\leq$ 50mΩ: All others  | R $\leq$ 90mΩ: 1H<br>R $\leq$ 40mΩ: All others  | 260°C $\pm$ 5°C, 10 seconds $\pm$ 1 second   |
| Rapid Change of Temperature | $\pm 1\%$ : 1F<br>$\pm 0.5\%$ : All others                              | $\pm 0.5\%$ : 1F<br>$\pm 0.3\%$ : All others                            | R $\leq$ 100mΩ: 1H<br>R $\leq$ 50mΩ: All others  | R $\leq$ 90mΩ: 1H<br>R $\leq$ 40mΩ: All others  | -55°C (30 minutes), +125°C (30 minutes), 100 cycles  |
| Moisture Resistance         | $\pm 2\%$ : 1J, 2A, 2B<br>$\pm 3\%$ : All others                        | $\pm 0.75\%$ : 1J, 2A, 2B<br>$\pm 1.5\%$ : 1F<br>$\pm 1\%$ : All others | R $\leq$ 150mΩ: 1H<br>R $\leq$ 100mΩ: All others | R $\leq$ 100mΩ: 1H<br>R $\leq$ 50mΩ: All others | 40°C $\pm$ 2°C, 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle  |
| Endurance at 70°C           | $\pm 2\%$ : 1J, 2A, 2B<br>$\pm 3\%$ : All others                        | $\pm 0.75\%$ : 1J, 2A, 2B<br>$\pm 1\%$ : All others                     | R $\leq$ 150mΩ: 1H<br>R $\leq$ 100mΩ: All others | R $\leq$ 100mΩ: 1H<br>R $\leq$ 50mΩ: All others | 70°C $\pm$ 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle  |
| High Temperature Exposure   | $\pm 1\%$   | $\pm 0.5\%$   | R $\leq$ 150mΩ: 1H<br>R $\leq$ 100mΩ: All others | R $\leq$ 100mΩ: 1H<br>R $\leq$ 50mΩ: All others | +125°C, 1000 hours: 1F; +155°C, 1000 hours: 1H, 1E, 1J, 2A, 2B, 2E, W2H, W3A   |
| Sulfuration Test            | $\pm 5\%$   | $\pm 0.3\%$ : 1F, 1H<br>$\pm 0.2\%$ : All others                        | R $\leq$ 150mΩ: 1H<br>R $\leq$ 100mΩ: All others | R $\leq$ 100mΩ: 1H<br>R $\leq$ 50mΩ: All others | Soaked in industrial oil with 3.5% sulfur concentration 105°C $\pm$ 3°C, 500 hours   |

Please refer to conventional products for characteristic data such as temperature rise.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thick Film Resistors - SMD category](#):*

*Click to view products by [KOA Speer manufacturer](#):*

Other Similar products are found below :

[CR-05FL7--19K6](#) [CR-05FL7--243R](#) [CR-05FL7--40K2](#) [CR-12JP4--680R](#) [CRCW04021K20FKEE](#) [CRCW06036K80FKEE](#)  
[M55342K06B309DRS3](#) [M55342K06B6E81RS3](#) [M55342K08B100DRWB](#) [M55342M05B200DRWB](#) [M55342M06B26E7RS3](#) [MC0603-511-](#)  
[JTW](#) [742C083750JTR](#) [MCR01MZPF1202](#) [MCR01MZPF1601](#) [MCR01MZPF1800](#) [MCR01MZPF6201](#) [MCR01MZPF9102](#) [MCR01MZPJ113](#)  
[MCR01MZPJ121](#) [MCR01MZPJ125](#) [MCR01MZPJ203](#) [MCR01MZPJ751](#) [MCR01MZPJ822](#) [MCR03EZHJ103](#) [MCR03EZPFX1272](#)  
[MCR03EZPJ123](#) [MCR03EZPJ270](#) [MCR03EZPJ821](#) [MCR10EZPF1102](#) [MCR10EZPF2003](#) [MCR10EZPF2700](#) [MCR18EZPJ330](#)  
[RC0603F1473CS](#) [RC0603F150CS](#) [RC1005F1152CS](#) [RC1005F1182CS](#) [RC1005F1372CS](#) [RC1005F183CS](#) [RC1005F1911CS](#)  
[RC1005F1912CS](#) [RC1005F203CS](#) [RC1005F2052CS](#) [RC1005F2431CS](#) [RC1005F3011CS](#) [RC1005F303CS](#) [RC1005F4321CS](#)  
[RC1005F4642CS](#) [RC1005F471CS](#) [RC1005F4751CS](#)