


**10-ohm 0.5%, 1%, 2%, 5% tolerance thick film current sense resistor**




**features**

- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.
- AEC-Q200 Qualified: 0402 (1E), 0603 (1J), 0805 (2A), 1206 (2B), 1210 (2E), 2010 (2H/W2H), 2512 (3A/W3A)

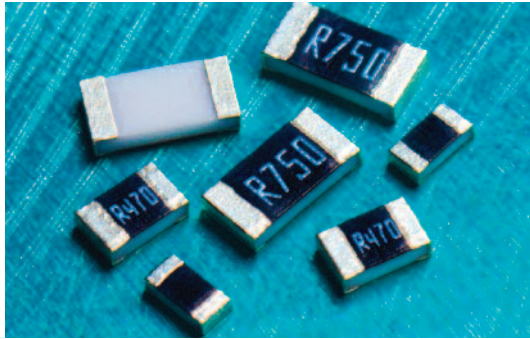

current sense

**dimensions and construction**

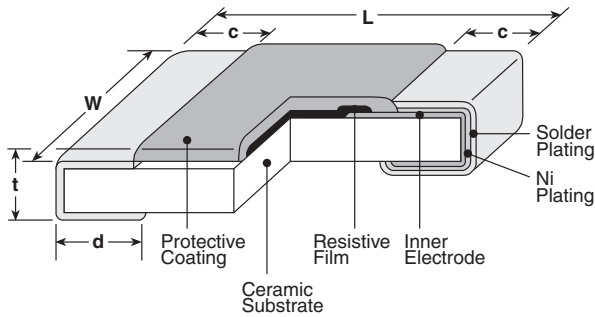

| Type<br>(Inch Size Code) | Dimensions inches (mm)   |  |                         |   |                          |
|--------------------------|--|--|-------------------------|---|--------------------------|
|                          | L  | W  | c                       | d   | t                        |
| 1H (0201)                | .024±.001<br>(0.6±0.03)  | .012±.001<br>(0.3±0.03)  | .004±.002<br>(0.1±0.05) | .006±.002<br>(0.15±0.05)  | .009±.001<br>(0.23±0.03) |
| 1E (0402)                | .039 <sup>+0.004</sup> <sub>-.002</sub><br>(1.0 <sup>+0.1</sup> <sub>-0.05</sub> ) | .02 <sup>+0.004</sup> <sub>-.002</sub><br>(0.5 <sup>+0.1</sup> <sub>-0.05</sub> )  | .01±.004<br>(0.25±0.1)  | .01±.004<br>(0.25±0.1)  | .014±.002<br>(0.35±0.05) |
| 1J (0603)                | .063±.008<br>(1.6±0.2)   | .031 <sup>+0.006</sup> <sub>-.004</sub><br>(0.8 <sup>+0.15</sup> <sub>-0.1</sub> ) | .014±.004<br>(0.35±0.1) | .014±.004<br>(0.35±0.1)   | .018±.004<br>(0.45±0.1)  |
| 2A (0805)                | .079±.008<br>(2.0±0.2)   | .049±.004<br>(1.25±0.1)  | .016±.008<br>(0.4±0.2)  | .012 <sup>+0.008</sup> <sub>-.004</sub><br>(0.3 <sup>+0.2</sup> <sub>-0.1</sub> ) | .02±.004<br>(0.5±0.1)    |
| 2B (1206)                | .126±.008<br>(3.2±0.2)   | .063±.008<br>(1.6±0.2)   | .02±.012<br>(0.5±0.3)   | .016 <sup>+0.008</sup> <sub>-.004</sub><br>(0.4 <sup>+0.2</sup> <sub>-0.1</sub> ) | .024±.004<br>(0.6±0.1)   |
| 2E (1210)                |  | .102±.008<br>(2.6±0.2)   |                         |   |                          |
| 2H (2010)                |  | .098±.008<br>(2.5±0.2)   |                         |   |                          |
| W2H (2010)               | .197±.008<br>(5.0±0.2)   |  |                         |   |                          |
| 3A (2512)                | .248±.008<br>(6.3±0.2)   | .122±.008<br>(3.1±0.2)   |                         | .016 <sup>+0.008</sup> <sub>-.004</sub><br>(0.4 <sup>+0.2</sup> <sub>-0.1</sub> ) |                          |
| W3A (2512)               |  |  |                         | .026±.006<br>(0.65±0.15)  |                          |

**ordering information**

| SR73   | 2B   | T   | TD   | 1R00   | F                                      |
|--|--|---|--|--|--|
| Type   | Size   | Termination Material  | Packaging  | Nominal Resistance   | Tolerance                              |
| 1H<br>1E<br>1J<br>2A<br>2B<br>2E<br>W2H<br>W3A<br>2H<br>3A | 1H<br>1E<br>1J<br>2A<br>2B<br>2E<br>W2H<br>W3A<br>2H<br>3A | T: Sn<br>L: SnPb (1E, 1J, 2A, 2B, 2E, 2H, 3A)<br>G: Au (1J, 2A, 2B: 0.1Ω - 10Ω - contact factory) | TC: 0201 only: 7" 2mm pitch pressed paper (TC: 10,000 pcs/reel, TCM: 15,000 pcs/reel)<br>TPL: 0402 only: 2mm pitch punch paper<br>TP: 0402, 0603, 0805: 7" 2mm pitch punch paper<br>TD: 0603, 0805, 1206, 1210: 7" 4mm pitch punched paper<br>TE: 0805, 1206, 1210, 2010 & 2512: 7" embossed plastic<br>For further information on packaging, please refer to Appendix A | ±2%, ±5%: 2 significant figures + 1 multiplier "R" indicates decimal on value <10Ω<br>±1%: 3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω<br>All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal<br>Example: 20mΩ = 20L (3-digit) | D: ±0.5%<br>F: ±1%<br>G: ±2%<br>J: ±5% |

**applications and ratings**

| Part Designation* | Power Rating @ 70°C           | Rated Ambient Temp. | Rated Terminal Part Temp. | T.C.R. (ppm/°C) Max. | Resistance Range    |   |   |   |
|-------------------|-------------------------------|---------------------|---------------------------|----------------------|---------------------|---|---|---|
|                   |                               |                     |                           |                      | E-24, E-96 (D±0.5%) | E-24, E-96 (F±1%)**                               | E-24 (G±2%)                                 | E-24 (J±5%)                                 |
| SR731H (0201)     | 0.1W                          | 70°C                | —                         | 0 ~ +400<br>0 ~ +500 | —                   | 1Ω - 10Ω**  | —   | 0.27Ω - 10Ω<br>0.18Ω - 0.24Ω                |
| SR731E (0402)     | 1/6W (.166W)                  | 70°C                | 125°C                     | ±200<br>±300<br>±500 | —<br>—<br>—         | 0.51Ω - 10Ω**<br>0.2Ω - 0.47Ω**<br>0.1Ω - 0.18Ω** | 0.51Ω - 10Ω<br>0.2Ω - 0.47Ω<br>0.1Ω - 0.18Ω | 0.51Ω - 10Ω<br>0.2Ω - 0.47Ω<br>0.1Ω - 0.18Ω |
| SR731J (0603)     | 1/5W (.2W)<br>New 1/4W (.25W) | 70°C<br>70°C        | 125°C<br>125°C            | ±200                 | —                   | 1.02Ω - 10Ω<br>0.1Ω - 1Ω                          | 1.1Ω - 10Ω<br>0.1Ω - 1Ω                     | 1.1Ω - 10Ω<br>0.1Ω - 1Ω                     |

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/01/19

**10-ohm 0.5%, 1%, 2%, 5% tolerance thick film current sense resistor**

**applications and ratings (continued)**


current sense

| Part Designation* | Power Rating @ 70°C      | Rated Ambient Temp. | Rated Terminal Part Temp. | T.C.R. (ppm/°C) Max. | Resistance Range    |                     |             |                 |
|-------------------|--------------------------|---------------------|---------------------------|----------------------|---------------------|---------------------|-------------|-----------------|
|                   |                          |                     |                           |                      | E-24, E-96 (D±0.5%) | E-24, E-96 (F±1%)** | E-24 (G±2%) | E-24 (J±5%)     |
| SR732A (0805)     | 1/3W (.33W)              | 70°C                | 125°C                     | ±100                 | 0.15Ω - 10Ω         | 0.1Ω - 10Ω          | —           | —               |
|                   |                          |                     |                           | ±200                 | —                   | —                   | 0.1Ω - 10Ω  | 0.1Ω - 10Ω      |
|                   |                          |                     |                           | ±500                 | —                   | —                   | —           | 0.051Ω - 0.091Ω |
|                   | 1/2W (.5W) <sup>1</sup>  | —                   | 105°C                     | ±100                 | 0.15Ω - 10Ω         | 0.1Ω - 10Ω          | —           | —               |
|                   |                          |                     |                           | ±200                 | —                   | —                   | 0.1Ω - 10Ω  | 0.1Ω - 10Ω      |
|                   |                          |                     |                           | ±500                 | —                   | —                   | —           | 0.051Ω - 0.091Ω |
| SR732B (1206)     | 1/3W (.33W)              | 70°C                | 125°C                     | ±100                 | 0.15Ω - 10Ω         | 0.1Ω - 10Ω          | —           | —               |
|                   |                          |                     |                           | ±200                 | —                   | —                   | 0.1Ω - 10Ω  | 0.1Ω - 10Ω      |
|                   |                          |                     |                           | ±500                 | —                   | —                   | —           | 0.056Ω - 0.091Ω |
|                   | 1/2W (.5W) <sup>1</sup>  | —                   | 110°C                     | ±100                 | 0.15Ω - 10Ω         | 0.1Ω - 10Ω          | —           | —               |
|                   |                          |                     |                           | ±200                 | —                   | —                   | 0.1Ω - 10Ω  | 0.1Ω - 10Ω      |
|                   |                          |                     |                           | ±500                 | —                   | —                   | —           | 0.056Ω - 0.091Ω |
| SR732E (1210)     | 1/2W (.5W)               | 70°C                | 125°C                     | ±100                 | —                   | 0.1Ω - 10Ω          | —           | —               |
|                   |                          |                     |                           | ±200                 | —                   | —                   | 0.1Ω - 10Ω  | 0.047Ω - 10Ω    |
|                   |                          |                     |                           | ±500                 | —                   | —                   | —           | 0.036Ω - 0.043Ω |
|                   | 2/3W (.66W) <sup>1</sup> | —                   | 110°C                     | ±1000                | —                   | —                   | —           | 0.024Ω - 0.033Ω |
|                   |                          |                     |                           | ±100                 | —                   | 0.1Ω - 10Ω          | —           | —               |
|                   |                          |                     |                           | ±200                 | —                   | —                   | 0.1Ω - 10Ω  | 0.047Ω - 10Ω    |
| SR732H/W2H (2010) | 3/4W (.75W)              | 70°C                | 125°C                     | ±100                 | —                   | 0.1Ω - 10Ω          | —           | —               |
|                   |                          |                     |                           | ±200                 | —                   | —                   | 0.1Ω - 10Ω  | 0.1Ω - 10Ω      |
|                   |                          |                     |                           | ±500                 | —                   | —                   | —           | 0.056Ω - 0.091Ω |
|                   |                          |                     |                           | ±800                 | —                   | —                   | —           | 0.033Ω - 0.051Ω |
| SR733A/W3A (2512) | 1W                       | 70°C                | 125°C                     | ±100                 | —                   | 0.1Ω - 10Ω          | —           | —               |
|                   |                          |                     |                           | ±200                 | —                   | —                   | 0.1Ω - 10Ω  | 0.1Ω - 10Ω      |
|                   |                          |                     |                           | ±500                 | —                   | —                   | —           | 0.056Ω - 0.091Ω |
|                   |                          |                     |                           | ±800                 | —                   | —                   | —           | 0.039Ω - 0.051Ω |


\* Parentheses indicate EIA package size codes. \*\* 1H, 1E (F: ±1%) E-24 values only. Operating Temp: -55°C to +125°C (SR731H only), -55°C to +150°C  
 If any questions should arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature," please give priority to the "Rated Terminal Part Temperature." Prior to use and for more details refer to "Introduction of the derating curves on the terminal part temperature" in the beginning of the catalog.  
<sup>1</sup> Prior to use, refer to the "Higher Power Ratings" in the beginning of catalog. Rated voltage = √(Power rating x resistance value or max. working voltage, whichever is lower

**environmental applications**

**Derating Curve**

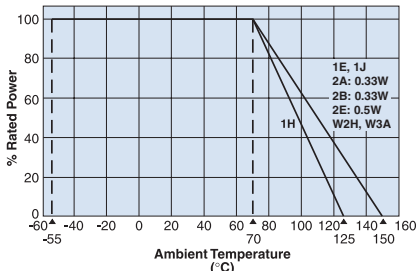


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the derating curve.

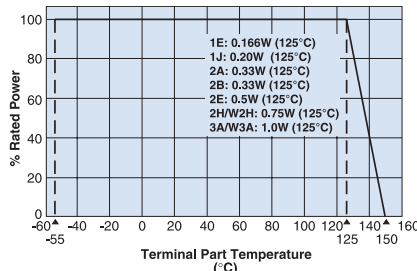

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with the derating curve.


Please refer to "Introduction of the derating curve based on the terminal part temperature" on the beginning of our catalog before use.

SR73 2A (0.5W), SR73 2B (0.5W), SR73 2E (0.66W)

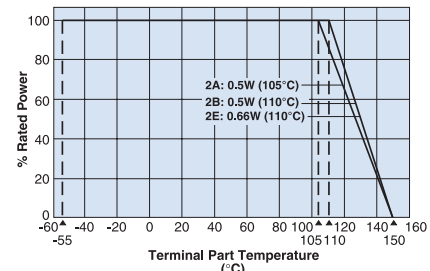


**Temperature Rise**


SR73 1E-1J

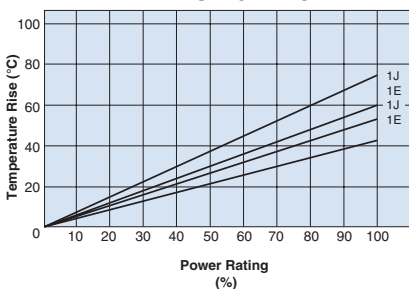


SR73 2A-2E

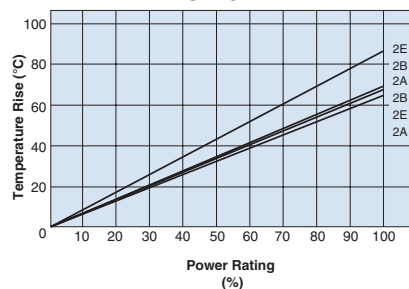

SR73 W2H

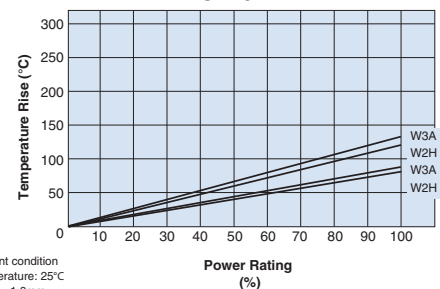

Measurement condition  
 Room temperature: 25°C  
 PCB: FR-4t = 1.6mm  
 Cu foil thickness: 35µm




Regarding the temperature rise, the value of the temperature varies per conditions and board for use since the temperature is measured under our measuring conditions.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


12/11/19

### One-Pulse Limiting Electric Power

SR73 1H-2A

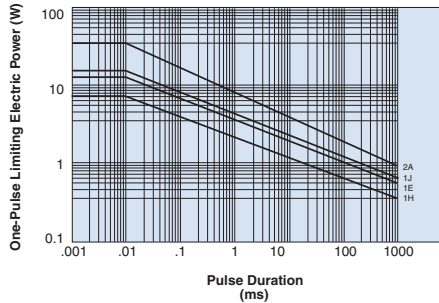

SR73 2B-W3A

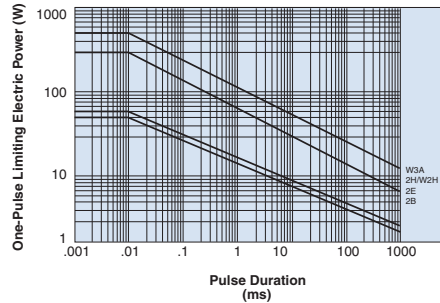

The maximum applicable voltage is equal to the max. overload voltage. Please contact factory for resistance characteristics of continuous applied pulse.

### Performance Characteristics

| Parameter                   | Requirement $\Delta R \pm(\%+0.005)$ |   | Test Method  |
|-----------------------------|--------------------------------------|---|--|
|                             | Limit                                | Typical                                 |  |
| Resistance                  | Within specified tolerance           | —                                       | 25°C   |
| T.C.R.                      | Within specified T.C.R.              | —                                       | +25°C/-55°C and +25°C/+125°C   |
| Overload (Short time)       | $\pm 2\%$                            | $\pm 0.5\%$                             | Rated voltage x 2.5 for 5 seconds  |
| Resistance to Solder Heat   | 1H: $\pm 3\%$ ,<br>1E~W3A: $\pm 1\%$ | 1H: $\pm 0.75\%$<br>1E~W3A: $\pm 0.3\%$ | 260°C $\pm 5^\circ\text{C}$ , 10 seconds $\pm 1$ second                          |
| Rapid Change of Temperature | $\pm 1\%$                            | $\pm 0.3\%$                             | -40°C (30 minutes), +125°C (30 minutes), 100 cycles                              |
| Moisture Resistance         | 1H: $\pm 3\%$<br>1E~W3A: $\pm 2\%$   | $\pm 1\%$                               | 40°C $\pm 2^\circ\text{C}$ , 90%-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle |
| Endurance at 70°C           | 1H: $\pm 3\%$<br>1E~W3A: $\pm 2\%$   | $\pm 1\%$                               | 70°C $\pm 2^\circ\text{C}$ , 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle             |
| High Temperature Exposure   | $\pm 1\%$                            | $\pm 0.3\%$                             | 1H: +125°C, 1000 hours; 1E, 1J, 2A, 2B, 2E, 2H/W2H, 3A/W3A: +150°C, 1000 hours   |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Current Sense Resistors - SMD category](#):*

*Click to view products by [KOA Speer manufacturer](#):*

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [PFS35-200RF1](#) [NPS 2-T126 5.000 OHM 1%](#) [PFS35-0R01J1](#) [PFS35-0R05J1](#) [PFS35-5RF1](#) [CD2015FC-0.10-1%](#)  
[PR2512FKF7W0R004L](#) [RC1005F124CS](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [LRC-](#)  
[LR2512LF-01-R820J](#) [WR06X104JGLJ](#) [TL2BR01F](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#) [RL7520WT-R002-F](#) [LRF2010-R003JW](#)  
[KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [RLP73M1ER051FTDF](#) [RLP73M2AR075FTDF](#) [SR731ERTTP5R10F](#) [SR731ERTTP100J](#)  
[SR731ERTTP6R80F](#) [SR731ERTTP4R70F](#) [SR731ERTTP2R20F](#) [SR731ERTTP3R90F](#) [SR731ERTTP1R00F](#) [SR731ERTTP10R0F](#)  
[SR731ERTTP2R00F](#) [SR731ERTTP8R20F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#) [SR731ERTTP2R0J](#) [SR731ERTTP4R7J](#)  
[SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#) [SR731ERTTP9R10F](#) [FCSL64R007JER](#)  
[LRF1206-R018FW](#) [TLR2B10DR022FTDG](#) [TLR2H10DR01FTDG](#) [73L4R10G](#)