


MDA Series
SMD Low Profile High Current Molded Inductor
Size 1050




FEATURES

- Shielded construction
- Capable of corresponding high frequency .
- Low loss realized with low DCR.
- High performance (Isat) realized by metal dust core.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 500PCS


APPLICATION

- Headlamps, tail lamps and interior lighting
- HVAC
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation

Dimensions: [mm]

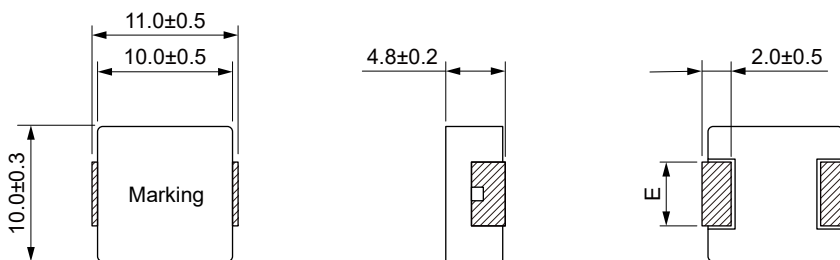

Land Pattern: [mm]



Electrical Properties:










Part No	Inductance @ 100KHz/1V (µH)	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Saturation Current Typ. (A)	Saturation Current Max. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)	E
MDA1050-R36M	0.36	±20%	34.0	30.0	52.0	46.0	0.82	0.92	3.0±0.3
MDA1050-R47M	0.47	±20%	33.0	29.0	46.0	40.0	1.15	1.32	3.0±0.3
MDA1050-R68M	0.68	±20%	28.0	25.0	35.0	32.0	1.60	1.90	2.5±0.3
MDA1050-1R0M	1.00	±20%	25.0	23.0	33.0	30.0	2.60	3.00	2.5±0.3
MDA1050-1R5M	1.50	±20%	23.0	21.0	27.0	24.0	3.40	3.80	2.5±0.3
MDA1050-2R2M	2.20	±20%	19.5	17.5	20.0	18.0	5.10	5.60	3.0±0.3
MDA1050-3R3M	3.30	±20%	17.0	15.0	17.5	15.5	8.10	9.10	3.0±0.3
MDA1050-4R7M	4.70	±20%	15.0	13.0	16.0	14.0	9.30	10.5	3.0±0.3
MDA1050-5R6M	5.60	±20%	13.0	11.0	15.0	12.5	12.8	14.4	3.0±0.3
MDA1050-6R8M	6.80	±20%	12.0	10.0	14.0	12.0	15.0	17.3	3.0±0.3
MDA1050-8R2M	8.20	±20%	10.0	8.5	13.5	11.5	16.1	18.8	3.0±0.3
MDA1050-100M	10.0	±20%	7.6	7.2	13.0	11.0	18.9	21.8	3.0±0.3
MDA1050-150M	15.0	±20%	6.5	6.0	8.5	7.5	32.0	39.0	3.0±0.3
MDA1050-220M	22.0	±20%	6.0	5.5	6.0	5.5	44.0	54.0	3.0±0.3








Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Saturation Current Typ. (A)	Saturation Current Max. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)	E
MDA1050-330M	33.0	±20%	5.5	5.0	5.8	5.2	74.0	86.0	3.0±0.3
MDA1050-470M	47.0	±20%	4.5	4.0	4.0	3.5	106	127	3.0±0.3

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

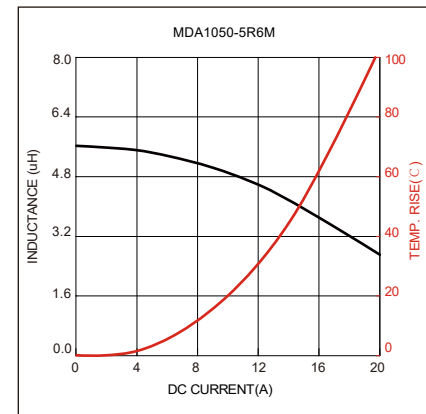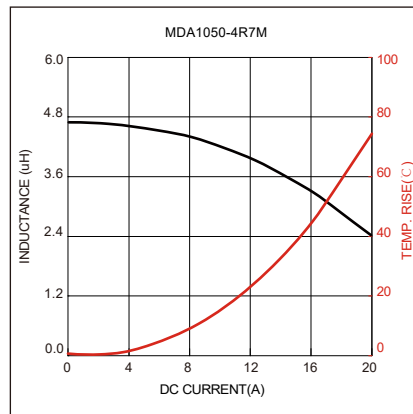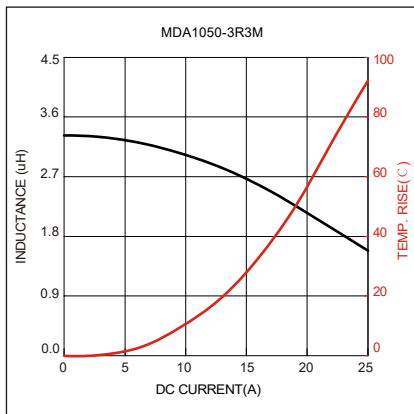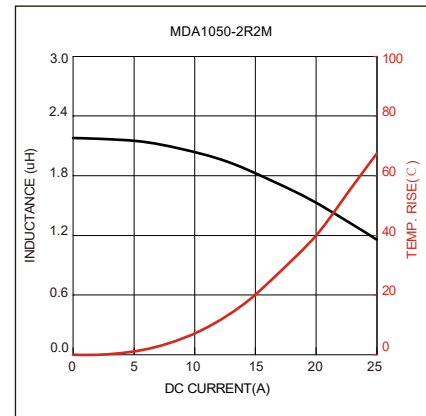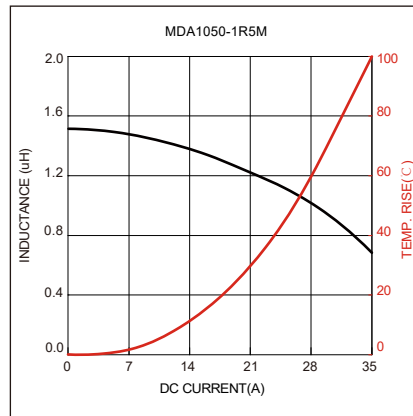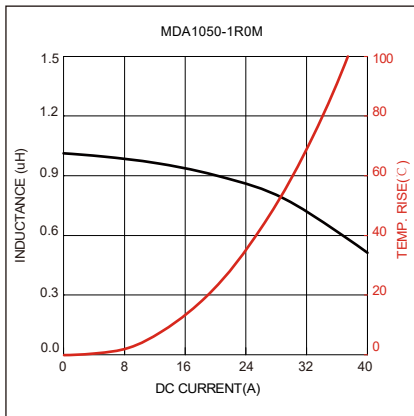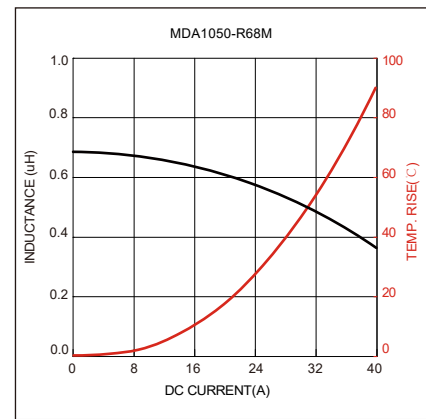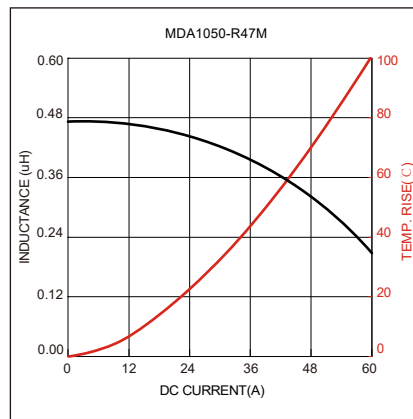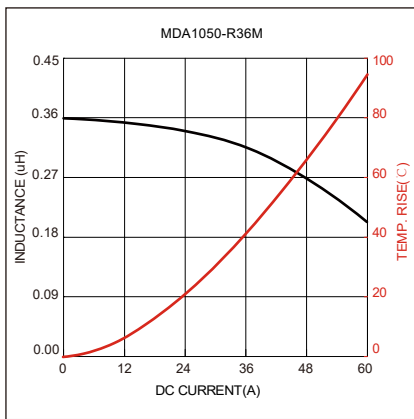

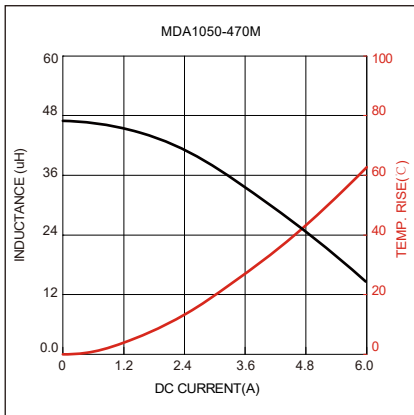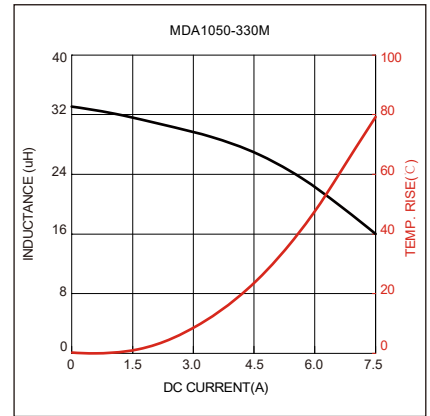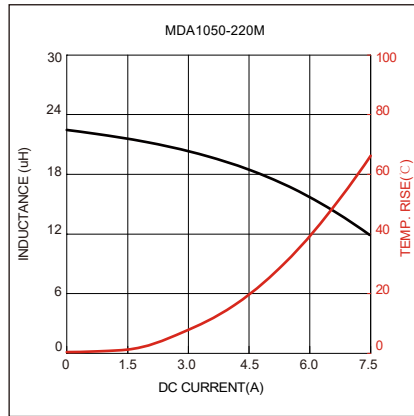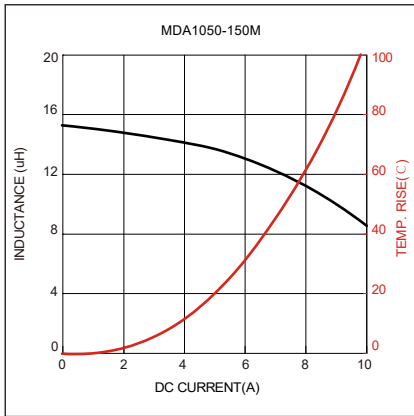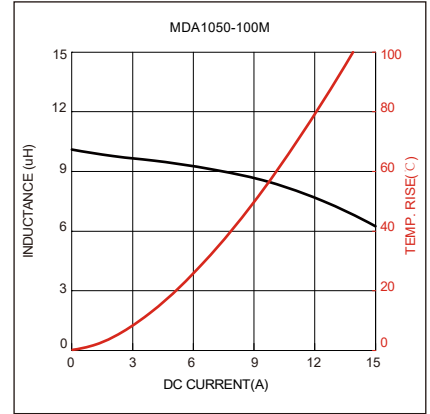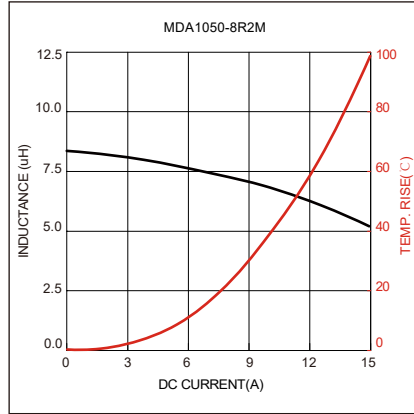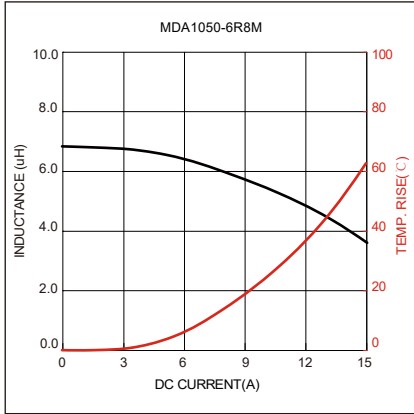

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)