

MDE Series
Molding Power Inductors
Size 0630




FEATUERS

- High rated current
- Frequency up to 3 MHz
- 125 °C maximum total temperature operation
- Low core loss
- Ultra low buzz noise due to molding construction
- Halogen Free & ROHS compliant
- Quantity: 1500pcs


APPLICATION

- Laptops and PCs
- Switch and servers
- Base stations
- DC/DC converters
- Battery powered devices
- SSD modules

Dimensions: [mm]

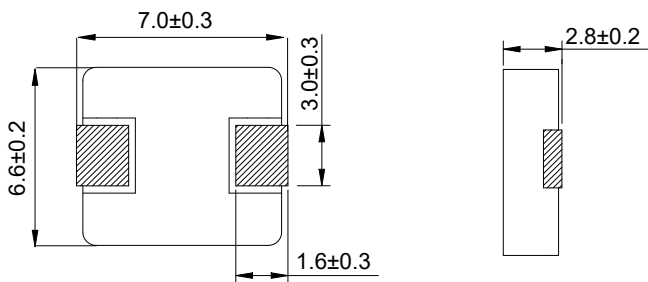

Land Pattern: [mm]



Electrical Properties:


Part No.	L@100KHz /1V (μH)	Tolerance	R _{DC} Max. (mΩ)	I _{sat} Typ. (A)	I _R Typ. (A)
MDE0630-R22M	0.22	±20%	3	34	24
MDE0630-R33M	0.33	±20%	3.5	25	21
MDE0630-R47M	0.47	±20%	4.1	20	18
MDE0630-R56M	0.56	±20%	4.5	18	16.5
MDE0630-R68M	0.68	±20%	5.3	17	16
MDE0630-R82M	0.82	±20%	6.0	16	14
MDE0630-1R0M	1.0	±20%	7.4	15	12
MDE0630-1R5M	1.5	±20%	12.1	12	12
MDE0630-2R2M	2.2	±20%	15	10	9.5

Part No.	L@100KHz /1V (μH)	Tolerance	R _{DC} Max. (mΩ)	I _{sat} Typ. (A)	I _R Typ. (A)
MDE0630-3R3M	3.3	±20%	22	9.5	8.5
MDE0630-4R7M	4.7	±20%	33	9	6
MDE0630-5R6M	5.6	±20%	42	6.5	5.5
MDE0630-6R8M	6.8	±20%	48	6	5
MDE0630-8R2M	8.2	±20%	60	5.5	5
MDE0630-100M	10	±20%	68	5.5	4.5
MDE0630-150M	15	±20%	113	4.0	3
MDE0630-220M	22	±20%	170	3	2.5
MDE0630-330M	33	±20%	270	2.5	2
MDE0630-470M	47	±20%	385	2	1.5


Operating temperature range - 55 °C to + 125 °C
 I_R will cause the coil temperature approximate ΔT40 °C
 I_{sat} will cause to drop approximately 30 %

Typical Electrical Characteristics:

Inductance vs DC Current Characteristics:

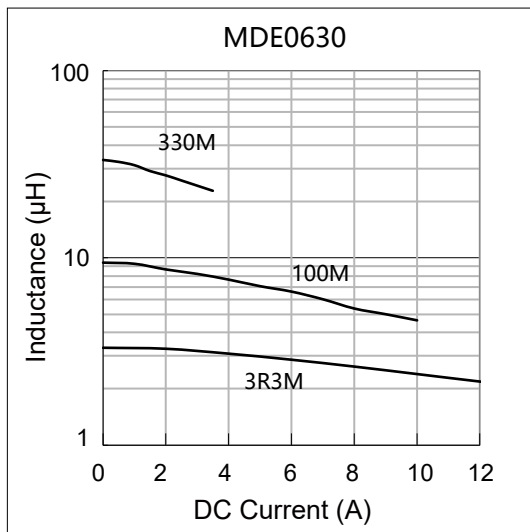

Temperature Rise vs DC Current Characteristics:

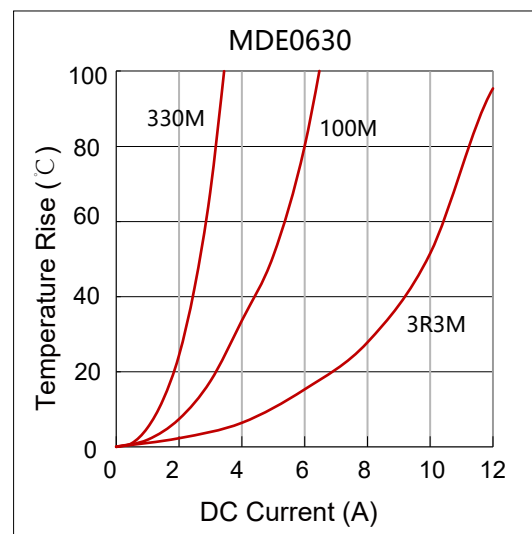

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)