

NRSE Series
SMD Shielded Tiny Power Inductor
Size 2512






CHARACTERISTICS

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 2000pcs


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]

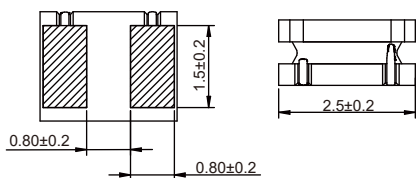

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance (μH)	Tolerance	Saturation current Max. (A)	Saturation current Typ. (A)	Temperature Rise Current Max. (A)	Temperature Rise Current Typ. (A)	DCR Max. (Ω)
NRSE2512-R24M	0.24	±20%	4.10	4.80	4.10	4.50	0.023
NRSE2512-R33M	0.33	±20%	4.00	4.70	3.35	3.70	0.031
NRSE2512-R47M	0.47	±20%	3.80	4.50	3.00	3.30	0.036
NRSE2512-R68M	0.68	±20%	3.00	3.30	2.30	2.50	0.047
NRSE2512-1R0M	1.0	±20%	2.25	2.50	2.30	2.60	0.060
NRSE2512-1R2M	1.2	±20%	2.20	2.50	2.00	2.20	0.078
NRSE2512-1R5M	1.5	±20%	2.00	2.35	1.80	2.00	0.090
NRSE2512-1R8M	1.8	±20%	1.95	2.20	1.75	1.90	0.108
NRSE2512-2R2M	2.2	±20%	1.75	1.90	1.75	1.90	0.108
NRSE2512-2R7M	2.7	±20%	1.30	1.60	1.40	1.50	0.156
NRSE2512-3R3M	3.3	±20%	1.20	1.35	1.40	1.50	0.156
NRSE2512-4R7M	4.7	±20%	1.10	1.20	1.10	1.20	0.228
NRSE2512-5R6M	5.6	±20%	1.00	1.10	1.00	1.15	0.330
NRSE2512-6R8M	6.8	±20%	0.90	1.10	0.95	1.05	0.360
NRSE2512-100M	10	±20%	0.70	0.85	0.78	0.86	0.522
NRSE2512-150M	15	±20%	0.60	0.70	0.50	0.60	1.000
NRSE2512-220M	22	±20%	0.45	0.55	0.48	0.55	1.290


Operating temperature : -40 °C ~ +125 °C

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 °C


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

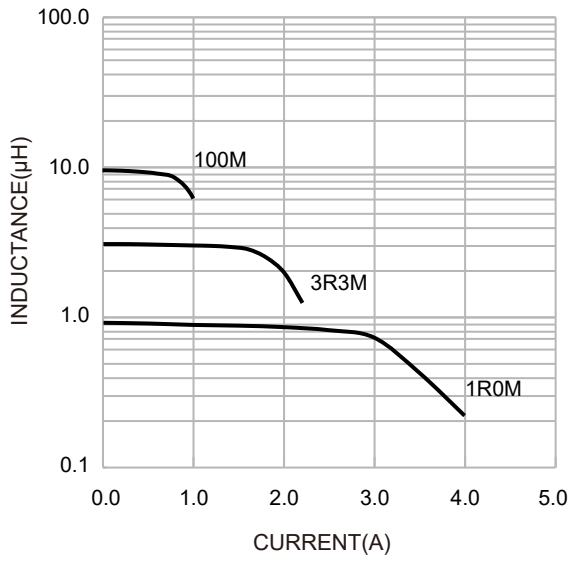

Temperture Rise VS. Current Characteristics:

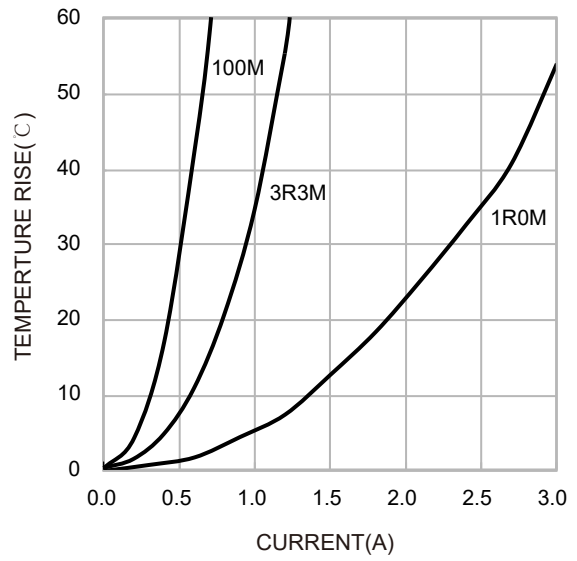

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)