


NRSE Series
SMD Shielded Tiny Power Inductor
Size 4018




CHARACTERISTICS

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 3000pcs


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]

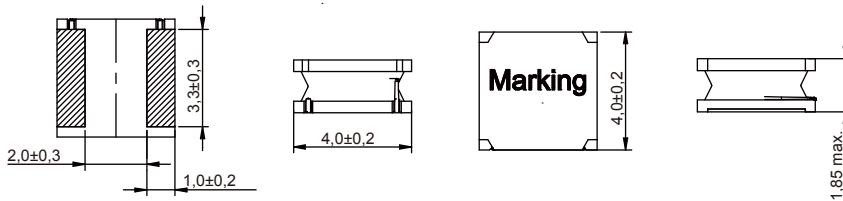

Land Pattern: [mm]



Electrical Properties:

| Part No | Inductance (μH) | Tolerance | Saturation current (A) | Temperature Rise Current (A) | DCR ±30% (mΩ) |
|---------------|-----------------|-----------|------------------------|------------------------------|---------------|
| NRSE4018-R56N | 0.56 | ±30% | 6.50 | 3.50 | 18 |
| NRSE4018-R68N | 0.68 | ±30% | 4.90 | 3.20 | 18 |
| NRSE4018-1R0N | 1.0 | ±30% | 4.50 | 2.50 | 23 |
| NRSE4018-1R2N | 1.2 | ±30% | 4.30 | 2.40 | 28 |
| NRSE4018-1R5N | 1.5 | ±30% | 3.35 | 2.34 | 33 |
| NRSE4018-1R8N | 1.8 | ±30% | 3.00 | 2.00 | 44 |
| NRSE4018-2R2M | 2.2 | ±20% | 2.70 | 2.00 | 44 |
| NRSE4018-3R3M | 3.3 | ±20% | 2.45 | 1.90 | 70 |
| NRSE4018-4R7M | 4.7 | ±20% | 1.70 | 1.70 | 90 |
| NRSE4018-5R6M | 5.6 | ±20% | 1.60 | 1.50 | 103 |
| NRSE4018-6R8M | 6.8 | ±20% | 1.45 | 1.30 | 124 |
| NRSE4018-8R2M | 8.2 | ±20% | 1.40 | 1.15 | 180 |
| NRSE4018-100M | 10 | ±20% | 1.30 | 1.10 | 200 |
| NRSE4018-120M | 12 | ±20% | 1.15 | 0.95 | 230 |
| NRSE4018-150M | 15 | ±20% | 0.94 | 0.92 | 268 |
| NRSE4018-180M | 18 | ±20% | 0.86 | 0.61 | 320 |

| Part No | Inductance (μH) | Tolerance | Saturation current (A) | Temperature Rise Current (A) | DCR ±30% (mΩ) |
|---------------|-----------------|-----------|------------------------|------------------------------|---------------|
| NRSE4018-220M | 22 | ±20% | 0.80 | 0.80 | 390 |
| NRSE4018-330M | 33 | ±20% | 0.65 | 0.60 | 560 |
| NRSE4018-470M | 47 | ±20% | 0.57 | 0.50 | 850 |


Operating temperature : -40 C ~ +125 C

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 C


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

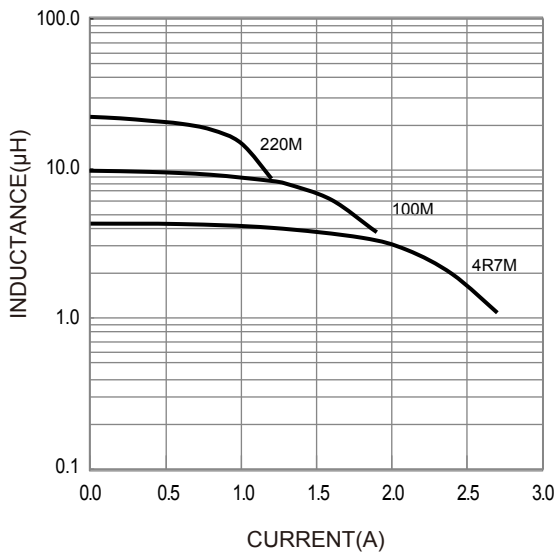

Temperature Rise VS. Current Characteristics:

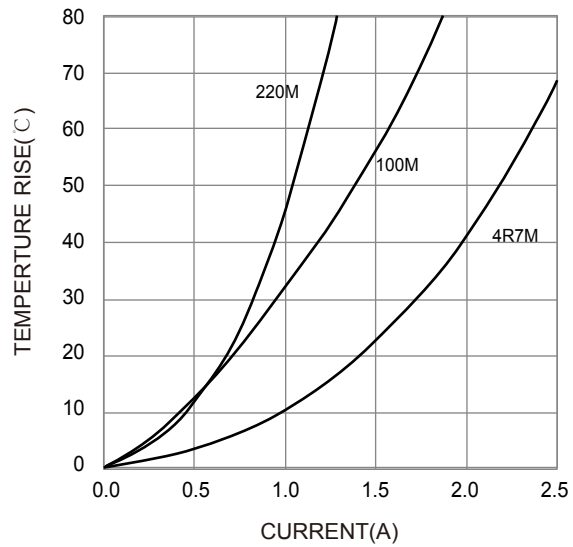

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)