

**NRSE Series**  
**SMD Shielded Tiny Power Inductor**  
**Size 4018**




**CHARACTERISTICS**

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 3000pcs


**APPLICATION**

- DC/DC converter
- LC filter

Dimensions: [mm]

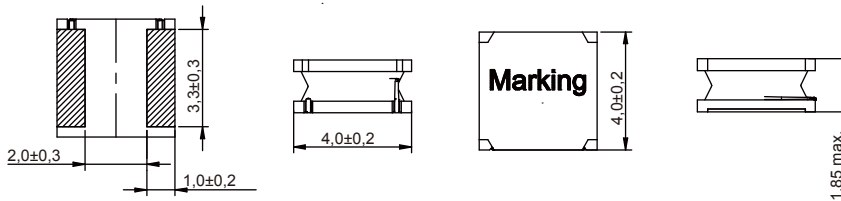

Land Pattern: [mm]

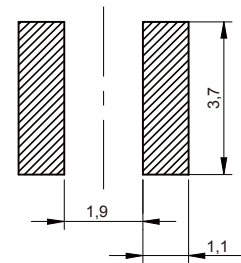

**Electrical Properties:**

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE4018-R56N	0.56	±30%	6.50	3.50	18
NRSE4018-R68N	0.68	±30%	4.90	3.20	18
NRSE4018-1R0N	1.0	±30%	4.50	2.50	23
NRSE4018-1R2N	1.2	±30%	4.30	2.40	28
NRSE4018-1R5N	1.5	±30%	3.35	2.34	33
NRSE4018-1R8N	1.8	±30%	3.00	2.00	44
NRSE4018-2R2M	2.2	±20%	2.70	2.00	44
NRSE4018-3R3M	3.3	±20%	2.45	1.90	70
NRSE4018-4R7M	4.7	±20%	1.70	1.70	90
NRSE4018-5R6M	5.6	±20%	1.60	1.50	103
NRSE4018-6R8M	6.8	±20%	1.45	1.30	124
NRSE4018-8R2M	8.2	±20%	1.40	1.15	180
NRSE4018-100M	10	±20%	1.30	1.10	200
NRSE4018-120M	12	±20%	1.15	0.95	230
NRSE4018-150M	15	±20%	0.94	0.92	268
NRSE4018-180M	18	±20%	0.86	0.61	320

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE4018-220M	22	±20%	0.80	0.80	390
NRSE4018-330M	33	±20%	0.65	0.60	560
NRSE4018-470M	47	±20%	0.57	0.50	850


Operating temperature : -40 C ~ +125 C

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 C


Saturation Current that will cause initial inductance to drop approximately 30%

### Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

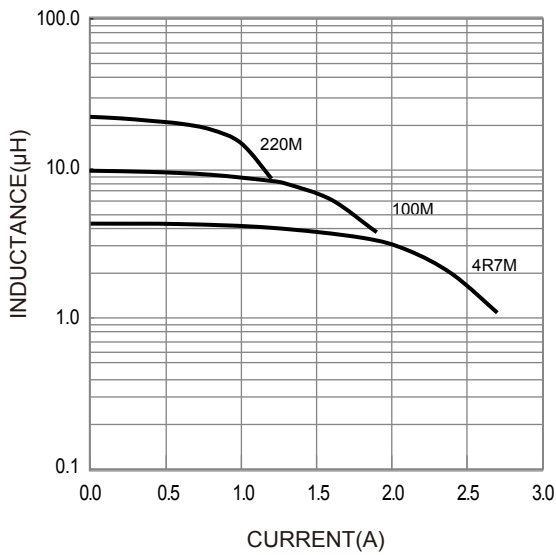

Temperature Rise VS. Current Characteristics:

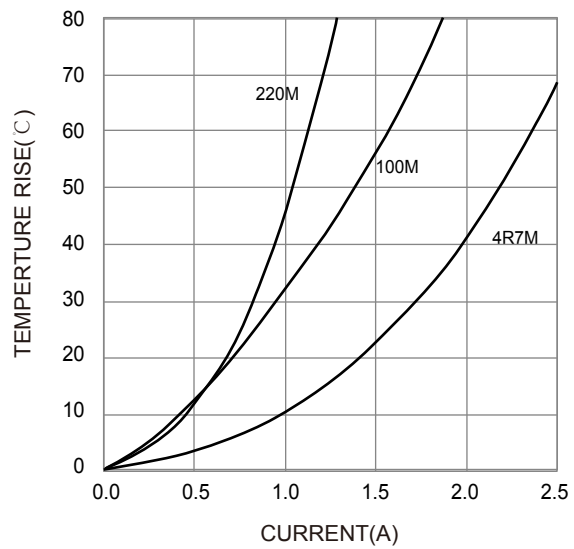

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)  
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)  
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)  
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)  
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)  
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)