

NRSE Series

SMD Shielded Tiny Power Inductor Size 4030






CHARACTERISTICS

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 2000pcs


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]



Land Pattern: [mm]



Electrical Properties:

Part No	Inductance (μ H)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR $\pm 30\%$ (m Ω)
NRSE4030-R47N	0.47	$\pm 30\%$	7.50	4.00	11
NRSE4030-R56N	0.56	$\pm 30\%$	6.00	4.00	14
NRSE4030-1R0N	1.0	$\pm 30\%$	5.90	3.40	15
NRSE4030-1R5N	1.5	$\pm 30\%$	4.85	3.30	25
NRSE4030-1R8N	1.8	$\pm 30\%$	4.25	3.20	30
NRSE4030-2R2M	2.2	$\pm 20\%$	4.10	2.95	35
NRSE4030-3R3M	3.3	$\pm 20\%$	3.30	2.40	40
NRSE4030-4R7M	4.7	$\pm 20\%$	2.90	2.00	60
NRSE4030-5R6M	5.6	$\pm 20\%$	2.75	1.95	70
NRSE4030-6R8M	6.8	$\pm 20\%$	2.60	1.70	75
NRSE4030-7R5M	7.5	$\pm 20\%$	2.20	1.65	90
NRSE4030-8R2M	8.2	$\pm 20\%$	2.10	1.60	100
NRSE4030-100M	10	$\pm 20\%$	1.95	1.50	115
NRSE4030-120M	12	$\pm 20\%$	1.70	1.35	140
NRSE4030-150M	15	$\pm 20\%$	1.65	1.15	190
NRSE4030-180M	18	$\pm 20\%$	1.40	1.10	215
NRSE4030-220M	22	$\pm 20\%$	1.30	1.00	225

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE4030-330M	33	±20%	1.10	0.84	330
NRSE4030-470M	47	±20%	0.90	0.72	500
NRSE4030-560M	56	±20%	0.85	0.65	560
NRSE4030-680M	68	±20%	0.75	0.55	750
NRSE4030-820M	82	±20%	0.68	0.50	950
NRSE4030-101M	100	±20%	0.60	0.45	1150
NRSE4030-151M	150	±20%	0.50	0.35	2350
NRSE4030-181M	180	±20%	0.40	0.35	2500
NRSE4030-221M	220	±20%	0.40	0.30	3000
NRSE4030-331M	330	±20%	0.30	0.23	4400
NRSE4030-471M	470	±20%	0.30	0.20	5500


Operating temperature : -40 °C ~ +125 °C

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 °C


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

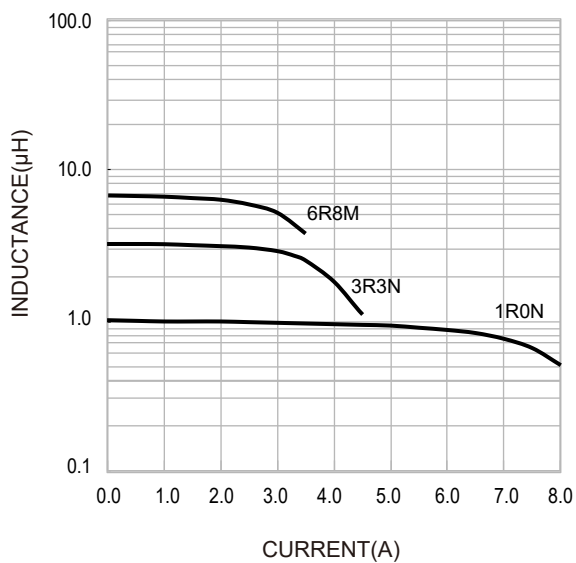

Temperature Rise VS. Current Characteristics:

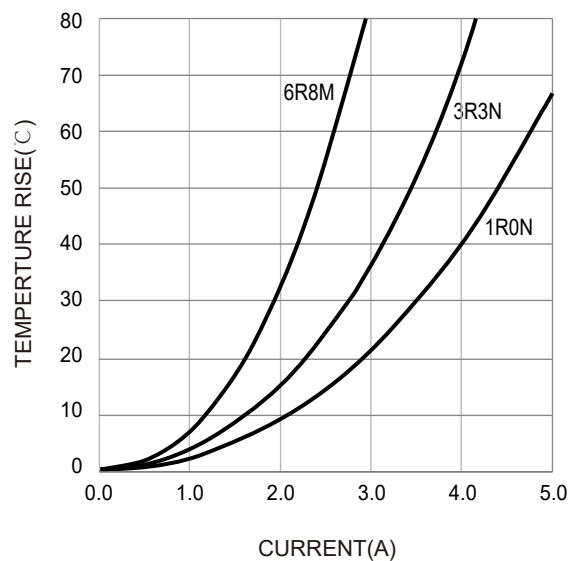

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)