

NRSE Series
SMD Shielded Tiny Power Inductor
Size 4030




CHARACTERISTICS

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 2000pcs


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]

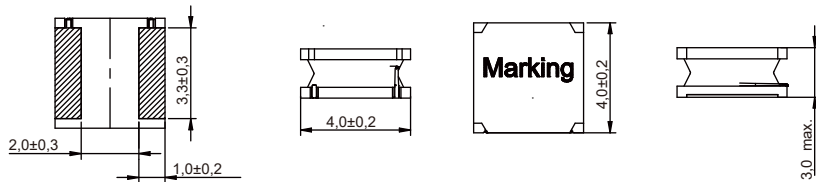

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE4030-R47N	0.47	±30%	7.50	4.00	11
NRSE4030-R56N	0.56	±30%	6.00	4.00	14
NRSE4030-1R0N	1.0	±30%	5.90	3.40	15
NRSE4030-1R5N	1.5	±30%	4.85	3.30	25
NRSE4030-1R8N	1.8	±30%	4.25	3.20	30
NRSE4030-2R2M	2.2	±20%	4.10	2.95	35
NRSE4030-3R3M	3.3	±20%	3.30	2.40	40
NRSE4030-4R7M	4.7	±20%	2.90	2.00	60
NRSE4030-5R6M	5.6	±20%	2.75	1.95	70
NRSE4030-6R8M	6.8	±20%	2.60	1.70	75
NRSE4030-7R5M	7.5	±20%	2.20	1.65	90
NRSE4030-8R2M	8.2	±20%	2.10	1.60	100
NRSE4030-100M	10	±20%	1.95	1.50	115
NRSE4030-120M	12	±20%	1.70	1.35	140
NRSE4030-150M	15	±20%	1.65	1.15	190
NRSE4030-180M	18	±20%	1.40	1.10	215
NRSE4030-220M	22	±20%	1.30	1.00	225

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE4030-330M	33	±20%	1.10	0.84	330
NRSE4030-470M	47	±20%	0.90	0.72	500
NRSE4030-560M	56	±20%	0.85	0.65	560
NRSE4030-680M	68	±20%	0.75	0.55	750
NRSE4030-820M	82	±20%	0.68	0.50	950
NRSE4030-101M	100	±20%	0.60	0.45	1150
NRSE4030-151M	150	±20%	0.50	0.35	2350
NRSE4030-181M	180	±20%	0.40	0.35	2500
NRSE4030-221M	220	±20%	0.40	0.30	3000
NRSE4030-331M	330	±20%	0.30	0.23	4400
NRSE4030-471M	470	±20%	0.30	0.20	5500


Operating temperature : -40 C ~ +125 C

Temperature rise current: the actual value of DC current when the temperature is ΔT40 C


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

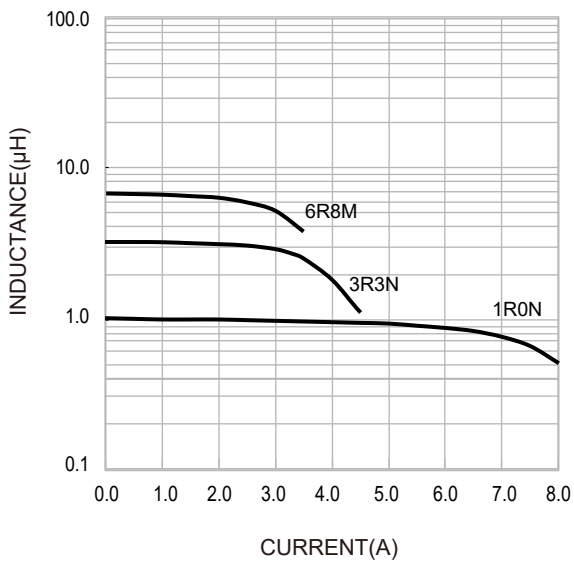

Temperature Rise VS. Current Characteristics:

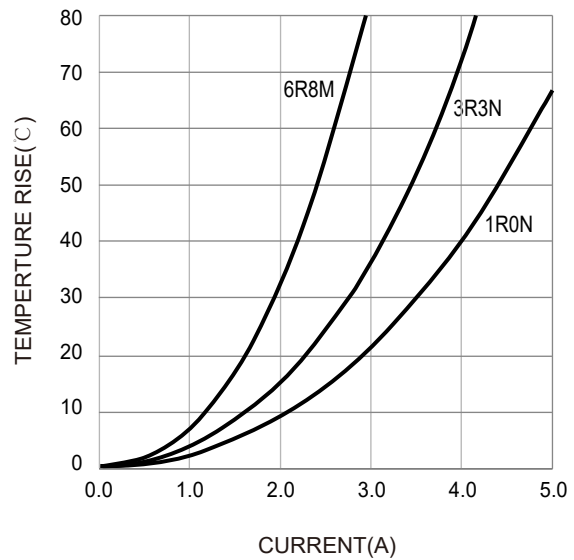

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-](#)
[53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-](#)
[471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-](#)
[4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#)
[ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)