

NRSE Series
SMD Shielded Tiny Power Inductor
Size 5040




CHARACTERISTICS

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape
- Quantity: 1500pcs


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]

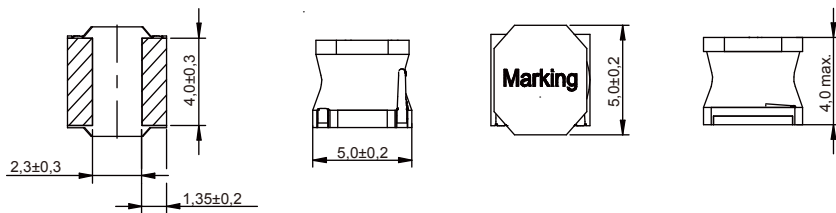

Land Pattern: [mm]



Electrical Properties:

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE5040-1R0N	1.0	±30%	7.35	4.9	13
NRSE5040-1R5N	1.5	±30%	6.3	4.3	15
NRSE5040-1R8N	1.8	±30%	6.1	3.9	18
NRSE5040-2R2N	2.2	±30%	4.9	3.8	19
NRSE5040-2R7N	2.7	±30%	4.3	3.6	22
NRSE5040-3R3N	3.3	±30%	3.95	3.4	24
NRSE5040-3R9N	3.9	±30%	3.55	3.2	27
NRSE5040-4R7M	4.7	±20%	3.5	3.0	30
NRSE5040-5R6M	5.6	±20%	3.2	2.8	33
NRSE5040-6R8M	6.8	±20%	2.9	2.5	43
NRSE5040-8R2M	8.2	±20%	3.0	2.3	55
NRSE5040-100M	10	±20%	2.35	2.1	64
NRSE5040-150M	15	±20%	2.0	2.0	86
NRSE5040-220M	22	±20%	1.6	1.5	129
NRSE5040-270M	27	±20%	1.5	1.3	165
NRSE5040-330M	33	±20%	1.3	1.2	188

Part No	Inductance (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE5040-390M	39	±20%	1.2	1.1	225
NRSE5040-470M	47	±20%	1.1	1.0	270
NRSE5040-560M	56	±20%	1.0	0.9	375
NRSE5040-680M	68	±20%	0.9	0.8	400
NRSE5040-101M	100	±20%	0.75	0.7	560
NRSE5040-221M	220	±20%	0.45	0.4	1200
NRSE5040-471M	470	±20%	0.40	0.3	2800


Operating temperature : -40 °C ~ +125 °C

Temperature rise current: the actual value of DC current when the temperature rise is ΔT40 °C


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

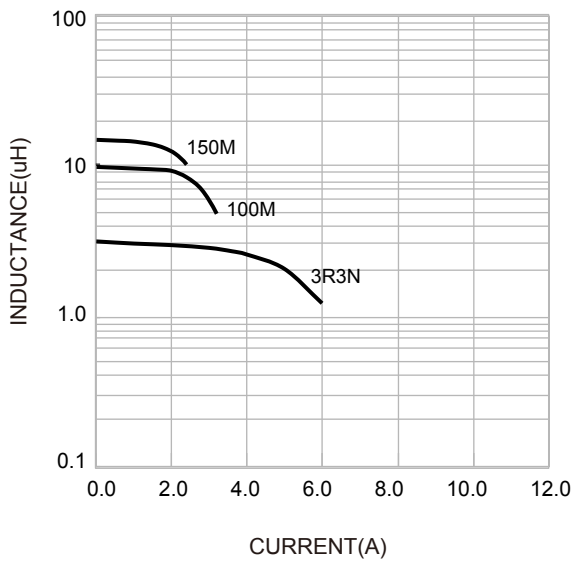

Temperature Rise VS. Current Characteristics:

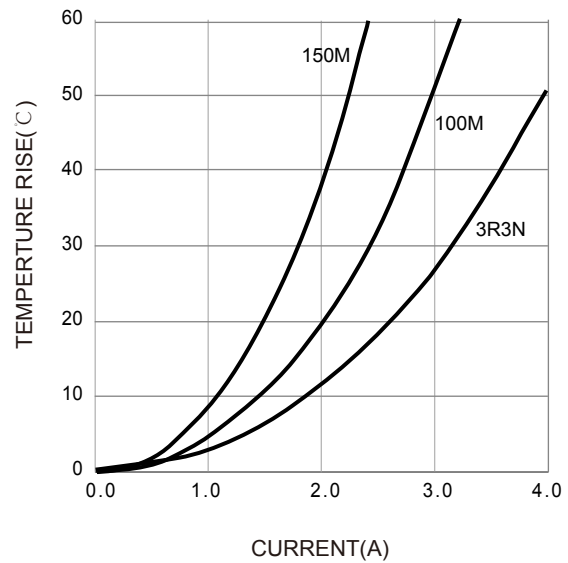

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)