

NRSE Series

SMD Shielded Tiny Power Inductor
Size 6045






CHARACTERISTICS

- Magnetic resin for higher current and semi-magnetically shielded
- Different sizes from 2mm to 8mm in square shape


APPLICATION

- DC/DC converter
- LC filter

Dimensions: [mm]



Land Pattern: [mm]



Electrical Properties:

Part No	Inductance (μ H)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR $\pm 30\%$ (m Ω)
NRSE6045-R56N	0.56	$\pm 30\%$	14.5	6.2	7.5
NRSE6045-1R0N	1.0	$\pm 30\%$	9.0	5.1	10
NRSE6045-1R5N	1.5	$\pm 30\%$	7.5	4.75	12
NRSE6045-1R8N	1.8	$\pm 30\%$	7.5	4.6	13
NRSE6045-2R2N	2.2	$\pm 30\%$	6.5	4.6	13
NRSE6045-3R3N	3.3	$\pm 30\%$	5.3	3.2	20
NRSE6045-3R9N	3.9	$\pm 30\%$	4.9	3.2	20
NRSE6045-4R7N	4.7	$\pm 30\%$	4.5	3.0	24
NRSE6045-5R6N	5.6	$\pm 30\%$	3.7	2.8	31
NRSE6045-6R8M	6.8	$\pm 20\%$	3.3	2.7	33
NRSE6045-8R2M	8.2	$\pm 20\%$	3.2	2.6	45
NRSE6045-100M	10	$\pm 20\%$	3.0	2.5	52
NRSE6045-120M	12	$\pm 20\%$	2.8	2.2	58
NRSE6045-150M	15	$\pm 20\%$	2.5	1.9	77
NRSE6045-180M	18	$\pm 20\%$	2.2	1.75	95
NRSE6045-220M	22	$\pm 20\%$	2.0	1.5	115

Part No	Inductance (μ H)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR $\pm 30\%$ (m Ω)
NRSE6045-270M	27	$\pm 20\%$	1.9	1.48	120
NRSE6045-330M	33	$\pm 20\%$	1.6	1.45	150
NRSE6045-390M	39	$\pm 20\%$	1.5	1.25	180
NRSE6045-470M	47	$\pm 20\%$	1.4	1.2	220
NRSE6045-560M	56	$\pm 20\%$	1.3	1.1	260
NRSE6045-680M	68	$\pm 20\%$	1.2	0.9	290
NRSE6045-820M	82	$\pm 20\%$	1.1	0.85	355
NRSE6045-101M	100	$\pm 20\%$	1.0	0.80	430
NRSE6045-121M	120	$\pm 20\%$	0.85	0.75	530
NRSE6045-151M	150	$\pm 20\%$	0.80	0.70	760
NRSE6045-181M	180	$\pm 20\%$	0.75	0.65	845
NRSE6045-221M	220	$\pm 20\%$	0.63	0.55	890


Operating temperature : -40 °C ~ +125 °C

Temperature rise current: the actual value of DC current when the temperature rise is $\Delta T_{40}^{\circ}\text{C}$


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

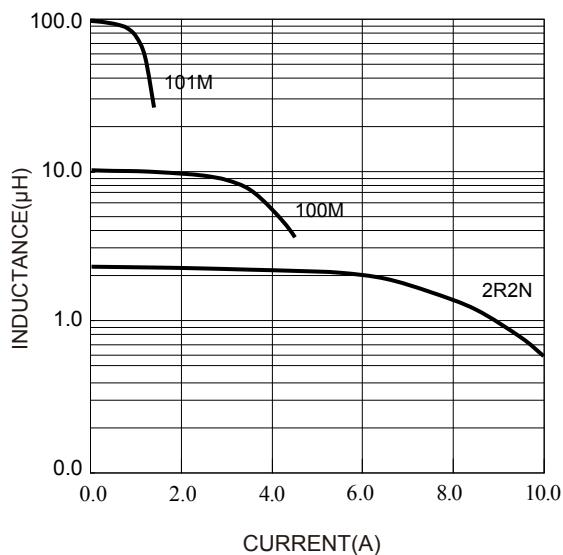

Temperature Rise VS. Current Characteristics:

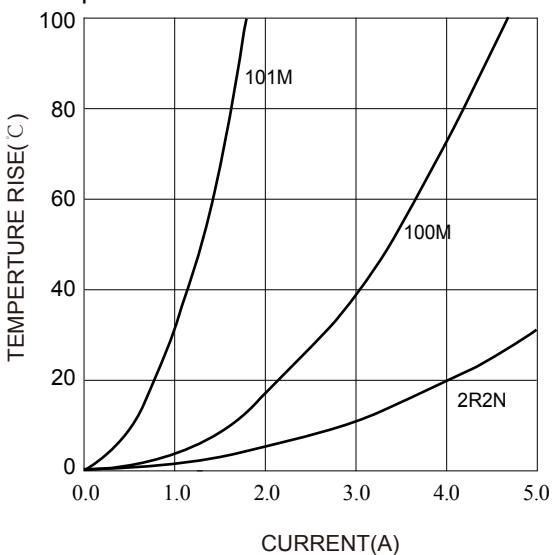

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by KOHER manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3680J000](#) [ELJ-RE27Njf2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)