

SDRH Series
SMD Shielded Power Inductor
Size 7345




FEATURES

Magnetically shielded version which results in a low leakage field;
 Highest possible current loading for SMD Inductors;
 Low self-losses;
 Quantity: 1000pcs;


APPLICATIONS

Perfectly suitable for switching regulators with high efficiency;
 Integrated DC/DC-converter;
 Switching regulators with low operating voltages;

Dimensions: [mm]

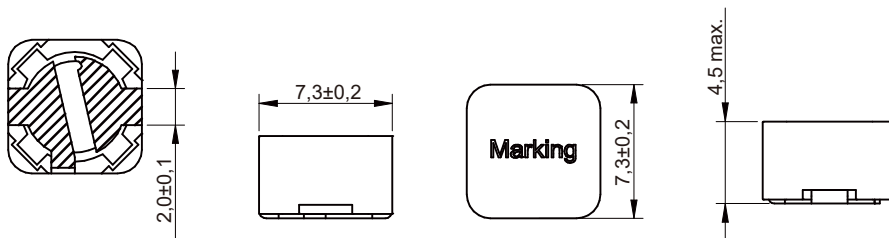

Land Patterns: [mm]

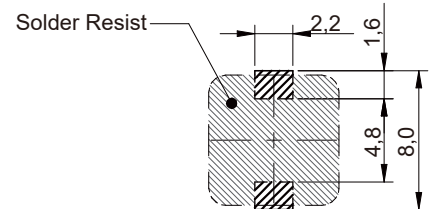

Electrical Properties:

Part No	Inductance (µH)	Tolerance	Temperature Rise Current (A)	Saturation Current (A)	DCR Typ (Ω)	DCR Max. (Ω)
SDRH7345-1R0M	1.0	±20%	6.84	9.0	0.0084	0.01
SDRH7345-2R2M	2.2	±20%	6.0	6.5	0.013	0.02
SDRH7345-3R3M	3.3	±20%	3.5	4.6	0.025	0.03
SDRH7345-4R7M	4.7	±20%	3.2	4.0	0.025	0.04
SDRH7345-100M	10	±20%	2.0	2.6	0.045	0.049
SDRH7345-120M	12	±20%	1.82	2.4	0.054	0.058
SDRH7345-150M	15	±20%	1.6	2.2	0.07	0.081
SDRH7345-180M	18	±20%	1.5	2.05	0.08	0.091
SDRH7345-220M	22	±20%	1.41	1.7	0.09	0.11
SDRH7345-270M	27	±20%	1.24	1.55	0.117	0.15
SDRH7345-330M	33	±20%	1.13	1.4	0.14	0.17
SDRH7345-390M	39	±20%	1.11	1.23	0.145	0.23
SDRH7345-470M	47	±20%	1.03	1.1	0.17	0.26
SDRH7345-560M	56	±20%	0.93	1.05	0.207	0.35
SDRH7345-680M	68	±20%	0.87	0.95	0.239	0.38
SDRH7345-820M	82	±20%	0.84	0.9	0.257	0.43
SDRH7345-101M	100	±20%	0.79	0.75	0.29	0.61
SDRH7345-121M	120	±20%	0.67	0.7	0.4	0.66
SDRH7345-151M	150	±20%	0.52	0.63	0.66	0.88

Part No	Inductance (μH)	Tolerance	Temperature Rise Current (A)	Saturation Current (A)	DCR Typ (Ω)	DCR Max. (Ω)
SDRH7345-181M	180	±20%	0.51	0.56	0.68	0.98
SDRH7345-221M	220	±20%	0.44	0.54	0.92	1.17
SDRH7345-271M	270	±20%	0.43	0.48	0.97	1.64
SDRH7345-331M	330	±20%	0.39	0.45	1.15	1.86
SDRH7345-391M	390	±20%	0.38	0.42	1.25	2.85
SDRH7345-471M	470	±20%	0.29	0.34	1.6	3.01
SDRH7345-561M	560	±20%	0.28	0.31	1.72	3.62
SDRH7345-681M	680	±20%	0.23	0.28	2.6	4.63
SDRH7345-821M	820	±20%	0.21	0.26	3.0	5.2
SDRH7345-102M	1000	±20%	0.2	0.25	3.27	6.0

Operating Temperature : -40 °C ~ +125 °C

Saturation current will cause L to drop approximately 35% .

Temperature rise current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)